
Price List

JUMP TO PRICING CLICK HERE

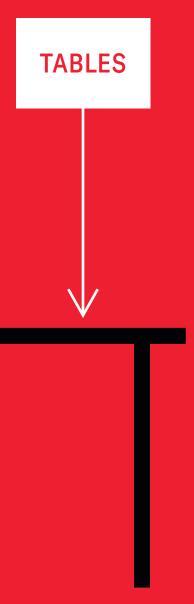

Parsons 01 March 2022

Prices

All prices are list price, effective with date printed on cover, and supersedes all other published price lists. Orders within the 48 contiguous United States will be assessed a freight charge based on a percentage of the total net price, or a flat rate of \$250*, whichever is greater. A minimum charge of \$300 * will apply to all shipments to Canada. Fees will be calculated using the zone map located on page 917. Normal delivery is on a dock-to-dock basis. Additional charges may apply on special requests noted on the customer's purchase order such as inside delivery, "call before," etc. Versteel reserves the right to change prices, shipping fees, or specifications without prior notice. Orders are accepted subject to price prevailing at time of shipment.

Acknowledgement

Orders are accepted, manufactured, and invoiced in accordance with the acknowledgement. Notify Versteel immediately of any discrepancies. Acknowledged orders may not be cancelled or modified without written consent from Versteel.

All orders must be received in writing, accompanied by final material and finish specifications for order entry.

CONTACT VERSTEEL

EMAIL contact@versteel.com

TELEPHONE 800 876 2120

812 634 2120

812 482 9318 **FACSIMILE**

MAILING ADDRESS

Versteel

2332 Cathy Lane Jasper, IN 47546

Faxed orders are accepted. Duplicate orders that are received by mail (after having been faxed) and not marked "Confirmation" are the responsibility of the customer.

Telephone orders must be confirmed in writing within 24 hours, marked "Confirmation." Duplicate orders not marked "Confirmation" are the responsibility of the customer.

Credit

You are requested to enclose one bank reference and three trade references with your initial order.

Versteel accepts Mastercard, Visa & AMEX credit card payment for invoiced sales. Credit card information must be presented along with the Sales Order (with a signed Credit Card Authorization Form attached). There is no cash discount extended to credit card orders. Credit cards will be charged at time of shipment. A 2.5% processing fee will be applied for all credit card purchases. Processing fee will not be applied to GSA or contract orders. Versteel will not accept credit cards for payment of account balances.

Changes or Cancellation

Any change or cancellation to an order must be submitted in writing and confirmed by Versteel Customer Service before the change or cancellation is effective. Due to short lead times, any change or cancellation may result in charges if materials have entered the production process.

Packaging

Versteel has no crate or packaging charge on standard products. All items are packaged to ensure delivery in excellent condition under normal handling by freight personnel. Versteel reserves the right to bulk pack or skid load tops in large quantities.

Shipping

Normal delivery is on a dock-to-dock basis, F.O.B. Versteel's factory in Jasper, Indiana. Special requests such as inside delivery, "call before," etc. should be noted on the customer's purchase order and are subject to additional charges. See freight program on page 917 for shipping charges. Parsons tables are shipped unassembled.

Orders shipping outside of the contiguous 48 United States will have shipping quoted as a separate item.

FOB ORIGIN, FREIGHT PREPAID

Versteel 2332 Cathy Lane Jasper, IN 47546

Shipping Damage Claims or Shortages

Legal title of merchandise passes to the buyer upon acceptance of the carrier. All cartons must be carefully inspected upon delivery. Visibly damaged product should not be accepted from the carrier until the damage is noted on delivery receipt. Versteel will not accept responsibility if the delivery receipt is signed as "clear". Retain any damaged goods and take photos for claim filing purposes. Details of visible damage should be noted on the delivery receipt. Shortages must be noted on the bill of lading prior to accepting the shipment.

Concealed Damage

If concealed damage is discovered, the receiver must notify the freight carrier within 5 business days from receipt of the product(s). For claim consideration the receiver must request an inspection of the damaged goods by the carrier. All damaged product and packaging should be retained and photos taken for claim filing use. Inspections must occur at the original delivery point to be considered for claim submittal. Reports of concealed damage after five business days will not be considered.

Partial Shipments

Versteel makes every attempt to ship orders complete and on schedule. However, we reserve the right to make partial shipments as product is ready, in an effort to get your order to you as quickly as possible. Invoices covering these shipments are to be paid as they become due.

No return merchandise will be accepted without Versteel's written consent and shipping instructions. Unauthorized returns will not be accepted.

Terms

Terms are 1%, 10 days, net 30 days from date of invoice

Force Majeure

Versteel shall be excused from the duty to render timely performance of any obligation hereunder if such inability to perform is caused directly or indirectly by act of God, flood, war, riot, fire, accident, explosion, strikes or labor trouble, act of government, delay or default by a subcontractor or supplier of materials or services, transportation difficulty or delay, the existence of any circumstance making performance commercially impracticable or any other cause beyond Versteel's reasonable control. Buyer's obligation to make any payment due and owing to Versteel shall not be excused for any reason whatsoever.

Oversized Shipping Fee

Orders received for items or tops greater than 94" in length will receive a \$200 + net oversized shipping fee per order. Fee not applied to orders with multi-piece tops where each section is less than 94" in length.

Warranty

Warranty

All table and seating products manufactured by Versteel are guaranteed by a Lifetime Warranty against defects in materials and workmanship from the date of purchase. Products manufactured/adapted for use in a Pavilion or Pop-Up setting are covered under a three (3) year warranty against defects in materials and workmanship from date of purchase.

Electrical items manufactured by Versteel are guaranteed against defect for a period of five (5) years from date of purchase.

Electrical items not manufactured by Versteel are covered by the manufacturers under their specified warranty.

Consumables such as gas cylinders, casters and glides are covered for a period of one (1) year. Adjustable height bases with crank and counterbalanced components, are covered under a two (2) year warranty. Versteel will not cover labor costs associated with replacing the casters or glides.

Wood veneer is warranted for a period of ten (10) years. Natural variations in grain, color or texture of wood should not be construed as defects under this warranty.

Versteel will replace or repair (at our discretion) without cost to our customers any item manufactured by Versteel found to be defective as a result of defective material or workmanship and is still owned by the original purchaser. We will not, however, repair any item which is not properly installed, abused or subject to any use other than that which was originally intended. Warranty does not cover normal wear and tear of the product, which is expected over the course of ownership. Any repairs by the customer must receive specific written authorization from Versteel before being executed on location to receive proper reimbursement for associated costs. In no event shall liability under this warranty exceed the original purchase price.

Pavilion and Pop-Up products must be covered and out of direct sunlight. Use location must be a minimum of 100 miles from saltwater

Warranty on plastic laminates, Corian®, KrystalCast® and upholstery is not covered by Versteel but is covered by laminate, Corian®, KrystalCast® and textile manufacturers under their specified warranty only. All foams, fabrics and vinyls are prone to stretch and loosen over time through normal use. This natural effect, called puddling is covered for a period of one (1) year from the date of purchase.

There are no other warranties expressed or implied.

VFRSTFFI

Care of Laminate Surfaces, T-Mold, Bumper, PVC Edges and Urethane

Clean with a mild soap solution and rinse with clean, clear water. Wipe the entire surface, moving with the pattern and follow with a clean, dry soft cloth. When a wood edge exists, follow instructions found under "Care of Wood Edges and Veneer Surfaces" for edge.

Care of Wood Edges and Veneer Surfaces

Clean all surfaces frequently with water-dampened soft cloth, moving the cloth with the grain direction. Quickly buff dry. Immediately remove any liquids that come in contact with wood surfaces using a blotting action to absorb liquid. Lift objects to move them. Never pull them across the finished surface.

For an additional safeguard, use a protective surface pad. Doing so could ensure a lasting finish by protecting your furniture from possible damage caused by pens and sharp objects.

Avoid exposing furniture to extreme heat and cold or to wide humidity variances. Avoid exposing furniture to strong sunlight. Do not use soaps, commercial cleaners or harsh solvents (nail polish remover, acetates, etc.) as they will cause finish deterioration. If using a protective glass top, place spacer pads under the glass top to allow the wood to breathe.

Care of Powder Coat and Nickel Surfaces

Clean with a mild soap solution and rinse with clean, clear water. Wipe the entire surface and follow with a clean, dry cloth to buff dry.

Care of Chrome Bases

Clean with a wet cloth or window cleaner. For scuff marks or heavy soiling, a non-abrasive automotive chrome polish can be applied as directed.

Maintenance of Mechanical Parts

Clean any lint or debris from the moving parts of the E-Z install tilt or folding base mechanisms. Do not apply lubricant. Mechanisms have been designed and tested to not require lubrication under normal conditions.

Care of Upholstered Tack Panels

For Versteel standard fabrics and vinyls, consult the back of the appropriate swatch card for cleaning codes and any specific instructions. For COM materials, consult with the individual textile manufacturer for cleaning codes and any specific instructions pertaining to your particular fabric.

Parsons

VFRSTFFI **Environmental Policy**

Objective

It is the objective of Versteel to adhere to Federal, State and local laws and codes, ordinances and regulations as may be applicable to control environmental risks, prevent harm to the public health and welfare, and to preserve our natural resources. Versteel acknowledges the necessity of commitment and hereby commits its resources of all levels of its management and all employees of the company to accomplish this objective.

Policy Statement

Each Versteel facility has the responsibility to:

Develop environmental policies which implement regulatory compliance requirements and provide management guidance and support with applicable environmental laws.

Train and motivate personnel to work in an environmentally acceptable manner and to understand and comply with government regulations within the scope of Versteel operations.

Communicate the importance of personal responsibility protection to all employees through formal training. Each employee will be aware of the environmental regulations applicable to their job functions, including limitations and functional restrictions of permits, spill control, emergency response actions, proper waste handling procedures, etc.

Communicate and continually assess relevant environmental developments on operations of the facilities and personnel.

Require sub-contractors or contractors (third parties working for, with, or on behalf of Versteel) to follow Versteel's environmental procedures while working within their facilities.

Make responsible personnel available at all times to carry out environmental procedures, especially under emergency situations.

Apply sound management practices and operating procedures.

Implement appropriate control technologies and process guidelines for preventive and corrective maintenance systems to minimize actual and potential environmental harm and exposures.

Communicate effectively with government and the public regarding serious environmental incidents should they ever occur.

Minimize the generation, emission or discharge of waste, and harmful or regulated substances and pollutants from operations to the extent most practical with laws and regulations. Ensure proper disposal of all waste.

Substitute materials or processes to allow the use of less hazardous substances where feasible.

Secure and maintain all environmental permits required for operation. Maintain up-to-date files of all environmental reporting requirements and make this information available for easy access at each operating facility.

Evaluate the causes behind any serious environmental incidents and establish procedures to avoid recurrence.

There is a sincere effort at Versteel to maintain our responsibility to the environment and to our employees. We are mindful of the effectiveness and improvements required to ensure environmentally safe conditions and to preserve our natural resources.

We pride ourselves on exceeding the standards set forth by federal, state and local codes.

Our electroplating plant consistently earns local annual environmental awards, and all of our products have met the requirements for Intertek Green Leaf VOC/VOC+ certification.





At Versteel, we feel it is our responsibility as a manufacturer to build products in a manner that promotes a safe and healthy environment for everyone. We maintain detailed information regarding the environmental impact of all Versteel products. If you have questions regarding our environmental policy or would like more information, please contact Versteel Customer Service at 800.876.2120.

Configuration Guidelines

Often we receive requests to assemble room configurations that one would assume are very easy. But without the proper input, it is not so simple. Below are some common questions that will help to define your needs as well as enable us to help you specify your tables.

Define Your Space

Start by asking yourself what you really want to accomplish in your room.

How will your room be used? Will you need breakout groups, is it a classroom with rows, or a boardroom? Do you need a T-shape, U-shape, or hollow square table group? Are there any special modifications that are specific to your application?

Besides the size of your room, here are some other items that you should take into consideration:

- ¬ instructor or speaker area
- ¬ wall with boards and/or audiovisual equipment
- ¬ door and window locations
- ¬ anything else which may interfere (columns, steps, ramps, HVAC, etc,)

Define Your Needs

Your table considerations should begin by thinking about the need for the following items:

- ¬ modesty panels
- ¬ linking
- ¬ power and data
- ¬ wire management and grommets
- ¬ keyboard trays
- ¬ fixed, folding or tilt bases
- ¬ special needs (alternate or adjustable height)

Your seating considerations should begin by thinking about the need for the following items:

- ¬ assume a 30" width per person
- ¬ mobility (casters)
- ¬ stacking or storage issues
- ¬ usage and wear (upholstery or wood)
- ¬ adjustable height
- function (task specific or multiple)

The following are neral guidelines only. Always refer to local codes for restrictions and requirements

Common Room Layout Guidelines

By using the guidelines below and the information that you supply (from answering the previous questions), Versteel can help you specify the tables and seating you need to make your space function at its maximum potential.

Between Rows Allow Four Feet (4')

If rows are used, four feet (4') between rows is considered adequate in order to provide space for

Instructor Allowance of Eight - Ten Feet (8'-10')

A minimum of eight to ten feet (8' -10') should be allowed for the instructor's space, from the wall to the approach side of the first table row.

Back Wall Allowance of Seven Feet (7')

Space consideration for the back wall is necessary. A minimum of seven feet (7') from the back wall to the user's side of the last table is suggested.


Side Wall Allowance of Four Feet (4')

A minimum of four feet (4') from a side wall to the edge of a table should be incorporated into your configuration. Increase the distance for larger rooms.

Aisle Allowance of Four Feet (4')

If an aisle is needed, allow a minimum of four feet (4'). This dimension should increase with your room size.

The drawing below illustrates the guidelines above.

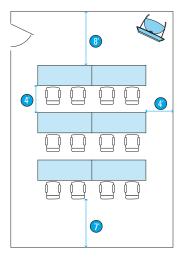

Space Planning **VERSTEEL**

The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Reference information here originally appeared in Architectural Graphic Standards, published by John Wiley and Sons: and in US Government publications for compliance with the ADA (Americans with Disabilities Act).

Also, be sure to check US Government publications for compliance with the ADA (Americans with Disabilities Act).

Common Seating Dimension Requirements

General spacing of thirty inches (30") of lateral space per chair at a table is standard. A minimum of twentyfour inches (24") may work, but will depend upon your chair style and table dimensions. Allow a minimum of thirty to thirty-six inches (30"-36") for wheelchair space at a table.

Most wheelchairs are designed to fit beneath a standard table with a twenty-nine inch (29") table top height. However, some wheelchairs require tables with tops at thirty-two inches (32") in height. Allow an additional twelve to eighteen inches (12"-18") in aisles where wheelchairs may be situated back to back.

A rule of thumb for cafeteria style seating is to allow a minimum of twelve square feet (12 ft²) for each seat.

- A Wheelchair, Double Passage
- **B** Wheelchair, Single Passage
- **C** Wheelchair, Turning Diameter






Table Seating Capacities by Size and Shape

Rectangular Tables

SIZE	CHAIRS	WHEELCHAIRS
24" x 48"	4	Not Recommended
30" x 48"	4	2
30" x 60"	4-6	4
36" x 72"	4-6	4-6
42" x 96"	6-8	8

Square Tables


SIZE	CHAIRS	WHEELCHAIRS
30" x 30"	2	Not Recommended
36" x 36"	2-4	Not Recommended
42" x 42"	4	2 (tight)
48" x 48"	4-8	2
54" x 54"	4-8	4
60" x 60"	4-8	4


NOTE

A round table with a column base is often preferred for wheelchair disabled

Round Tables

SIZE	CHAIRS	WHEELCHAIRS
30" DIAMETER	2	Not Recommended
36" DIAMETER	2-4	Not Recommended
42" DIAMETER	4-5	Not Recommended
48" DIAMETER	5-6	2
54" DIAMETER	6-7	4






The following are neral guidelines only. Always refer to local codes for restrictions and requirements.

Also, be sure to check US Government publications for compliance with the ADA (Americans with Disabilities Act).

Minimum Table and Chair Space Allotments

Below

- A 36" minimum, 44" preferred
 - 54" minimum handicapped, 60" preferred
- **B** 24" minimum
- C 24" minimum per chair, 30" preferred
- D 14" minimum




Dining Room Plan

Below

- A 6" minimum (with no passage)
- **B** 2'6" to 3' minimum (for passage)
- C 1'6" minimum (for limited passage)
- **D** 3' minimum

If using square tables and seating, there should be a minimum of sixty-six inches (66") between tables. This allows for a thirty inch (30") aisle and two (2) chairs. Diagonal seating requires a thirty-six inch (36") minimum between table corners.

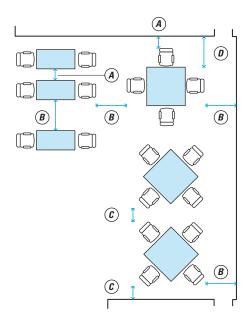


Sample Space Use

Below

- A Conference Room
- **B** Small Team Planning
- C Large Team Planning
- **D** Round Table Discussion
- E Individual Work Areas
- **F** Breakout Areas

Since every space has its own unique size and function, it is important that you consider the aforementioned guidelines when planning your space. Be sure to allow adequate space for aisles and plan your rooms around walls and other permanent fixtures such as doors or windows. Anticipate the type of activity that will be going on and plan enough space at the table for easy movement of personnel when seated.

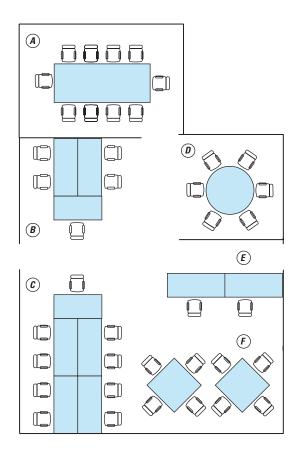

Versteel Parsons Table VERSTEEL

Laminate, Standard Core Construction

The standard top construction consists of 45-50 lb. particleboard, surfaced with a high pressure laminate on all sides of the top and legs. Laminate panels are 2" thick. Table is predrilled for field installation.

Integrated under surface wire management channel consists of two (2) 1 $\frac{1}{2}$ " thick panels with a powder coated metal cover plate. For a Parsons Table specified in Wilsonart D354-60 Designer White laminate, the under surface wire management channel cover plate will be Snow (SN) powder coat. When table is specified in any other laminate, cover plate will be Alloy (AY) powder coat.

Table Height

Parsons table is offered in 29", 36", and 42" heights.

Clides

Parsons table is standard with nylon adjustable glides.

Laminates

Versteel's standard offering of laminates includes over 900 laminates from Wilsonart, Formica, Nevamar and Pionito

Laminate manufacturers change standard offerings frequently, and it is possible that a standard product can become unavailable. Versteel cannot be responsible for any inconvenience this may cause.

Options

Alternate Table Height

Parsons table is offered in 29", 36", and 42" heights.

Alternate heights are available, contact Versteel Customer Service for quote.

Wire Management Integrated Wire Management - \$163/panel

Specify code **BWP** (One Panel Wire Management), add \$163 list per table.

Specify code **BWP2** (Two Panel Wire Management), add \$325 list per table.

The core of the end panel contains a 2" concealed channel to allow for integrated wire management with access at the bottom of the end panel through a 2 $\frac{1}{4}$ " round grommet.

Power Bay - \$1164 / unit

Specify code EPB_ (Power Bay - Location_), add \$1164.00 list per Power Bay for first unit per table and \$1164.00 for each additional unit.

For clear anodized aluminum finish, add \$126 list per unit

The flush mount Power Bay electrical unit(s) is factory installed in the specified location. Choose any standard powder coat, or Clear Anodized Aluminum, for bezel and door.

SPECIFICATIONS

- o One 10' cord, one 15 amp circuit, standard grounded plug
- Surge protection
- · Four electrical outlets per unit
- o Data plate with 9 slots

NOTE USE POWER BAY DATA PLATE GUIDELINES TO SPECIFY DATA JACKS



1 Power Bay - Provide Location Print \$1164 / table

Specify code EPB1 (1 Power Bay - Provide Location Print), add \$1164.00 list per table

One flush mount Power Bay electrical unit is factory installed in the top location indicated by specifier's print.

? ?

2 Power Bays - Provide Location Print \$2328 / table

Specify code EPB2 (2 Power Bays - Provide Location Print), add \$2328.00 list per table

Two flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.

? ? ?

3 Power Bays - Provide Location Print \$3492 / table

Specify code EPB3 (3 Power Bays - Provide Location Print), add \$3492.00 list per table

Three flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.

? ? ? ?

4 Power Bays - Provide Location Print \$4656 / table

Specify code EPB4 (4 Power Bays - Provide Location Print), add \$4656.00 list per table

Four flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.

Power Bay Data Plate Guidelines

The Power Bay Data Plate has (9) available slots for data jacks. Listed below are specification codes, number of slots each jack will occupy, and pricing.

Jack Type	Specify Code	Number of Slots	List Price per Jack Type
Data	DA	1	\$40
Voice	V0	1	\$16
Mini Stereo	MS	1	\$19
VGA	VG	2	\$28
HDMI	HD	2	\$93
USB	US	2	\$42
Data Coupler	DD	1	\$128
Voice Coupler	VV	1	\$37

Power & Data Options VERSTEEL

Eclipse

Model

Soft touch finish brings a hint of play to any fashionable work environment. Three port options. Mounts in surface.

Description

SPECIFICATIONS

o Hole mount is 4.5" diameter



ECL-IP3X ECL-IP2U	Three (3) power Two (2) power and one (1) dual port USB charger	\$392 list \$462 list
Unit Color		
STB	Soft Touch Black Plastic	n/c
STG	Soft Touch Green Plastic	n/c
ST0	Soft Touch Orange Plastic	n/c
STW	Soft Touch White Plastic	n/c
Cord Length		
72	72" cord length, black	n/c

Model Example: ECL-IP2U-STB-72

120" cord length, black

Hemisphere

120

Soft touch finish brings a hint of play to any fashionable work environment. Three port options. Mounts in surface.

Description

SPECIFICATIONS

Model

· Hole mount is 3" diameter



\$ 18 list

HEM-IP3X HEM-IP2U	Three (3) power Two (2) power and one (1) dual port	\$282 list \$350 list
	USB charger	
Unit Color		
STB	Soft Touch Black Plastic	n/c
STG	Soft Touch Green Plastic	n/c
ST0	Soft Touch Orange Plastic	n/c
STW	Soft Touch White Plastic	n/c
Cord Length		

Model Example: HEM-IP2U-STB-72

72" cord length, black

120" cord length, black

Mini-Tap

72

120

Mini-Tap provides 2 outlets that can be mounted, with key slots, so as to put power near the edge of the worksurface. Mini-Tap is black.



n/c

\$ 18 list

n/c \$ 18 list

SPECIFICATIONS

72

120

- Two (2) Simplexes
- o Available with spill-proof Simplexes

Model	Description	
MTP-IP2X	Two (2) power	\$133 list
MTP-IP2U	One (1) power and one (1) dual port USB charger	\$343 list
Cord Lenath		

Node Flush n

Flush mount design complements a wide range of aesthetics. Plated or powder coat finishes bely a robust, die-cast construction.



Model	Description	1
NOD-IP2X	Two (2) power	\$252 list
NOD-IP2U	One (1) power and one (1) dual port USB charger	\$347 list
NOD-IP20	One (1) power and one (1) open data port	\$238 list
Unit Color (A	Additional finishes available upon request	t)
DBP	Dark Bronze Plated	\$122 list
MPC	Midnight Powder Coat	n/c
PPC	Parchment Powder Coat	n/c
SNP	Satin Nickel Plated	\$122 list
SPC	Silver Powder Coat	n/c
Cord Length		
72	72" cord length, black	n/c

Data Option (Only available with NOD-IP20)

120" cord length, black

DA	Cat6 RJ45 data jack w/ 10' patch cord	\$ 86 list
HD	HDMI jack	\$ 98 list
US	USB passive jack	\$ 63 list
V0	Cat3 RJ11 voice jack w/ 7' patch cord	\$ 40 list

Model Example: NOD-IP2U-SPC-72

Salt or Pepper

120

Individual dual USB charger or power outlet for easy, quick access applications.

SPECIFICATIONS

- Salt or Pepper hole mount is 1 ¾" diameter
- Smooth seamless designSpill-proof power simplex
- o 72" power cord, black



\$ 18 list

Model	Description	
SLT1	One (1) dual port USB A charger	\$185 list
SLT3	One (1) single port USB C 60 watt	\$390 list
	charger	
SLT4	One (1) 10 watt USB A + 10 watt	\$234 list
	USB C charger	
PPR	One (1) power outlet w/72" black cord	\$102 list

Unit Color (Additional finishes available upon request)

Berry
Black
Blue
Dusk
Fog
Honey
Navy
Orange
Peacock
Рорру
Spring Green
Storm
White

Model Example: SLT-BLKP

72" cord length, black

120" cord length, black

Axil Z IP (Individually Powered)

Constructed out of anodized aluminum with a painted, steel faceplate, Axil Z is a robust, scalable and customizable power/data solution.



SPECIFICATIONS

- o Mounts flat, sitting just above worksurface
- o Requires cutout in worksurface
- o Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops ¾" to 1 ¾" thick

Model	Description	
AXZ-IP-2-0	Two (2) power and no data	\$373 list
AXZ-IP-2-2	Two (2) power and two (2) open ports	\$382 list
AXZ-IP-2-4	Two (2) power and four (4) open ports	\$390 list
AXZ-IP-2-6	Two (2) power and six (6) open ports	\$399 list
AXZ-IP-3-1	Three (3) power and one (1) open port	\$396 list
AXZ-IP-3-3	Three (3) power and three (3) open ports	\$403 list
AXZ-IP-3-5	Three (3) power and five (5) open ports	\$412 list
AXZ-IP-4-0	Four (4) power and no open ports	\$491 list
AXZ-IP-4-2	Four (4) power and two (2) open ports	\$499 list
AXZ-IP-4-4	Four (4) power and four (4) open ports	\$505 list
Unit Color		
MWCA	Matte White Faceplate, Clear Al Trim	n/c
MBCA	Matte Black Faceplate, Clear Al Trim	n/c
MSCA	Matte Storm Faceplate, Clear Al Trim	n/c
MFCA	Matte Fog Faceplate, Clear Al Trim	n/c
GWCA GBCA	Gloss White Faceplate, Clear Al Trim Gloss Black Faceplate, Clear Al Trim	n/c n/c
SVCA	Silver Faceplate, Clear Al Trim	n/c
MWBA	Matte White Faceplate, Black Trim	\$128 list
MBBA	Matte Black Faceplate, Black Trim	\$128 list
MSBA	Matte Storm Faceplate, Black Trim	\$128 list
MFBA	Matte Fog Faceplate, Black Trim	\$128 list
GWBA	Gloss White Faceplate, Black Trim	\$128 list
GBBA	Gloss Black Faceplate, Black Trim	\$128 list
SVBA	Silver Faceplate, Black Trim	\$128 list
Cord Length		
72	72" cord length, black	n/c
120	120" cord length, black	\$ 18 list
USB Chargii	ng Options (Total cannot exceed 80 watts	s)
UA	One (1) 20 watt dual port USB A	\$136 list
UA2	charging module (requires 1 open port) Two (2) 20 watt dual port USB A	\$268 list
UAZ	charging modules (requires 2 open ports)	φ200 IISt
UAC	One (1) 10 watt USB A + 10 watt USB C	\$136 list
	charging module (requires 1 open port)	
UAC2	Two (2) 10 watt USB A + 10 watt USB C	\$272 list
UC	charging modules (requires 2 open ports) One (1) 60 watt USB C charging module	\$290 list
00	(requires 2 open ports)	ψ230 1131
Data Option	(Each data jack requires 1 open port)	
DA	Cat6 RJ45 data jack w/ 10' patch cord	\$ 86 list
HD	HDMI jack	\$ 98 list
MS	3.5mm mini-stereo audio jack	\$ 28 list
US	USB passive jack	\$ 63 list
VG	VGA jack, 15 pin	\$122 list
V0	Cat3 RJ11 voice jack w/ 7' patch cord	\$ 40 list

Model Example: AXZ-IP-4-2-GWCA-72-DA-DA

Axil Z SL2 (Soft-Wired, Linked)

Constructed out of anodized aluminum with a painted, steel faceplate, Axil Z is a robust, scalable and customizable power/data solution.



SPECIFICATIONS

- o Mounts flat, sitting just above worksurface
- · Requires cutout in worksurface
- $\circ\,$ Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops ¾" to 1 ¾" thick

 Fits in tops 	3/4" to 1 3/4" thick			
 Maximum of 8 units in sequence 				
• Interlink iQ 2.0 (not compatible with units sold prior to 2/1/19)				
	, and the second			
Model	Description			
AXZ-SL2-2-0	Two (2) power and no data	\$384 list		
AXZ-SL2-2-0	Two (2) power and two (2) open ports	\$394 list		
AXZ-SL2-2-4	Two (2) power and four (4) open ports	\$402 list		
AXZ-SL2-2-6	Two (2) power and six (6) open ports	\$410 list		
AXZ-SL2-3-1	Three (3) power and one (1) open port	\$407 list		
AXZ-SL2-3-3	Three (3) power and three (3) open ports	\$416 list		
AXZ-SL2-3-5	Three (3) power and five (5) open ports	\$424 list		
NOTE SOFT-WIR	RED. LINKED UNITS CAN HAVE A MAXIMUM OF 3 PO	NER		
OUTLETS AND 1 E	DUAL PORT USB CHARGING MODULE PER UNIT.			
Unit Color				
MWCA	Matte White Faceplate, Clear Al Trim	n/c		
MBCA	Matte Black Faceplate, Clear Al Trim	n/c		
MSCA	Matte Storm Faceplate, Clear Al Trim	n/c		
MFCA	Matte Fog Faceplate, Clear Al Trim	n/c		
GWCA	Gloss White Faceplate, Clear Al Trim	n/c		
GBCA	•			
	Gloss Black Faceplate, Clear Al Trim	n/c		
SVCA	Silver Faceplate, Clear Al Trim	n/c		
MWBA	Matte White Faceplate, Black Trim	\$128 list		
MBBA	Matte Black Faceplate, Black Trim	\$128 list		
MSBA	Matte Storm Faceplate, Black Trim	\$128 list		
MFBA	Matte Fog Faceplate, Black Trim	\$128 list		
GWBA	Gloss White Faceplate, Black Trim	\$128 list		
GBBA	Gloss Black Faceplate, Black Trim	\$128 list		
SVBA	Silver Faceplate, Black Trim	\$128 list		
Power Infee	d			
BPS2-72	72" cord length, black	\$509 list		
BPS2-120	120" cord length, black	\$526 list		
BPS2-180	180" cord length, black	\$556 list		
	•	,		
NOTE 8 UNITS P.	ER 1 BPS.			
Jumper				
BEJ2	Standard jumper included with tables	\$134 list		
DLJZ	up to and including 60". BEJ2 jumper	φ134 115ι		
	required for tables greater than 60".			
HCD Charrie	Ontions (Total connet aveced 20	.1		
-	ng Options (Total cannot exceed 80 watts			
UA	One (1) 20 watt dual port USB A	\$136 list		
1140	charging module (requires 1 open port)	4000 II		
UA2	Two (2) 20 watt dual port USB A	\$268 list		
LIAC	charging modules (requires 2 open ports)	Φ100 I:-+		

One (1) 10 watt USB A + 10 watt USB C \$136 list charging module (requires 1 open port)

Two (2) 10 watt USB A + 10 watt USB C \$272 list charging modules (requires 2 open ports)

One (1) 60 watt USB C charging module \$290 list

Cat6 RJ45 data jack w/ 10' patch cord \$ 86 list

\$ 98 list

\$ 28 list

\$ 63 list

\$122 list

\$ 40 list

Model Example: AXZ-SL2-2-0-GWCA

USB passive jack

VGA jack, 15 pin

HDMI jack

(requires 2 open ports) Data Option (Each data jack requires 1 open port)

3.5mm mini-stereo audio jack

Cat3 RJ11 voice jack w/ 7' patch cord

UAC

UAC2

UC

DA HD

MS

US

VG

V0

Ellora IP (Individually Powered)

Anodized aluminum construction and smart design keep cable clutter out of sight.



SPECIFICATIONS

- $\circ\,$ Includes a voice/data adapter kit to accept couplers and jacks when required
- Requires cutout in worksurface

Model	Description	
ELL-IP-2-0	Two (2) power and no data	\$585 list
ELL-IP-2-2	Two (2) power and two (2) open ports	\$597 list
ELL-IP-2-4	Two (2) power and four (4) open ports	\$606 list
ELL-IP-2-6	Two (2) power and six (6) open ports	\$617 list
ELL-IP-3-1	Three (3) power and one (1) open port	\$612 list
ELL-IP-3-3	Three (3) power and three (3) open ports	\$623 list
ELL-IP-3-5	Three (3) power and five (5) open ports	\$632 list
ELL-IP-4-0	Four (4) power and no open ports	\$761 list
ELL-IP-4-2	Four (4) power and two (2) open ports	\$771 list
ELL-IP-4-4	Four (4) power and four (4) open ports	\$782 list
Unit Color		
SAAWT	Silver Anodized Aluminum with White Trim	n/c
SAABT	Silver Anodized Aluminum with Black Trim	n/c
BAABT	Black Anodized Aluminum with	\$184 list
DAADI	Black Trim	φ104 H3t
Cord Length		
oora Longar		
72	72" cord length, black	n/c
•		n/c \$ 18 list
72 120	72" cord length, black	\$ 18 list
72 120	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A	\$ 18 list
72 120 USB Chargi	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A	\$ 18 list
72 120 USB Chargi UA	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C	\$ 18 list s) \$136 list
72 120 USB Chargin UA UA2 UAC	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port)	\$ 18 list \$) \$136 list \$268 list \$136 list
72 120 USB Chargin UA UA2	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C	\$ 18 list (s) \$136 list \$268 list
72 120 USB Chargin UA UA2 UAC UAC2	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports)	\$ 18 list s) \$136 list \$268 list \$136 list \$272 list
72 120 USB Chargin UA UA2 UAC	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C	\$ 18 list \$) \$136 list \$268 list \$136 list
72 120 USB Chargin UA UA2 UAC UAC2 UC	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 wats: One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module	\$ 18 list s) \$136 list \$268 list \$136 list \$272 list
72 120 USB Chargin UA UA2 UAC UAC2 UC	72" cord length, black 120" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports)	\$ 18 list s) \$136 list \$268 list \$136 list \$272 list
T2 120 USB Chargin UA UA2 UAC UAC2 UC	72" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port)	\$ 18 list \$) \$136 list \$268 list \$136 list \$272 list \$290 list
72 120 USB Chargin UA UA2 UAC UAC2 UC Data Option	72" cord length, black 120" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord	\$ 18 list \$) \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list
72 120 USB Chargin UA UA2 UAC UAC2 UC Data Option DA HD MS US	72" cord length, black 120" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack USB passive jack	\$ 18 list \$) \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list \$ 63 list
72 120 USB Chargin UA UA2 UAC UAC2 UC Data Option DA HD MS	72" cord length, black 120" cord length, black 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack	\$ 18 list \$) \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list

Model Example: ELL-IP-4-4-SAABT-72-U1-DA-DA-HD

Ellora SL2 (Soft-Wired, Linked)

Smart design keeps cable clutter out of sight by allowing use while the lid is shut.

SPECIFICATIONS

- o Includes a voice/data adapter kit to accept couplers and jacks when required
- $\circ~$ Fits in tops $3\!\!/\!_{4}$ to 1 $3\!\!/\!_{4}$ thick
- · Requires cutout in worksurface
- $\,{}^{\circ}\,$ Maximum of 8 units in sequence
- o Interlink iQ 2.0 (not compatible with units sold prior to 2/1/19)

2/1/19)		
Model	Description	
ELL-SL2-2-0 ELL-SL2-2-2 ELL-SL2-2-4	Two (2) power and no data Two (2) power and two (2) open ports Two (2) power and four (4) open ports	\$597 li \$612 li \$638 li
ELL-SL2-2-6	Two (2) power and six (6) open ports	\$664 li
ELL-SL2-3-1 ELL-SL2-3-3	Three (3) power and one (1) open port Three (3) power and three (3) open ports	\$608 li \$633 li
ELL-SL2-3-5	Three (3) power and five (5) open ports	\$661 li
	RED, LINKED UNITS CAN HAVE A MAXIMUM OF 3 PO DUAL PORT USB CHARGING MODULE PER UNIT.	WER
Unit Color		
SAAWT	Silver Anodized Aluminum with White Trim	n/c
SAABT	Silver Anodized Aluminum with Black Trim	n/c
BAABT	Black Anodized Aluminum with Black Trim	\$184 li
Power Infe	ed	
BPS2-72	72" cord length, black	\$509 I
BPS2-120	120" cord length, black	
BPS2-180	180" cord length, black	
BPS2-180 NOTE 8 UNITS	180" cord length, black	
BPS2-180 NOTE 8 UNITS I	180" cord length, black PER 1 BPS.	\$526 li
BPS2-180 NOTE 8 UNITS	180" cord length, black PER 1 BPS. Standard jumper included with tables	\$556 li
BPS2-180 NOTE 8 UNITS I	180" cord length, black PER 1 BPS.	\$556 li
BPS2-180 NOTE BUNITS Jumper BEJ2	180" cord length, black PER 1 BPS. Standard jumper included with tables up to and including 60". BEJ2 jumper	\$556 li \$134 li
BPS2-180 NOTE BUNITS Jumper BEJ2	180" cord length, black PER 1 BPS. Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A	\$556 I \$134 I
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A	\$556 I \$134 I \$) \$136 I
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port)	\$556 \$134 \$134 \$136 \$268
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C	\$556 li \$134 li
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC	180" cord length, black PER 1 BPS. Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". ng Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C	\$556 Ii \$134 Ii \$136 Ii \$268 Ii \$272 Ii
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". In a poptions (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module	\$556 \$134 \$134 \$136 \$272
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". Ing Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports)	\$556 \$134 \$134 \$136 \$268 \$136 \$272 \$290
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC Data Option	180" cord length, black Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". Ing Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) It (Each data jack requires 1 open port)	\$556 \$134 \$134 \$134 \$136 \$268 \$136 \$272 \$290 \$86
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC Data Option DA	180" cord length, black PER 1 BPS. Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". Ing Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord	\$556 I I I I I I I I I I I I I I I I I I
BPS2-180 NOTE 8 UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC Data Option DA HD	Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". Ing Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging modules (requires 2 open ports) (Each data jack requires 1 open port) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack	\$556 II \$134 II \$134 II \$136 II \$268 II \$272 II \$290 II \$86 II \$98 II \$28 II \$68 II
BPS2-180 NOTE & UNITS Jumper BEJ2 USB Chargi UA UA2 UAC UAC2 UC Data Option DA HD MS	Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". Ing Options (Total cannot exceed 80 watts one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) one (1) 60 watt USB C charging module (requires 1 open port) Cat6 RJ45 data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack	\$556 Ii \$134 Ii \$136 Ii \$268 Ii \$136 Ii

Model Example: ELL-SL2-2-0-SAABT

n/c

\$184 list

Mho IP (Individually Powered)

Retractable and durably constructed. Highly functional with a fluid, one touch door that remains open during use.



SPECIFICATIONS

- · Fluid, one touch accessibility
- o Includes a voice/data adapter kit to accept couplers and jacks when required

Model	Description	
MH0-IP-2-0	Two (2) power and no data	\$501 list
MH0-IP-2-2	Two (2) power and two (2) open ports	\$510 list
MH0-IP-2-4	Two (2) power and four (4) open ports	\$522 list
MHO-IP-2-6	Two (2) power and six (6) open ports	\$531 list
MHO-IP-3-1	Three (3) power and one (1) open port	\$585 list
MH0-IP-3-3	Three (3) power and three (3) open ports	\$598 list
MH0-IP-3-5	Three (3) power and five (5) open ports	\$608 list
MH0-IP-4-0	Four (4) power and no open ports	\$653 list
MH0-IP-4-2	Four (4) power and two (2) open ports	\$662 list
MHO-IP-4-4	Four (4) power and four (4) open ports	\$672 list
Unit Color		
SAABT	Silver Anodized Aluminum with	n/c
	Black Trim	
SAAWT	Silver Anodized Aluminum with White Trim	n/c
SAA	Silver Anodized Aluminum	n/c
BAA	Black Anodized Aluminum	\$184 list
Cord Length		
72	72" cord length, black	n/c
120		
120	120" cord length, black	\$ 18 list
	120" cord length, black ng Options (Total cannot exceed 80 watts	
	ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A	
USB Chargi UA	ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port)	\$136 list
USB Chargi	ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A	s)
USB Chargi UA	ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port)	\$136 list
USB Chargi UA UA2	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port)	\$136 list \$268 list
USB Chargi UA UA2	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C	\$136 list \$268 list
USB Chargi UA UA2 UAC UAC2	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging module (requires 2 open ports)	\$136 list \$268 list \$136 list \$136 list \$272 list
USB Chargi UA UA2 UAC	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C	\$136 list \$268 list \$136 list
USB Chargi UA UA2 UAC UAC2 UC	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports)	\$136 list \$268 list \$136 list \$136 list \$272 list
USB Chargi UA UA2 UAC UAC2 UC Data Option	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports)	\$136 list \$268 list \$136 list \$136 list \$272 list \$290 list
USB Chargi UA UA2 UAC UAC2 UC Data Option	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging modules (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord	\$136 list \$268 list \$136 list \$136 list \$272 list \$290 list \$86 list
USB Chargi UA UA2 UAC UAC2 UC Data Option DA HD	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack	\$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list
USB Chargi UA UA2 UAC UAC2 UC Data Option DA HD MS	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack	\$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list
USB Chargi UA UA2 UAC UAC2 UC Data Option DA HD	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging module (requires 2 open ports) One (1) 10 watt USB C charging module (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack USB passive jack	\$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list
USB Chargi UA UA2 UAC2 UC Data Option DA HD MS US	one (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack	\$136 list \$268 list \$136 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list \$ 63 list

Model Example: MHO-IP-3-3-SAABT-72-U1-DA-DA

Mho SL2 (Soft-Wired, Linked)

Retractable and durably constructed. Highly functional with a fluid, one touch door that remains open during use.



SPECIFICATIONS

- o Fluid, one touch accessibility
- o Includes a voice/data adapter kit to accept couplers and jacks when required
- Maximum of 8 units in sequence
- o Interlink iQ 2.0 (not compatible with units sold prior to

2/1/19)		
Model	Description	
MH0-SL2-2-0	Two (2) power and no data	\$520 list
MH0-SL2-2-2	Two (2) power and two (2) open ports	\$529 list
MH0-SL2-2-4	Two (2) power and four (4) open ports	\$542 list
MH0-SL2-2-6	Two (2) power and six (6) open ports	\$550 list
MH0-SL2-3-1	Three (3) power and one (1) open port	\$608 list
MH0-SL2-3-3	Three (3) power and three (3) open ports	\$618 list
MH0-SL2-3-5	Three (3) power and five (5) open ports	\$629 list
	ED, LINKED UNITS CAN HAVE A MAXIMUM OF 3 POW UAL PORT USB CHARGING MODULE PER UNIT.	/ER
Unit Color		
SAABT	Silver Anodized Aluminum with Black Trim	n/c
SAAWT	Silver Anodized Aluminum with White Trim	n/c

Power Infeed

SAA

BAA

BPS2-72	72" cord length, black	\$509 list
BPS2-120	120" cord length, black	\$526 list
BPS2-180	180" cord length, black	\$556 list

Silver Anodized Aluminum

Black Anodized Aluminum

NOTE 8 UNITS PER 1 BPS.

Jumper

•		
BEJ2	Standard jumper included with tables	\$134 list
	up to and including 60". BEJ2 jumper	
	required for tables greater than 60"	

USB Charging Options (Total cannot exceed 80 watts)

UA	One (1) 20 watt dual port USB A	\$136 list
	charging module (requires 1 open port)	
UA2	Two (2) 20 watt dual port USB A	\$268 list
	charging modules (requires 2 open ports)	
UAC	One (1) 10 watt USB A + 10 watt USB C	\$136 list
	charging module (requires 1 open port)	
UAC2	Two (2) 10 watt USB A + 10 watt USB C	\$272 list
	charging modules (requires 2 open ports)	
UC	One (1) 60 watt USB C charging module	\$290 list
	(requires 2 open ports)	

Data Option (Each data jack requires 1 open port)

DA	Cat6 RJ45 data jack w/ 10' patch cord	\$ 86 list
HD	HDMI jack	\$ 98 list
MS	3.5mm mini-stereo audio jack	\$ 28 list
US	USB passive jack	\$ 63 list
VG	VGA jack, 15 pin	\$122 list
VO	Cat3 RJ11 voice jack w/ 7' patch cord	\$ 40 list

Model Example: MHO-SL2-2-0-SAAWT

Power & Data Options **VERSTEEL**

> All Ashley soft-wired linking systems require an HNPU power supply unit per each sequence. Specify code HNPU, \$403.00 list each.

- o 120" cord length
- 15 amp circuit
- o standard grounded plug
- surge protection



Ashley Duo Under

Sharp, clean design features smooth receptacle faces, sleek satin metal trim, and optional ports for extensive power and data delivery.



Model	Description	
ADU-IP	Two (2) power, one (1) dual port USB charging, individually powered, soft-wired	\$425 list
ADU-HW	Two (2) power, one (1) dual port USB charging, individually powered, hard-wired	\$483 list
ADU-SL	Two (2) power, one (1) dual port USB charging, soft-wired linking (includes jumper)	\$618 list
Unit Color		
BB	Black with Black Mounting Bracket	n/c
WS	White with Silver Mounting Bracket	n/c
WW	White with White Mounting Bracket	n/c
Cord Length	(Individually powered units only)	
72	72" cord length	n/c
120	120" cord length	\$ 18 list

Ashley Trio Under

Model

Sharp, clean design features smooth receptacle faces, sleek satin metal trim, and optional ports for extensive power and data delivery.

Description



ATU-IP	Three (3) power, one (1) dual port USB charging, individually powered, soft-wired	\$503 list		
ATU-HW	Three (3) power, one (1) dual port USB charging, individually powered, hard-wired	\$542 list		
ATU-SL	Three (3) power, one (1) dual port USB charging, soft-wired linking (includes jumper)	\$618 list		
Unit Color				
BB	Black with Black Mounting Bracket	n/c		
WS	White with Silver Mounting Bracket	n/c		
WW	White with White Mounting Bracket	n/c		
Cord Length (Individually powered units only)				
72	72" cord length	n/c		
	12 coru icrigari	11/0		

Questions?

1.800.876.2120

Power & Data Options
Please reference the Parsons Table Power & Data section or
the Power & Data Price List

Wire Management Options	Code	P	rice
One Panel Wire Management	BWP	\$	163
Two Panel Wire Management	RWP2	\$	325

29" Height	Description	Model #	Product Wt	Price	Parsons Ta
Parsons	18 x 72	PR1 1872H29	193	3753	2 2 2 2
	18 x 96	PR1 1896H29	240	4356	
	18 x 120	PR1 18120H29	288	5302	
	24 x 72	PR1 2472H29	233	4330	
	24 x 96	PR1 2496H29	288	5038	
	24 x 120	PR1 24120H29	343	6092	
•	30 x 72	PR1 3072H29	274	4904	
	30 x 96	PR1 3096H29	336	5719	
	30 x 120	PR1 30120H29	399	6877	
	36 x 72	PR1 3672H29	315	5683	
	36 x 96	PR1 3696H29	385	6950	
	36 x 120	PR1 36120H29	455	8009	
	42 x 72	PR1 4272H29	355	6259	
	42 x 96	PR1 4296H29	433	7629	
	42 x 120	PR1 42120H29	510	8797	
					\downarrow

To Order, Specify...

- Model Number
- 2 Laminate Code
- 3 Additional Options

VERSTEEL

Questions? 1.800.876.2120

Power & Data Options
Please reference the Parsons Table Power & Data section or
the Power & Data Price List

Wire Management Options	Code	P	rice
One Panel Wire Management	BWP	\$	163
Two Panel Wire Management	RWP2	¢	325

18 x 72 PF	odel# Product Wt Pr	ice Parsons Table
	R1 1872H36 206 41	43
18 x 96 PF	R1 1896H36 253 48	314
18 x 120 PF	R1 18120H36 301 54	187
24 x 72 PF	R1 2472H36 251 47	781
24 x 96 PF	R1 2496H36 306 55	559
24 x 120 PF	R1 24120H36 361 63	338
30 x 72 PF	R1 3072H36 296 54	118
30 x 96 PF	R1 3096H36 358 63	303
30 x 120 PF	R1 30120H36 421 71	89
36 x 72 PF	R1 3672H36 341 60	054
		319
		982
		594
42 x 96 PF	R1 4296H36 463 80	063
		232

Questions?

1.800.876.2120

Power & Data Options
Please reference the Parsons Table Power & Data section or
the Power & Data Price List

V	Vire Management Options	Code	P	rice
0	ne Panel Wire Management	BWP	\$	163
T	wo Panel Wire Management	RWP2	\$	325

42" Height	Description	Model #	Product Wt	Price	Parsons Table
Parsons	18 x 72	PR1 1872H42	217	4301	
	18 x 96	PR1 1896H42	265	4974	
	18 x 120	PR1 18120H42	312	5648	
	24 x 72	PR1 2472H42	266	4993	
	24 x 96	PR1 2496H42	321	5773	
	24 x 120	PR1 24120H42	376	6550	
	30 x 72	PR1 3072H42	315	5683	
	30 x 96	PR1 3096H42	377	6568	
	30 x 120	PR1 30120H42	440	7452	
	36 x 72	PR1 3672H42	363	6374	
	36 x 96	PR1 3696H42	433	7639	
	36 x 120	PR1 36120H42	503	8699	
	42 x 72	PR1 4272H42	412	7064	
	42 x 96	PR1 4296H42	490	8435	
	42 x 120	PR1 42120H42	567	9603	
					\bigvee

To Order, Specify...

- Model Number
- 2 Laminate Code
- 3 Additional Options

Questions?

VERSTEEL

1.800.876.2120

Power & Data Options
Please reference the Parsons Table Power & Data section or
the Power & Data Price List

Wire Management Options	Code	P	rice
One Panel Wire Management	BWP	\$	163
Two Panel Wire Management	RWP2	\$	325

Style	Description	Model #	Product Wt	Price	Parsons Table
Parsons ADA	30 x 36	PR1 A3036H29		3684	
	36 x 36	PR1 A3636H29	122	4098	
	42 x 36	PR1 A4236H29	133	4514	
~~					