
Price List

JUMP TO PRICING CLICK HERE

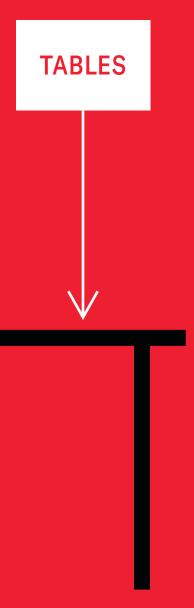

Somet 01 March 2022

Prices

All prices are list price, effective with date printed on cover, and supersedes all other published price lists. Orders within the 48 contiguous United States will be assessed a freight charge based on a percentage of the total net price, or a flat rate of \$250*, whichever is greater. A minimum charge of \$300* will apply to all shipments to Canada. Fees will be calculated using the zone map located on page 917. Normal delivery is on a dock-to-dock basis. Additional charges may apply on special requests noted on the customer's purchase order such as inside delivery, "call before," etc.

Versteel reserves the right to change prices, shipping fees, or specifications without prior notice. Orders are accepted subject to price prevailing at time of shipment.

Acknowledgement

Orders are accepted, manufactured, and invoiced in accordance with the acknowledgement. Notify Versteel immediately of any discrepancies.

Acknowledged orders may not be cancelled or modified without written consent from Versteel.

Orders

All orders must be received in writing, accompanied by final material and finish specifications for order entry.

CONTACT VERSTEEL

EMAIL contact@versteel.com

TELEPHONE 800 876 2120

812 634 2120

FACSIMILE 812 482 9318

MAILING ADDRESS

Versteel 2332 Cathy Lane Jasper, IN 47546

Faxed orders are accepted. Duplicate orders that are received by mail (after having been faxed) and not marked "Confirmation" are the responsibility of the customer.

Telephone orders must be confirmed in writing within 24 hours, marked "Confirmation." Duplicate orders not marked "Confirmation" are the responsibility of the customer.

OS Quickship Program

Available for select products in the Deci, Paces, Performance, Vela and Wavelink table lines along with select products in the Chela, Companion, Kompis, OH!, SIMON, Quanta Max and The Maker Project seating lines.

The Versteel Quickship Program consists of up to 50 tables, 25 tables with modesty panels or 100 chairs in 10 working days from time of order (received by 12pm EST).

Orders must be accompanied by final material and finish specifications for order entry. They must be clearly marked "Quickship" and consist of products from the program. Quickship orders cannot be changed or cancelled, and credit approval must be acquired within 24 hours.

For additional information see Versteel.com

Credit

You are requested to enclose one bank reference and three trade references with your initial order.

Credit Cards

Versteel accepts Mastercard, Visa & AMEX credit card payment for invoiced sales. Credit card information must be presented along with the Sales Order (with a signed Credit Card Authorization Form attached). There is no cash discount extended to credit card orders. Credit cards will be charged at time of shipment. A 2.5% processing fee will be applied for all credit card purchases. Processing fee will not be applied to GSA or contract orders. Versteel will not accept credit cards for payment of account balances.

Changes or Cancellation

Any change or cancellation to an order must be submitted in writing and confirmed by Versteel Customer Service before the change or cancellation is effective. Due to short lead times, any change or cancellation may result in charges if materials have entered the production process.

Packaging

Versteel has no crate or packaging charge on standard products. All items are packaged to ensure delivery in excellent condition under normal handling by freight personnel. Versteel reserves the right to bulk pack or skid load tops in large quantities.

Shipping Schedule

Standard Items

| Laminate, Convex T-Mold Edge | 3-5 WEEKS |
|------------------------------|-----------|
| Laminate, PVC Edge | 3-5 WEEKS |
| Laminate, Wood Edge | 3-5 WEEKS |
| Laminate, Urethane Edge | 6-8 WEEKS |
| Veneer, Wood Edge | 6-8 WEEKS |
| Powder Coat Tops | 4-6 WEEKS |
| KrystalCast® Tops | 7-8 WEEKS |

Contact Versteel for special lead time requests.

Shipping

Normal delivery is on a dock-to-dock basis, F.O.B. Versteel's factory in Jasper, Indiana. Special requests such as inside delivery, "call before," etc. should be noted on the customer's purchase order and are subject to additional charges. See freight program on page 917 for shipping charges.

Tables are shipped disassembled unless Assembled Folding Table option is selected; tops and base(s) ship simultaneously. ODIS, TIM and tilt-fold tables are shipped assembled. TIM fixed tables are cartoned separately.

Orders shipping outside of the contiguous 48 United States will have shipping quoted as a separate item.

FOB ORIGIN, FREIGHT PREPAID

Versteel 2332 Cathy Lane Jasper, IN 47546

Shipping Damage Claims or Shortages

Legal title of merchandise passes to the buyer upon acceptance of the carrier. All cartons must be carefully inspected upon delivery. Visibly damaged product should not be accepted from the carrier until the damage is noted on delivery receipt. Versteel will not accept responsibility if the delivery receipt is signed as "clear". Retain any damaged goods and take photos for claim filing purposes. Details of visible damage should be noted on the delivery receipt. Shortages must be noted on the bill of lading prior to accepting the shipment.

Concealed Damage

If concealed damage is discovered, the receiver must notify the freight carrier within 5 business days from receipt of the product(s). For claim consideration the receiver must request an inspection of the damaged goods by the carrier. All damaged product and packaging should be retained and photos taken for claim filing use. Inspections must occur at the original delivery point to be considered for claim submittal. Reports of concealed damage after five business days will not be considered.

Partial Shipments

Versteel makes every attempt to ship orders complete and on schedule. However, we reserve the right to make partial shipments as product is ready, in an effort to get your order to you as quickly as possible. Invoices covering these shipments are to be paid as they become due.

Returns

No return merchandise will be accepted without Versteel's written consent and shipping instructions. Unauthorized returns will not be accepted.

Terms

Terms are 1%, 10 days, net 30 days from date of invoice.

Force Majeure

Versteel shall be excused from the duty to render timely performance of any obligation hereunder if such inability to perform is caused directly or indirectly by act of God, flood, war, riot, fire, accident, explosion, strikes or labor trouble, act of government, delay or default by a subcontractor or supplier of materials or services, transportation difficulty or delay, the existence of any circumstance making performance commercially impracticable or any other cause beyond Versteel's reasonable control. Buyer's obligation to make any payment due and owing to Versteel shall not be excused for any reason whatsoever.

Oversized Shipping Fee

Orders received for items or tops greater than 94" in length will receive a \$200 or net oversized shipping fee per order. Fee not applied to orders with multi-piece tops where each section is less than 94" in length.

Warranty

All table and seating products manufactured by Versteel are guaranteed by a Lifetime Warranty against defects in materials and workmanship from the date of purchase. Products manufactured/adapted for use in a Pavilion or Pop-Up setting are covered under a three (3) year warranty against defects in materials and workmanship from date of purchase.

Electrical items manufactured by Versteel are guaranteed against defect for a period of five (5) years from date of purchase.

Electrical items not manufactured by Versteel are covered by the manufacturers under their specified warranty.

Consumables such as gas cylinders, casters and glides are covered for a period of one (1) year. Adjustable height bases with crank and counterbalanced components, are covered under a two (2) year warranty. Versteel will not cover labor costs associated with replacing the casters or glides.

Wood veneer is warranted for a period of ten (10) years. Natural variations in grain, color or texture of wood should not be construed as defects under this warranty.

Versteel will replace or repair (at our discretion) without cost to our customers any item manufactured by Versteel found to be defective as a result of defective material or workmanship and is still owned by the original purchaser. We will not, however, repair any item which is not properly installed, abused or subject to any use other than that which was originally intended. Warranty does not cover normal wear and tear of the product, which is expected over the course of ownership. Any repairs by the customer must receive specific written authorization from Versteel before being executed on location to receive proper reimbursement for associated costs. In no event shall liability under this warranty exceed the original purchase price.

Pavilion and Pop-Up products must be covered and out of direct sunlight. Use location must be a minimum of 100 miles from saltwater

Warranty on plastic laminates, Corian®, KrystalCast® and upholstery is not covered by Versteel but is covered by laminate, Corian®, KrystalCast® and textile manufacturers under their specified warranty only. All foams, fabrics and vinyls are prone to stretch and loosen over time through normal use. This natural effect, called puddling, is covered for a period of one (1) year from the date of purchase.

There are no other warranties expressed or implied.

Care of Laminate Surfaces, T-Mold, Bumper, PVC Edges and Urethane

Clean with a mild soap solution and rinse with clean, clear water. Wipe the entire surface, moving with the pattern and follow with a clean, dry soft cloth. When a wood edge exists, follow instructions found under "Care of Wood Edges and Veneer Surfaces" for edge.

Care of Wood Edges and Veneer Surfaces

Clean all surfaces frequently with water-dampened soft cloth, moving the cloth with the grain direction. Quickly buff dry. Immediately remove any liquids that come in contact with wood surfaces using a blotting action to absorb liquid. Lift objects to move them. Never pull them across the finished surface.

For an additional safeguard, use a protective surface pad. Doing so could ensure a lasting finish by protecting your furniture from possible damage caused by pens and sharp objects.

Avoid exposing furniture to extreme heat and cold or to wide humidity variances. Avoid exposing furniture to strong sunlight. Do not use soaps, commercial cleaners or harsh solvents (nail polish remover, acetates, etc.) as they will cause finish deterioration. If using a protective glass top, place spacer pads under the glass top to allow the wood to breathe.

Care of Corian® Surfaces

Clean regularly with a cloth or sponge wrung out in warm soapy water. You can also use ammonia-based cleaners or commercial cleaners recommended for use on Corian® surfaces. Wipe up any water spills immediately so as not to leave a film that makes the finish look blotchy.

Care of Powder Coat Work Surfaces

Clean with warm water and mild soap and rinse with clean, warm water. Windex Multi-Surface Disinfectant and Windex All Purpose cleaner can be used for deep cleaning. Using a pump spray bottle, apply a normal amount of cleaner onto a clean microfiber or paper towel. Wipe the desired area until dry. Do not spray directly onto the surface or let sit un-wiped for an extended period.

Care of KrystalCast® Surfaces

Clean with a dish soap and water mixture in a spray bottle with a Green Scotch Brite 3M scrub pad to loosen all dirt and goo (including oil and wine stains, etc). Dry with a clean dry rag. Do not use solvents such as acetone, lacquer thinner, gasoline, undiluted alcohol or benzene.

Care of Powder Coat and Nickel

Clean with a mild soap solution and rinse with clean, clear water. Wipe the entire surface and follow with a clean, dry cloth to buff dry.

Care of Chrome Bases

Clean with a wet cloth or window cleaner. For scuff marks or heavy soiling, a non-abrasive automotive chrome polish can be applied as directed.

Maintenance of Mechanical Parts

Clean any lint or debris from the moving parts of the E-Z install tilt or folding base mechanisms. Do not apply lubricant. Mechanisms have been designed and tested to not require lubrication under normal conditions.

Care of Upholstered Tack Panels

For Versteel standard fabrics and vinyls, consult the back of the appropriate swatch card for cleaning codes and any specific instructions. For COM materials, consult with the individual textile manufacturer for cleaning codes and any specific instructions pertaining to your particular fabric.

Objective

It is the objective of Versteel to adhere to Federal, State and local laws and codes, ordinances and regulations as may be applicable to control environmental risks, prevent harm to the public health and welfare, and to preserve our natural resources. Versteel acknowledges the necessity of commitment and hereby commits its resources of all levels of its management and all employees of the company to accomplish this objective.

Policy Statement

Each Versteel facility has the responsibility to:

Develop environmental policies which implement regulatory compliance requirements and provide management guidance and support with applicable environmental laws.

Train and motivate personnel to work in an environmentally acceptable manner and to understand and comply with government regulations within the scope of Versteel operations.

Communicate the importance of personal responsibility protection to all employees through formal training. Each employee will be aware of the environmental regulations applicable to their job functions, including limitations and functional restrictions of permits, spill control, emergency response actions, proper waste handling procedures, etc.

Communicate and continually assess relevant environmental developments on operations of the facilities and personnel.

Require sub-contractors or contractors (third parties working for, with, or on behalf of Versteel) to follow Versteel's environmental procedures while working within their facilities.

Make responsible personnel available at all times to carry out environmental procedures, especially under emergency situations.

Apply sound management practices and operating procedures.

Implement appropriate control technologies and process guidelines for preventive and corrective maintenance systems to minimize actual and potential environmental harm and exposures.

Communicate effectively with government and the public regarding serious environmental incidents should they ever occur.

Minimize the generation, emission or discharge of waste, and harmful or regulated substances and pollutants from operations to the extent most practical with laws and regulations. Ensure proper disposal of all waste.

Substitute materials or processes to allow the use of less hazardous substances where feasible.

Secure and maintain all environmental permits required for operation. Maintain up-to-date files of all environmental reporting requirements and make this information available for easy access at each operating facility.

Evaluate the causes behind any serious environmental incidents and establish procedures to avoid recurrence.

There is a sincere effort at Versteel to maintain our responsibility to the environment and to our employees. We are mindful of the effectiveness and improvements required to ensure environmentally safe conditions and to preserve our natural resources.

We pride ourselves on exceeding the standards set forth by federal, state and local codes.

Our electroplating plant consistently earns local annual environmental awards, and all of our products have met the requirements for Intertek Green Leaf VOC/VOC+ certification.





At Versteel, we feel it is our responsibility as a manufacturer to build products in a manner that promotes a safe and healthy environment for everyone. We maintain detailed information regarding the environmental impact of all Versteel products. If you have questions regarding our environmental policy or would like more information, please contact Versteel Customer Service at 800.876.2120.

Base Construction

Versteel bases are constructed of a column, base and a mounting top plate in many styles and sizes.

 Mounting top plates attach to the column to allow attachment to the top.

FIXED BASES

Fixed bases feature a heavy gauge plate and are field installed into marked pre-drilled positions on the top with hardware provided.

TILT BASES

The 10 gauge upper plate is factory installed on the table top. The 7 gauge lower formed plate is attached to the base column.

FOLDING BASES

Folding bases feature a formed pan with welded construction that is connected to a wire formed frame. The wire formed frame acts as stacking bumpers and carrying handles for the table. Bases can be field installed into marked pre-drilled positions with provided hardware or request the option for factory installation.

- 2) Columns are constructed of 16 or 14 gauge tubular steel in a variety of shapes and diameters appropriate to the series and base styles.
- Base rails, feet or discs attach to the column and are heavy gauge steel to create a very stable table with glides to provide ¾" vertical adjustment for leveling the table.

Base Shipping Specifications

All Series TC, T1, T2 bases, W2, P3, P4 columns and D1 disc base ship assembled from the factory. Brattice, Uno and Vela Series X1 and X4 bases and Vela Y3 base also ship assembled from the factory. Performance and Tuscany Series X1 and X4 bases ship unassembled for field assembly.



Manufacturer certifies that products meet or exceed applicable ANSI/BIFMA standards and testing.

Quality Standards

All Versteel table bases are constructed to pass the industry test standards set forth by BIFMA. For more detailed specifications by series and base style, contact Versteel Customer Service at 800.876.2120.



Reference Table Heights

Tables can be specified at many different heights based on your application needs. Standard Versteel tables are 29" from the floor to the table surface. The Interplay Rover Pup is 26 %" from the floor to the surface for use as a pull-up typing surface or can roll under most surfaces to store out of the way.

Suggested typing height table is 26 ¾"
Suggested wheelchair height table is 32"
Suggested counter height table is 36"
Suggested stand up height table is 42"



TIM Base Construction

TIM table bases are constructed of 14 gauge round tube upper legs with 16 gauge round tube telescoping height adjustment lower leg sections. Guide bushings inside the legs are molded from nylon bushing materials to provide smooth, quiet operation of the height adjustment feature. The height adjustment button is made of solid steel with a spring actuated movement. A Height Adjustment Lock Out Kit is available if you wish to lock out the push-button height adjustment feature.

FIXED BASES

Fixed bases feature a '4" thick mounting top plate and are field installed into pre-drilled holes with hardware provided. TIM tables with fixed bases include the push-button height adjustment feature.

NOTE FIXED BASES ARE SHIPPED SEPARATE FROM THE TOP AND ONLY REQUIRE SCREW ATTACHMENT TO ASSEMBLE

TILT-NEST-FOLD BASES

Tilt feature is cable actuated with the pull of a release handle located under the table top on the end of the surface. The cable operates two brake control mechanisms mounted on each end of the table to support the top. Nest-fold features are constructed of die cast metal components and 14 gauge round tube, fully enclosed in reinforced plastic housings for smooth, quiet operation.

NOTE THE TABLE IS SHIPPED FACTORY ASSEMBLED FOR IMMEDIATE USE AFTER LINCARTONING

Reference Table Heights

TIM tables are constructed with push-button height adjustment to provide five inches of vertical movement. The top leg hole position will set the surface height at 27" with the third from the top hole for 29" standard seated task, and the bottom round hole providing the 32" surface height required for wheelchair applications. The adjustment holes are at 1" spacing increments.

c us

Manufacturer certifies that products conform to UL Std 962 and are certified to Canadian standard CSA.T.I.L No. A-30.



Manufacturer certifies that products meet or exceed applicable ANSI/BIFMA standards and testing.

Laminate and Veneer, Standard Core Construction

The standard top construction consists of a 45-50 pound particleboard, surfaced with a high pressure laminate or veneer face. A backer sheet is laminated to the under side of the top. Tops are shipped predrilled for field installation of bases and accessories.

Laminate, Lightweight Core Construction - 1 1/4"

Lightweight core is a multi-ply birch plywood, with a density of around 28 lbs. per cubic ft., offering a 30%–35% weight reduction for a typical table vs. standard core. The tops are surfaced with a high pressure laminate face. A backer sheet is laminated to the under side of the top, and tops are shipped pre-drilled for field installation of bases and accessories. Lightweight core is only available on 1 $\frac{1}{4}$ " thick tops.

The lightweight plywood construction allows for mounting of bases or other accessories at any location under the top.

Lightweight core is available as an option for tops that are no larger than 48" x 96".

NOTE LIGHTWEIGHT TOPS LARGER THAN 48° X 96° REQUIRE A SPECIAL QUOTE. CONTACT VERSTEEL FOR PRICING AND AVAILABILITY

NOTE LIGHTWEIGHT CORE ONLY AVAILABLE ON LAMINATE TOPS

Alternate Core Construction

Alternate core constructions are available, including medium density fiberboard (MDF), honeycomb cores, and cores that contain no urea formaldehyde. Contact Versteel for pricing and availability.

PVC Flat or Fluted Edge



Edge of 2mm PVC hot melt banded to the top with $\frac{1}{2}$ " radius at the top and bottom. Corners with 1 $\frac{1}{2}$ " radius or square corners are available on $\frac{1}{2}$ ", 1 $\frac{1}{2}$ " or 1 $\frac{1}{2}$ " edge thicknesses.

Offered in twenty-one (21) standard colors.

Convex T-Mold Edge



Edge of %e" thick solid vinyl convex t-mold with 1 $\frac{1}{2}$ " radius corners on $\frac{1}{2}$ ", 1 $\frac{1}{2}$ " edge thicknesses. Offered in four (4) standard colors.

Wood Flat or Fluted Edge



Wood banding hot melt banded to the top with 1% radius at the top and bottom. Corners with 1 1% radius or square corners are available on 1% and 1 1% edge thicknesses.

Offered in Maple, Walnut or Cherry materials.

Bumper Edge



Exposed ply core banding with rubberized %" width bumper in the center of profile. Corners with 1 %" radius are available on %" and 1 %" edge thicknesses. Offered in black bumper standard color.

Reverse Bevel Acrylic



Edge of 2mm acrylic edge banding hot melt banded to MDF core. A reverse bevel is then cut into the edge exposing the MDF on the reverse bevel. The MDF is then clear coated.

Wood Square or Fluted Edge - 1 1/4"



Edge of 1 %" wide solid wood with softened top and bottom edges, and square, softened mitered corners. Available on %", 1 %" and 1 %" edge thicknesses. Offered in Maple, Walnut or Cherry materials.

Wood Bullnose Edge - 1 1/4"



Edge of 1 1" wide solid wood with a full bullnose edge, and 1" radius mitered corners. Available on 1%", 1 14" and 1 14" edge thicknesses.

Offered in Maple, Walnut or Cherry materials.



Wood Reverse Bevel Edge - 2"



Edge of 2" wide solid wood designed with a reverse sloped edge on one side and a flat wood edge on the remaining three sides for all Entourage cabinets. When specified on Elements Conference the reverse bevel detail will be on all four sides with mitered corners. Available on 1 ¼" edge thicknesses.

Offered in Maple, Walnut or Cherry materials.

Wood Ergo Edge - 1 $\frac{3}{4}$ " or 2 $\frac{1}{2}$ "



Edge of 1 34" wide (on 16" thick tops) or 2 16" wide (on 16" thick tops) solid wood designed with a sloped edge for added comfort with softened, mitered corners

Offered in Maple, Walnut or Cherry materials.



Urethane Ergo Edge (User Side) - 1 ¾"

Edge of 1 ¾" wide molded urethane designed with a sloped ergonomic edge on one side and a ¼" wide square urethane edge on the remaining three sides. Corners are square. Available on ¾" edge thicknesses. Offered in five (5) standard colors.

Urethane/PVC Ergo Edge (User Side) - 1 3/4" & PVC

Edge of 1 %" wide molded urethane designed with a sloped ergonomic edge on one side and a 2mm PVC flat edge on the remaining sides. PVC corners are available in square or radius on %" and 1 %" edge

Urethane offered in five (5) colors with matching PVC colors. When specifying Chicory contact Customer Service for availability.

Laminate Modesty, General Core Construction

The modesty panel is constructed of ¾" thick, 45-50 lb. medium density particle board surfaced with high pressure laminate face on both sides. The modesty panel is 8" high on Vela and 10" high on Brattice and Performance series and extends the length of the top. The modesty panel is located along the front edge of the table for maximum leg and knee clearance.

Fixed Modesty (FixMod XM)

The Fixed Modesty panel is mounted to the top with screws through steel brackets and must be field installed into pre-drilled positions in the top. All mounting hardware is packed with the modesty panel. Finish details match the top unless specified differently.

Removable Modesty (RemMod RM)

The Removable Modesty panel slides into heavy duty steel brackets that are mounted to the top. Simply tighten the handwheels to keep the modesty panel in position or loosen to remove the panel. For storage, the modesty attachment pins can be rotated 90° to prevent marring of the top surfaces. Finish details match the top unless specified differently.

Folding Modesty (FoldMod FM)

The Folding Modesty panel is mounted to the top with heavy duty hinge assemblies. A sliding brace supports the modesty panel in the set-up position and also holds the modesty panel in place in the stored position. Finish details match the top unless specified differently.



Form Metal Modesty, General Construction

The modesty panel is constructed with an aluminum extruded back panel and a perforated hinged steel door. There are three (3) separate unobstructed channels that allow the routing of power and data cables, with a wire exit on the back for the top and middle channel. The Form Modesty panel is 10" high and extends the length of the top on Brattice, Performance and Vela. The Form Modesty panel is located along the front edge of the table for maximum leg and knee clearance. Accessory end cap trim kit available.

NOTE RADIUS CORNERS ARE NOT RECOMMENDED ON THE TABLE TOP WHEN A FORM MODESTY IS SPECIFIED

Fixed Form Modesty (FixFormMod XF or XFS)

The Fixed Form Modesty panel is mounted to the top with screws through steel brackets. The fixed modesty panel must be field installed into pre-drilled positions in the top. All mounting hardware is packed with the modesty panel. Extruded back panel is black with powder coat options for the perforated steel door. Powder coat finish on perforated door matches the base finish unless specified differently. Transparent powder coat finishes are not available.

NOTE RADIUS CORNERS ARE NOT RECOMMENDED ON THE TABLE TOP WHEN A FORM MODESTY IS SPECIFIED

NOTE XFS INDICATES SQUARE MODESTY CONSTRUCTION WITH SQUARE HOLES

Folding Form Modesty (FoldFormMod FF)

The Folding Form Modesty panel is mounted to the top with heavy duty steel hinge assemblies. A sliding brace supports the modesty panel in the set-up position and also holds the modesty panel in place in the stored position. Extruded back panel is black with powder coat options for the perforated steel door. Powder coat finish on perforated door matches the base finish unless specified differently. Transparent powder coat finishes are not available.

NOTE RADIUS CORNERS ARE NOT RECOMMENDED ON THE TABLE TOP WHEN A FORM MODESTY IS SPECIFIED



Fixed Lightweight Form Modesty (FixLightweightFormMod XL or XLS)

The Fixed Lightweight Form Modesty panel is a lightweight version of the Versteel Form Modesty. It is a formed steel perforated panel that is mounted to the top with screws through steel brackets. It must be field installed into pre-drilled positions in the top. A deep channel in the back of the panel allows for the routing of power and data cables inside of the modesty. Mounting hardware is packed with the modesty panel. Powder coat finish on the perforated panel matches the base finish unless specified differently. Transparent powder coat finishes are not available.

NOTE RADIUS CORNERS ARE NOT RECOMMENDED ON THE TABLE TOP WHEN A FORM MODESTY IS SPECIFIED

NOTE XLS INDICATES STRAIGHT MODESTY CONSTRUCTION W/SQUARE HOLES

Hanging Modesty (HangMod HM)

The hanging modesty is mounted to the top with a metal hinge that is factory installed. This mechanism pivots if the table is tilted to allow for a 90 degree slim-tilt. Finish details match the top unless specified differently.



Removable Lightweight Form Modesty (RemLightweightFormMod RL or RLS)

The Removable Lightweight Form Modesty panel slides into heavy duty steel brackets that are mounted to the top. Simply tighten the handwheels to secure the modesty in position, or loosen them to remove the panel. Powder coat finish on the perforated panel matches the base finish unless specified differently. Transparent powder coat finishes are not available.

NOTE RADIUS CORNERS ARE NOT RECOMMENDED ON THE TABLE TOP WHEN A FORM MODESTY IS SPECIFIED

NOTE RLS INDICATES SQUARE MODESTY CONSTRUCTION WITH SQUARE HOLES



Panel Modesty (MPL and MPV)

The Panel Modesty is constructed of ½" hardboard core with laminate or veneer face and back surfaces, machined with exposed edges. Panel Modesty can be specified on both fixed and tilt-nest-fold base tables and will swing out to nest on the table. The 8½" high Panel Modesty is field mounted with hook brackets, installed with handwheels under the table top. Threaded inserts are installed in the top when Panel Modesty is specified with the table. Panel Modesty shapes complement the rectangle and arc rectangle top shapes. Finish details match the top unless specified differently.






Sail Modesty (MS__)

AVAILABLE ON

The Sail Modesty panel is constructed of Lycra® fabric hooked into slotted holes on the table legs then stretched and hooked over pegs on the under surface of the table top. Sail Modesty panels can be specified on both fixed and tilt-nest-fold base tables and can be stored on table when tilted, nested or folded on table transport. All TIM tables are pre-drilled for the field installation of the Sail Modesty. Top pegs are installed when Sail Modesty is specified with the table. Sail Modesty is available in coordinating colors of Alabaster, Alloy, Ebony and Frost.



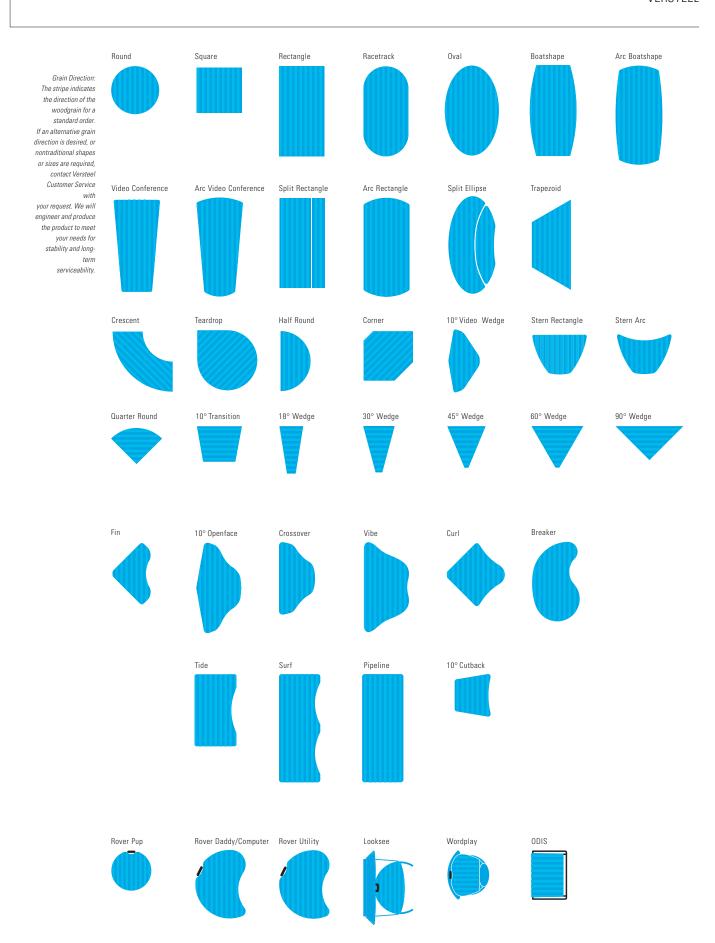

Seating Accommodations

The following seating accommodations are based on average chair widths of 30". These figures may vary dependent on end users' chair width and style.

Round

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" | 2 |
| 30" | 2 |
| 36" | 3-4 |
| 42" | 4 |
| 48" | 4 |
| 54" | 4-6 |
| 60" | 6 |

Square

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" | 2 |
| 30" | 2 |
| 36" | 4 |
| 42" | 4 |
| 48" | 4 |
| 54" | 4-8 |
| 60" | 8 |

Rectangle

42" x 72"

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 18" x 48" | 1 |
| 18" x 60" | 2 |
| 18" x 72" | 3 |
| 18" x 84" | 4 |
| 18" x 90" | 4 |
| 18" x 96" | 4-5 |
| 24" x 30" | 2 |
| 24" x 36" | 2 |
| 24" x 42" | 2, TIM 1, TOD 1 |
| 24" x 48" | 2, TIM 1, TOD 1 |
| 24" x 60" | 2-3, TIM 2, TOD 2 |
| 24" x 72" | 3, TIM 2, TOD 2 |
| 24" x 84" | 4, TOD 2-3 |
| 24" x 90" | 4, TOD 2-3 |
| 24" x 96" | 4-5, TOD 3-4 |
| 30" x 36" | 2 |
| 30" x 42" | 2, TIM 1, TOD 1 |
| 30" x 48" | 2-4, TIM 1, TOD 1 |
| 30" x 60" | 4, TIM 2, TOD 2 |
| 30" x 72" | 6, TIM 2, TOD 2 |
| 30" x 84" | 6, TOD 2-3 |
| 30" x 90" | 6, TOD 2-3 |
| 30" x 96" | 8, TOD 3-4 |
| 30" x 120" | 8 |
| 36" x 48" | 2-4 |
| 36" x 60" | 4-6 |
| 36" x 72" | 6-8 |
| 36" x 84" | 6-8 |
| 36" x 90" | 8 |
| 36" x 96" | 8-10 |
| 36" x 120" | 8-10 |

6-8

Rectangle (continued)

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 42" x 84" | 6-8 |
| 42" x 96" | 8-10 |
| 48" x 96" | 8-10 |
| 48" x 120" | 8-10 |
| 48" x 144" | 10 |
| 48" x 168" | 10 |
| 48" x 192" | 10-12 |
| 60" x 120" | 10-12 |
| 60" x 144" | 10-12 |
| 60" x 168" | 12 |
| 60" x 192" | 12-14 |
| 60" x 240" | 16-18 |
| | |

Pipeline

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 22" x 48" | 1-2 |
| 22" x 60" | 2-4 |
| 22" x 72" | 2-4 |
| 24" x 48" | 1-2 |
| 24" x 60" | 2-4 |
| 24" x 72" | 2-4 |
| 28" x 48" | 1-2 |
| 28" x 60" | 2-4 |
| 28" x 72" | 2-4 |
| 30" x 48" | 1-2 |
| 30" x 60" | 2-4 |
| 30" x 72" | 2-4 |
| 34" x 48" | 1-2 |
| 34" x 60" | 2-4 |
| 34" x 72" | 2-4 |
| 36" x 48" | 1-2 |

Tide

36" x 60"

36" x 72"

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 22" x 48" | 1-2 |
| 24" x 48" | 1-2 |
| 28" x 48" | 1-2 |
| 30" x 48" | 1-2 |
| 34" x 48" | 1-2 |
| 36" x 48" | 1-2 |

2-4 2-4

Surf

| ouri | |
|---------------|------------------------|
| SIZE OFFERING | SEATING ACCOMMODATIONS |
| 22" x 60" | 2-4 |
| 22" x 72" | 2-4 |
| 24" x 60" | 2-4 |
| 24" x 72" | 2-4 |
| 28" x 60" | 2-4 |
| 28" x 72" | 2-4 |
| 30" x 60" | 2-4 |
| 30" x 72" | 2-4 |
| 34" x 60" | 2-4 |
| 34" x 72" | 2-4 |
| 36" x 60" | 2-4 |
| 36" x 72" | 2-4 |

Seating Accommodations (continued)

The following seating accommodations are based on average chair widths of 30". These figures may vary dependent on end users' chair width and style.

Arc Rectangle

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 36" x 72" | 6-8 |
| 36" x 84" | 6-8 |
| 36" x 96" | 8-10 |
| 42" x 72" | 6-8 |
| 42" x 84" | 6-8 |
| 42" x 96" | 8-10 |
| 48" x 96" | 8-10 |
| 48" x 120" | 8-10 |
| 48" x 144" | 10 |
| 48" x 192" | 10-12 |
| 60" x 120" | 10-12 |
| 60" x 144" | 10-12 |
| 60" x 192" | 12-14 |
| 60" x 240" | 16-18 |
| | |

Racetrack

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 36" x 72" | 4 |
| 42" x 84" | 6 |
| 42" x 96" | 8 |
| 48" x 96" | 8 |
| 48" x 120" | 8-10 |
| 48" x 144" | 10 |
| 48" x 192" | 10-12 |
| 60" x 120" | 10-12 |
| 60" x 144" | 10-12 |
| 60" x 192" | 12-14 |
| 60" x 240" | 16-18 |

Oval

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 36" x 72" | 4-6 |
| 42" x 84" | 6 |
| 42" x 96" | 8 |
| 48" x 84" | 6 |
| 48" x 96" | 8 |
| 48" x 120" | 10 |
| 48" x 144" | 10 |
| 60" x 120" | 10-12 |
| 60" x 144" | 10-12 |

Breaker

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 36" x 54" | 1 |

Boatshape

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|------------------|------------------------|
| 30" x 42" x 84" | 6 |
| 30" x 42" x 96" | 8 |
| 36" x 48" x 96" | 8 |
| 36" x 48" x 120" | 8-10 |
| 36" x 48" x 144" | 10 |

Boatshape (continued)

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|------------------|------------------------|
| 42" x 48" x 96" | 8 |
| 42" x 48" x 120" | 8-10 |
| 42" x 48" x 144" | 10 |
| 48" x 60" x 192" | 12-14 |
| 48" x 60" x 240" | 16-18 |

Arc Boatshape

| ERING | SEATING ACCOMMODATIONS |
|---|--------------------------|
| 3" x 96" | 8 |
| 3" x 120" | 8-10 |
| 3" x 144" | 10 |
|)" x 192" | 12-14 |
|)" x 240" | 16-18 |
| " x 96" " x 120" " x 144" " x 192" | 8 8-10 10 12-14 |

Video Conference

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|------------------|------------------------|
| 36" x 48" x 96" | 8-10 |
| 36" x 48" x 120" | 8-10 |
| 36" x 48" x 144" | 10 |
| 48" x 60" x 120" | 8-10 |
| 48" x 60" x 144" | 10 |
| 48" x 60" x 192" | 10-12 |
| 48" x 60" x 240" | 16-18 |
| | |

Arc Video Conference

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|------------------|------------------------|
| 36" x 48" x 96" | 8-10 |
| 36" x 48" x 120" | 8-10 |
| 36" x 48" x 144" | 10 |
| 48" x 60" x 120" | 8-10 |
| 48" x 60" x 144" | 10 |
| 48" x 60" x 192" | 10-12 |
| 48" x 60" x 240" | 16-18 |
| | |

Split Ellipse

| SIZE OFFERING | SEATING ACCOMMODATION: |
|---------------|------------------------|
| 36" × 60" | 1 |
| 36" x 72" | 1 |

Split Rectangle

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 36" x 48" | 1 |
| 36" x 60" | 2 |
| 36" x 72" | 2 |

Corner

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 42" | 1 |
| 30" x 48" | 1 |

Video Wedge

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 48" | 2 |
| 30" x 60" | 2 |
| 36" x 72" | 2 |
| | |

Seating Accommodations (continued)

The following seating accommodations are based on average chair widths of 30". These figures may vary dependent on end users' chair width and style.



Openface

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 48" | 2 |
| 30" x 60" | 2 |
| 36" x 72" | 2 |



Stern Rectangle

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 42" x 30" | 2 |
| 48" x 35" | 2 |



Stern Arc

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 42" x 26" | 2 |
| 48" x 30" | 2 |



| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 30" | 1 |
| 30" x 30" | 1 |
| 26" / 20" | 1 |



| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 30" | 1 |
| 30" x 30" | 1 |
| 36" x 30" | 1 |



Trapezoid

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 48" | 4-5 |
| 24" x 72" | 4-5 |
| 30" x 60" | 4-5 |
| 36" x 72" | 4-5 |



Crescent

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 75" | 4-5 |
| 24" x 94" | 4-6 |
| 30" x 94" | 5-7 |
| 36" x 113" | 7-8 |



Teardrop

| SIZE OFFERING | SEATING ACCOMMODATION: |
|---------------|------------------------|
| 42" x 24" | 4 |
| 52" x 30" | 4-5 |



Half Round

| SIZE OFFERING | SEATING ACCOMMODATION |
|---------------|-----------------------|
| 24" x 48" | 2-4 |
| 30" x 60" | 2-4 |
| 36" x 72" | 2-4 |
| | |



Crossover

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 24" x 48" | 2 |



Vibe

| SIZE OFFERING | SEATING ACCOMMODATIONS |
|---------------|------------------------|
| 30" x 60" | 3 |

SEATING ACCOMMODATIONS



| * Linking top, | 24" | 1* |
|--|-----|----|
| not recommended for seating if top is not | 30" | 1 |
| supported by a base. | 36" | 1 |



18° Wedge

| • | SIZE OFFERING | SEATING ACCOMMODATIONS |
|--|---------------|------------------------|
| * Linking top, | 18° 24" | LINKING TOP* |
| not recommended for seating if top is not | 18° 30" | LINKING TOP* |
| supported by a base. | 18° 36" | LINKING TOP* |



30° Wedge

| | SIZE OFFERING | SEATING ACCOMMODATIONS |
|--|---------------|------------------------|
| * Linking top, | 30° 24" | LINKING TOP* |
| not recommended for seating if top is not | 30° 30" | LINKING TOP* |
| supported by a base. | 30° 36" | LINKING TOP* |



45° Wedge

| | SIZE OFFERING | SEATING ACCOMMODATIONS |
|--|---------------|------------------------|
| * Linking top, | 45° 24" | LINKING TOP* |
| not recommended for seating if top is not | 45° 30" | LINKING TOP* |
| supported by a base. | 45° 36" | LINKING TOP* |



60° Wedge

| • | |
|---------------|------------------------|
| SIZE OFFERING | SEATING ACCOMMODATIONS |
| 60° 24" | LINKING TOP* |
| 60° 30" | LINKING TOP* |
| 60° 36" | LINKING TOP* |
| | 60° 24" 60° 30" |



90° Wedge


| | SIZE OFFERING | SEATING ACCOMMODATIONS |
|--|---------------|------------------------|
| * Linking top, | 90° 24" | LINKING TOP* |
| not recommended for seating if top is not | 90° 30" | LINKING TOP* |
| supported by a base. | 90° 36" | LINKING TOP* |




| FIN | | |
|-----|---------------|------------------------|
| | SIZE OFFERING | SEATING ACCOMMODATIONS |
| | 24" | 1 |
| | 30" | 1 |
| | 36" | 1 |




| Curl | |
|---------------|------------------------|
| SIZE OFFERING | SEATING ACCOMMODATIONS |
| 30" | 2 |
| 36" | 2 |

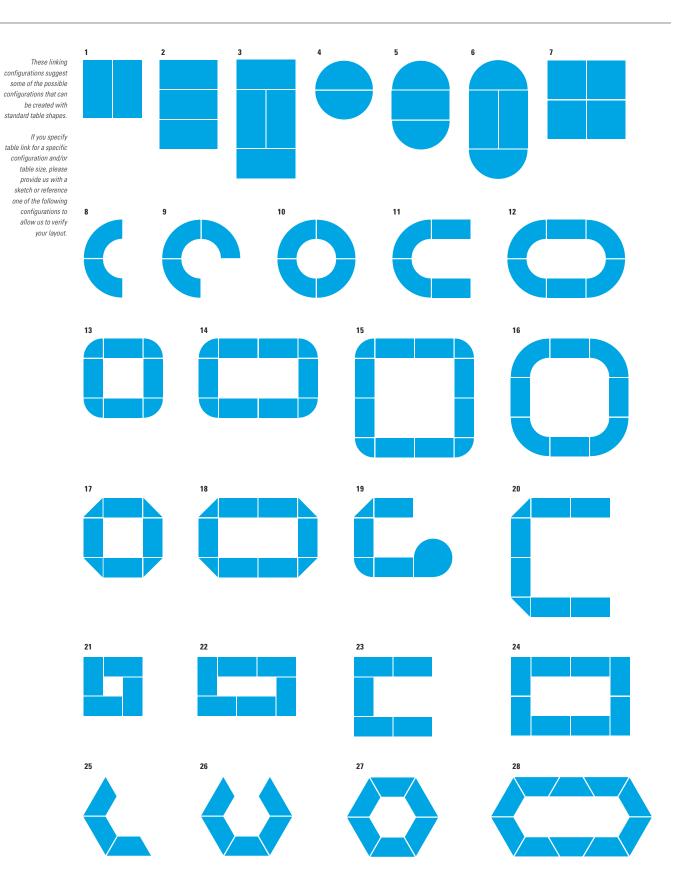


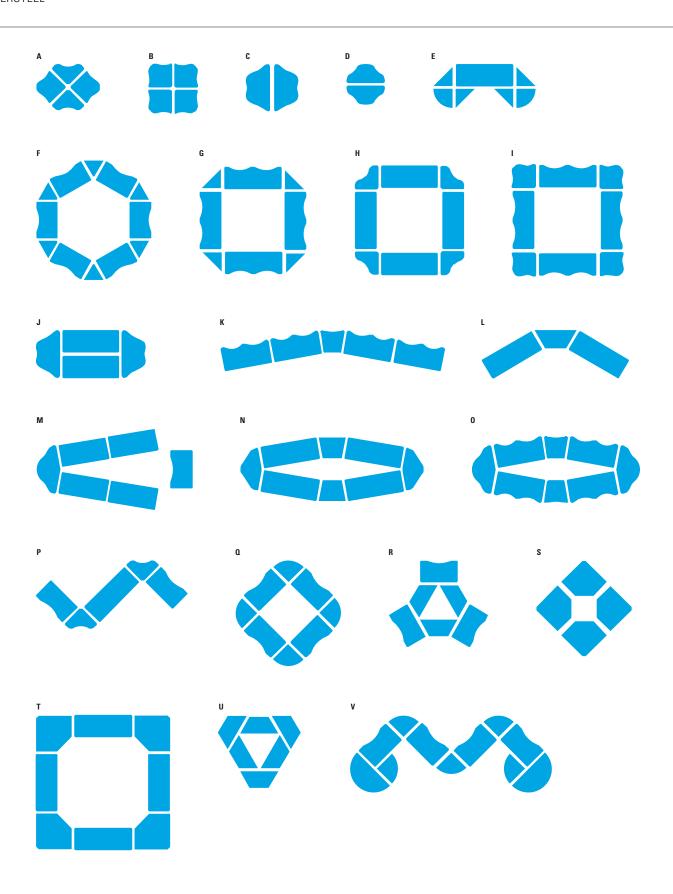

TIM Tilted & Nested




TIM on Table Transport




49 ³/8" high


TOD 20" x 60"

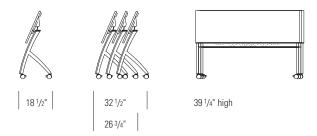

TOD 24" x 60"

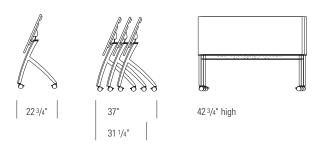

TOD 30" x 72"

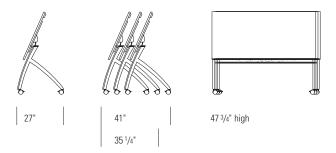

Fixed Configuration Conference Tops

Conference tops may use fixed configurations to achieve larger than normal sizing and seating accommodations, but there are some specific items that must be considered. These large conference tops are generally greater than 60" wide and 240" long.

By contacting Versteel with your vision we can help you engineer and produce your table. Below is a list of important points we will address.

MATERIAL YIELD

Most laminate is available in a maximum sheet size of 60" x 144". Versteel can design shapes and linking configurations that will maximize material yield.


LAMINATE PATTERNS

Versteel can minimize seam lines by designing and positioning the linking configuration to take full advantage of your laminate pattern.

BASES AND JOINTS

Larger sections can be produced to limit the number of bases and joints required.

At right is a typical Versteel drawing of a large, fixed configuration conference table. The extremely large size (504" x 132") required nine (9) sections and twenty-seven (27) bases. Power and data options have been incorporated into the drawing.

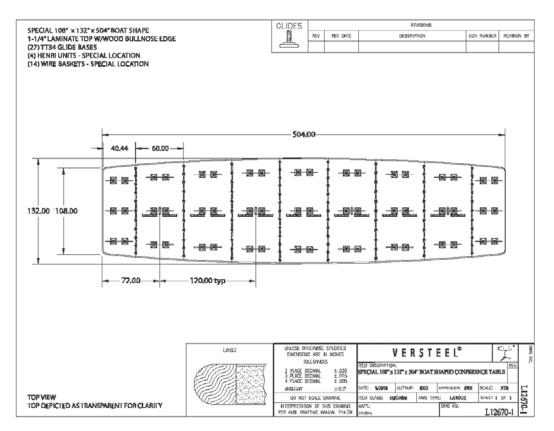

Configuration Guidelines

Often we receive requests to assemble room configurations that one would assume are very easy. But without the proper input, it is not so simple. Below are some common questions that will help to define your needs as well as enable us to help you specify your tables.

Define Your Space

Start by asking yourself what you really want to accomplish in your room.

How will your room be used? Will you need breakout groups, is it a classroom with rows, or a boardroom? Do you need a T-shape, U-shape, or hollow square table group? Are there any special modifications that are specific to your application?

Besides the size of your room, here are some other items that you should take into consideration:

- ¬ instructor or speaker area
- ¬ wall with boards and/or audiovisual equipment
- ¬ door and window locations
- anything else which may interfere (columns, steps, ramps, HVAC, etc,)

Define Your Needs

Your table considerations should begin by thinking about the need for the following items:

- ¬ modesty panels
- ¬ linking
- ¬ power and data
- ¬ wire management and grommets
- ¬ keyboard trays
- \neg fixed, folding or tilt bases
- ¬ special needs (alternate or adjustable height)

Your seating considerations should begin by thinking about the need for the following items:

- ¬ assume a 30" width per person
- ¬ mobility (casters)
- ¬ stacking or storage issues
- ¬ usage and wear (upholstery or wood)
- ¬ adjustable height
- ¬ function (task specific or multiple)

The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Common Room Layout Guidelines

By using the guidelines below and the information that you supply (from answering the previous questions), Versteel can help you specify the tables and seating you need to make your space function at its maximum potential.

Between Rows Allow Four Feet (4')

If rows are used, four feet (4') between rows is considered adequate in order to provide space for movement

Instructor Allowance of Eight - Ten Feet (8'-10')

A minimum of eight to ten feet (8' -10') should be allowed for the instructor's space, from the wall to the approach side of the first table row.

Back Wall Allowance of Seven Feet (7')

Space consideration for the back wall is necessary. A minimum of seven feet (7') from the back wall to the user's side of the last table is suggested.


Side Wall Allowance of Four Feet (4')

A minimum of four feet (4') from a side wall to the edge of a table should be incorporated into your configuration. Increase the distance for larger rooms.

Aisle Allowance of Four Feet (4')

If an aisle is needed, allow a minimum of four feet (4'). This dimension should increase with your room size.

The drawing below illustrates the guidelines above.

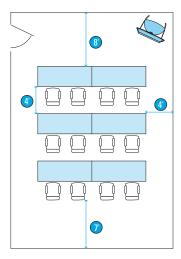

The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Reference information here originally appeared in Architectural Graphic Standards, published by John Wiley and Sons; and in US Government publications for compliance with the ADA (Americans with Disabilities Act).

Also, be sure to check US Government publications for compliance with the ADA (Americans with Disabilities Act).

Common Seating Dimension Requirements

General spacing of thirty inches (30") of lateral space per chair at a table is standard. A minimum of twenty-four inches (24") may work, but will depend upon your chair style and table dimensions. Allow a minimum of thirty to thirty-six inches (30"-36") for wheelchair space at a table.

Most wheelchairs are designed to fit beneath a standard table with a twenty-nine inch (29") table top height. However, some wheelchairs require tables with tops at thirty-two inches (32") in height. Allow an additional twelve to eighteen inches (12"-18") in aisles where wheelchairs may be situated back to back.

A rule of thumb for cafeteria style seating is to allow a minimum of twelve square feet (12 ft^2) for each seat.

Below

- A Wheelchair, Double Passage
- **B** Wheelchair, Single Passage
- **C** Wheelchair, Turning Diameter






Table Seating Capacities by Size and Shape

Rectangular Tables

| SIZE | CHAIRS | WHEELCHAIRS |
|-----------|--------|-----------------|
| 24" x 48" | 4 | Not Recommended |
| 30" x 48" | 4 | 2 |
| 30" x 60" | 4-6 | 4 |
| 36" x 72" | 4-6 | 4-6 |
| 42" x 96" | 6-8 | 8 |
| | | |

Square Tables


| SIZE | CHAIRS | WHEELCHAIRS |
|-----------|--------|-----------------|
| 30" x 30" | 2 | Not Recommended |
| 36" x 36" | 2-4 | Not Recommended |
| 42" x 42" | 4 | 2 (tight) |
| 48" x 48" | 4-8 | 2 |
| 54" x 54" | 4-8 | 4 |
| 60" x 60" | 4-8 | 4 |

NOTE

A round table with a column base is often preferred for wheelchair disabled

Round Tables

| SIZE | CHAIRS | WHEELCHAIRS |
|--------------|--------|-----------------|
| 30" DIAMETER | 2 | Not Recommended |
| 36" DIAMETER | 2-4 | Not Recommended |
| 42" DIAMETER | 4-5 | Not Recommended |
| 48" DIAMETER | 5-6 | 2 |
| 54" DIAMETER | 6-7 | 4 |

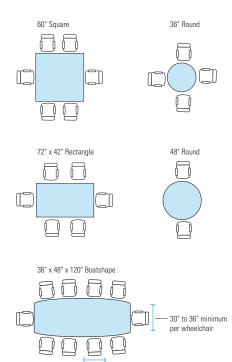


24" to 30" minimum per chair The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Also, be sure to check
US Government
publications for
compliance with the
ADA (Americans
with Disabilities Act).

Minimum Table and Chair Space Allotments

Below

- A 36" minimum, 44" preferred
 - 54" minimum handicapped, 60" preferred
- **B** 24" minimum
- C 24" minimum per chair, 30" preferred
- **D** 14" minimum




Dining Room Plan

Below

- A 6" minimum (with no passage)
- **B** 2'6" to 3' minimum (for passage)
- C 1'6" minimum (for limited passage)
- **D** 3' minimum

If using square tables and seating, there should be a minimum of sixty-six inches (66") between tables. This allows for a thirty inch (30") aisle and two (2) chairs. Diagonal seating requires a thirty-six inch (36") minimum between table corners.

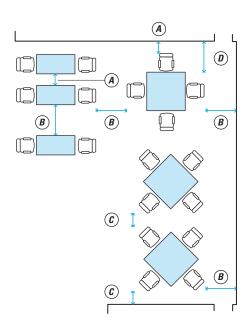


Sample Space Use

Below

- A Conference Room
- **B** Small Team Planning
- C Large Team Planning
- **D** Round Table Discussion
- E Individual Work Areas
- **F** Breakout Areas

Since every space has its own unique size and function, it is important that you consider the aforementioned guidelines when planning your space. Be sure to allow adequate space for aisles and plan your rooms around walls and other permanent fixtures such as doors or windows. Anticipate the type of activity that will be going on and plan enough space at the table for easy movement of personnel when seated.

Don't forget to consider power and data needs also. For help planning and selecting the power and data options that are right for your space, see pages 55-70.

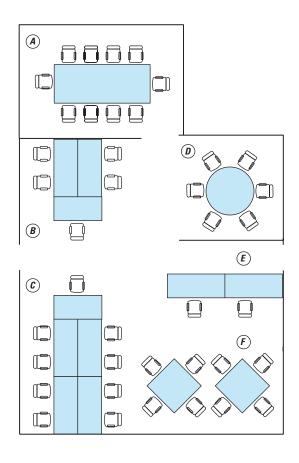

To Order, Specify...


- 1 Model Number, Include top and edge style
- 7 Top Material
 - a. Laminate
 - 1. Laminate manufacturer and color
 - b. Veneer
 - 1. Veneer species and finish color
 - c. Corian®
 - 1. Corian® color
- 3 Edge color or finish
- 4 Base color
- 6 Additional options



A VTTC 2460REFD FM LP2R is a Vela series 24" x 60" rectangle training table with folding TC bases, a folding modesty and a laminate $1\ \ensuremath{\ensuremath{\,\%}}$ " thick top with a PVC edge and radius corners.

The codes TN S 6001-T / CEBO / PALY specify a Nevamar S 6001-T laminate, Ebony PVC edge and an Alloy base.

BMV/TLL/PHE/WML PALY adds a mix of Vela wheel casters and glides, a lightweight laminate core, 2 Henris installed in location E and a pair of wire mesh legways in Alloy finish.

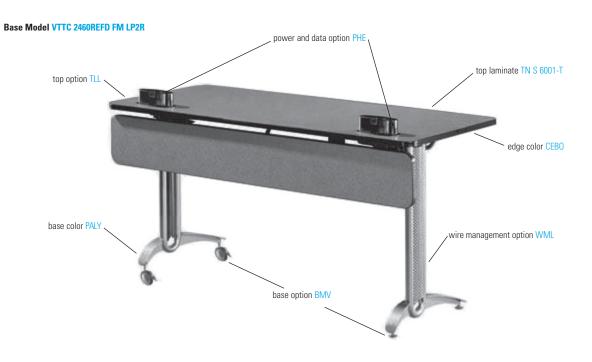

Sample Order Form

| Quantity | Model # & Description | List Each | Extended List |
|----------|--|-----------|----------------------|
| 21 | VTTC 2460REFD FM LP2R / TN S 6001-T / CEBO / PALY / BMV / TLL / WML PALY Vela series 24" x 60" rectangle training table, folding cantilevered bases, folding modesty panel, laminate top with flat PVC edge, 1 ½" thick and radius corners / Nevamar S 6001-T laminate top / Ebony PVC edge / Alloy bases / mix of casters and glides / lightweight core / Alloy wire mesh legways | \$2,464 | \$51,744 |

Orders may be sent via:

CONTACT VERSTEEL

EMAIL contact@versteel.com MAILING ADDRESS TELEPHONE 800 876 2120 Versteel 2332 Cathy Lane 812 634 2120 812 482 9318 Jasper, IN 47546 FACSIMILE

Studio Steel®

Versteel's "urban fabrication" process leaves the telltale signs of welding and assembly on the surface, highlighting a manufacturing aesthetic. Choosing a clear or transparent powder coat is recommended, allowing tonal striations (created as a result of extreme heat), natural textures, and the inherent qualities of raw steel to show through.

Studio Steel Process.....\$147

Powder Coat Finishes

All powder coat finishes in the Versteel offering have been formulated with the use of epoxy, polyester or epoxy and polyester blends to maximize the finish durability.

Powder Coat Finish Options

| Powder Coat - Standard | n/c |
|------------------------|--------|
| Powder Coat - Premium | \$147* |

Powder Coat Colors

| Alloy | PALY | Navy | PNAV |
|----------------|------|-------------|-----------|
| Amethyst | PAME | Nimbus | PNIM |
| Anthracite | PANT | Nutmeg | PNUT |
| Black Anodized | PBLA | Obsidian | POBS |
| Bronze | PBRO | Pacific | PPAC |
| Calypso | PCAL | Pearl | . . PPEA |
| Carbon | PCAR | Pebble | PPEB |
| Champagne | PCHA | Platinum | PPLA |
| Coconut | PCOC | Рорру | PPOP |
| ♦ Copper | PCOP | Raven | PRAV |
| Crimson | PCRI | Royal | PROY |
| ♦ Crystal | PCRY | ♦ Satin | ..PSAT |
| Daffodil | PDAF | Seaside | ..PSEA |
| Ebony | PEBO | Shipyard | PSHI |
| Forest | PFOR | Silver | PSIL |
| Fossil | PFOS | Snow | PSNO |
| ♦ Garnet | PGAR | Stone | PST0 |
| ♦ Gold | PGOL | Storm | PSTM |
| Graphite | PGRA | Terra Cotta | PTEC |
| ● Hope | PHOP | Whisper | PWHI |
| Kelly Green | PKEG | White Linen | PWHL |
| ♦ Matte | PMAT | Powder Coat | |
| Mica | PMIC | Alternative | OPA |
| Mint | PMNT | | |

^{*}Platinum Powder Coat is available, see individual series for upcharge

Transparent Powder Coats (indicated by �)

Please note that the transparent characteristics of these powders allow all natural welds and textures inherent to raw steel to be visible. Not available for application on flat sheet metal surfaces found on Elements Conference, Entourage, Interplay, Platform, Form Modesty products or on Brattice disc bases and TOD.

Premium Powder Coats (indicated by (2))

Versteel's premium process uses specially formulated powder coats for a truly unique color palette.

Powder Coat Alternatives

You must forward a color sample or an RAL number for each alternate powder coat color with order placement. Call Versteel Customer Service for pricing and availability.

NOTE ALTERNATIVE POWDER COAT COLOR APPROVAL MAY AFFECT STANDARD PRODUCTION SCHEDULES

Chrome

Versteel applies a deep luster nickel chrome plated finish available on most products. Chrome is the most durable finish available.

Chrome. ECHR

For Chrome, an upcharge applies (see product price list for upcharge).

NOTE DISC BASES, INTERPLAY, ODIS, PLATFORM, THE MAKER PROJECT AND VELA PRODUCTS ARE NOT AVAILABLE IN CHROME

Nicke

NOTE DISC BASES, INTERPLAY, ODIS, PLATFORM, THE MAKER PROJECT, TOD AND VELA PRODUCTS ARE NOT AVAILABLE IN NICKEL

Edges

Versteel table edges are available in a variety of standard materials, from PVC, Urethane, and T-mold, to wood.

- \neg PVC provides hot melt applied in a continuous band around the surface.
- ¬ Reverse bevel acrylic edge banding is hot melt banded to MDF core.
- ¬ Urethane is a molded on material encapsulating the surface edge.
- ¬ Convex T-mold is a bumper edge driven into the surface grooved edge.
- ¬ Wood banding is a multi-ply wood band or miter-cornered solid in cherry, maple or walnut.
- ABS is an available alternate edge similar to PVC.
 Call Versteel Customer Service for pricing and availability.

Edge Colors, Codes & Availability

| Color | PVC | Urethane | T-mold |
|--------------------------------|---------|----------|--------|
| Absolute Acajou | . CABA | | |
| Alloy | . CALY | | |
| Carbon | . CCAR | | |
| Champagne | . CCHA | | |
| Chicory | | UCHI | |
| ${\sf Coconut} \ldots \ldots$ | . CCOC | | |
| Ebony | . CEBO | UEBO | TEB0 |
| ${\sf Florence\ Walnut\ .\ .}$ | . CFLW | | |
| Fossil | . CFOS | | |
| Graphite | . CGRA. | UGRA | TGRA |
| Grey | . CGRE | | |
| $Kensington\ Maple.$ | . CKEM | | |
| Nimbus | . CNIM. | UNIM | TNIM |
| Pearl | . CPEA | | |
| Platinum | . CPLA | | |
| $Pralines\ \&\ Cream.\ .$ | . CPRC | | |
| Shadow | . CSHA | | |
| Snow | . CSNO | | |
| Stone | . CSTO | | |
| Storm | . CSTM | USTM | TSTM |
| Whisper | . CWHI | | |
| White Linen | . CWHL | | |

Custom PVC Color Match

You must forward a sample for each PVC color match with order placement. A color matched sample will be provided for approval.

NOTE CUSTOM PVC COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Custom T-Mold Color Match

You must forward a sample for each t-mold color match with order placement. A color matched sample will be provided for approval.

NOTE CUSTOM T-MOLD COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Resin Edge Material Alternatives

For resin edge material alternatives contact Versteel Customer Service with the specifications of the materials you would like to specify. Resin edges are available in gloss, satin or satin soft materials and are quoted per project.

NOTE RESIN EDGE MATERIAL ALTERNATIVES WILL BE QUOTED PRODUCTION SCHEDULES BASED ON DETAIL

Custom Urethane

You must forward a sample for each Urethane color match with order placement. A color matched sample will be provided for approval.

NOTE CUSTOM URETHANE COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Veneer & Wood Species

Versteel tables are available with standard Ash, Cherry, Maple and Walnut veneers and solid edges.

Veneer and Wood Finishes

| Ash | Veneer Edge | Wood Edge |
|--------------------|-------------|-----------|
| Beach | VBEA | WBEA |
| Chestnut | VCHE | WCHE |
| Drift | VDRI | WDRI |
| Fawn | VFAW | WFAW |
| Fog | VFOG | WFOG |
| Pebble | | |
| Whisper | VWHI | WWHI |
| Cherry | | |
| Blossom Cherry | VBLC | WBLC |
| Cordovan Cherry | VCNC | WCNC |
| Golden Cherry | VGNC | WGNC |
| Java Cherry | VJAC | WJAC |
| Millwork Cherry | VMWC | WMWC |
| Maple | | |
| Caramel Maple | VCMM | WCMM |
| Solar Maple | VSLM | WSLM |
| Sugar Maple | VSUM | WSUM |
| Walnut | | |
| Brighton Walnut | VBRW | WBRW |
| Espresso Walnut | VESW | WESW |
| Natural Walnut | | |
| Stain Finish Match | | OSM |

Veneer or Wood Edge Alternatives

For veneer or wood edge requirements other than our standard sliced Ash, Cherry, Maple or Walnut, contact Versteel Customer Service with the specifications of the materials you would like to specify.

NOTE VENEER OR WOOD EDGE ALTERNATIVES APPROVAL MAY AFFECT STANDARD PRODUCTION SCHEDULES

Stain Finish Match

You must forward two 4" x 4" samples for each custom stain finish color match with order placement. Upcharge of \$894 list will apply for each stain color match.

NOTE STAIN FINISH MATCH COLOR APPROVAL MAY AFFECT STANDARD PRODUCTION SCHEDULES

Wood Finish Alternatives

Versteel finish has a natural grain fill level finish appearance, contact Versteel Customer Service for alternative fill levels (Oak veneer's natural pore grain does not allow the application of a full-fill finish). Coarse grain will require additional application steps for a full-fill grain appearance and will require a quote.

NOTE WOOD FINISH ALTERNATIVE APPROVAL MAY AFFECT STANDARD PRODUCTION SCHEDULES

Standard Laminates

Versteel's standard offering of laminates includes over 900 laminates from Wilsonart, Formica, Nevamar and Pionite. Eight (8) of these have been selected as

Laminate manufacturers change standard offerings frequently, and it is possible that a standard product can become unavailable. Versteel cannot be responsible for any inconvenience this may cause.

NOTE NEVAMAR AND PIONITE LAMINATE NOT AVAILABLE ON ODIS

Glass Top Table Alternatives

For glass top table alternatives contact Versteel Customer Service with the specifications of the top you would like to order.

NOTE GLASS TOP TABLE ALTERNATIVES WILL BE QUOTED PRODUCTION SCHEDULES BASED ON DETAIL

Finish Reference & Samples

For finish color reference, please refer to Versteel's finish card. Contact Versteel to receive actual color samples for color matches and final color approval.

3form® Material

Available on Entourage lectern, cabinet and wall board. Standard 3form patterns are Solo (a grainless frost finish) and Aero (a random directional material also with a frost finish). The material is 1/46" thick and incorporates raw materials made of renewable material from natural landscapes all over the globe. The manufacturing process produces no VOC's or other harmful gases. 3form material is GREENGUARD Certified.

Tack Panel VERSTEEL

| Upho | Istery | Grades |
|------|--------|--------|
|------|--------|--------|

Grade 2 Grade 3 Grade 4 Grade 5 Grade 6 Fedora Cover Cloth Faux Mo Fabric Grade-In Fabric Grade-In Fabric Grade-In Faux Felt Oath Customer's Own Material Fabric Grade-In Flock Hobnob Keynote Kit Odessa Polygon Solitaire Sport Synergy Fabric Grade-In

Upholstery Details

QS Fedora (Mayer)...... FFE_ Grade 2

Width 54" Content: 100% Polyester

Plum Aegean Eucalyptus Aquamarine Fawn Purple Bitumen Indigo Rubv Cactus Light Grey Tangelo Charcoal Midnight Tomato Citron Mink Topaz Dapper Opal Winter Persimmon Dew Espresso Pewter

Fabric Grade-In FG2_ Grade 2

Fabric Customer's Own Material FCM Grade 2

Cover Cloth (Momentum)..... FCL__ Grade 3

Width: 59" Content: 100% Polyester
Antique Graphite

Savor Bouquet Heirloom Shire Coffee Hickory Sorrel Cyan Indigo Taiga Delft Jet Taupe Electric Navel Vesper Flame 0at Vessel Fuchsia Platinum Zest

Faux Felt (Momentum)..... FFF_ Grade 3

Width 54" Content: 62% Repreve® Post-Consumer Recycled Polyester, 38% Polyester

Bark Graphite Quail
Berry Lagoon Sprout
Camel Path Stone
Charcoal Pebble Vibrant
Coral Pool

Flannel Pumice

Flock (Momentum) FFL_ Grade 3

Width 56" Content: 53% Recycled Polyester, 47% Polyester

Agave Flint Nickel Amber Harbor Paprika Baltic Harp Ruby Cayman Hearth Surf Crocus Twine Heather Demure Walnut lvy Dusk Lapis Wheat Fern Nautical Flannel Nettle

Hobnob (Momentum) FHO_ Grade 3

Width 56" Content: 51% Recycled Polyester, 49% Polyester

Shale Adobe Deck Alarm Depth Smith Armor Dew Tangelo Teal Ash Forest Bay Ginger Tide Beyond Henna Timber Cannon Iris Zebra Limon Carbon Carob Maple

Keynote (Momentum)..... FKE_ Grade 3

Width 54" Content: 100% Repreve® Post Consumer Recycled Polyester

Aquarian Linen Sangria
Chai Menthe Simmer
Chicory Mesa Wicker
Curry Palmetto

Granite Reflect

Width 54" Content: 57% Recycled Polyester, 43% Polyester

Aqua Ebony Paradise
Blazer Fiesta Pebble
Dover Mocha Quartz
Dune Moonstone
Earth Pacific

Odessa (Mayer) FOD_ Grade 3

Width 54" Content: 64% Acrylic, 36% Polyester

Bark Mandarin Ruby
Grass Marigold Sea
Gravel Oyster Turquoise
Indigo

Polygon (Mayer) FPO_ Grade 3

Width 54" Content: 60% Post-Consumer Recycled Polyester, 40% Rayon

Citron Navy Sable
Grass Ocean Smoke
Jute Onyx Stone
Mulberry

Solitaire (Momentum) FSL_ Grade 3

Width 57" Content: 50% Repreve® Post Consumer Recycled Polyester, 50% Polyester

Aztec Galena Onyx Cadet Garnet Peel Currant Graphite Рорру Cyan Griffin **Pumice** Derby Jubilee Smith Dove Lapis Tinsel Emerald Midnight Tobacco Flax Mist Violet

Sport (Momentum) FSP__ Grade 3

Width 56" Content: 98% Post Consumer Recycled Polyester, 2% Polyester

Alarm Curry Pewter Aloe Dayglow Port Apple Downpour Pumice Brick Flax Sage Cadet Koi Spa Cobalt Mercury Turquoise Cocoa Onyx

Synergy (Momentum)..... FSN_ Grade 3

Width 53" Content: 71% Repreve® Post Consumer Recycled Polyester, 29% Polyester

Aegean Denim Sandstone
Balsamic Lichen Seaglass
Barley Meadow Tango
Bedrock Otter
Carbon Pecan

Fabric Grade-In FG3__ Grade 3

Faux Mo (Momentum) FFM_Grade 4

Width 55" Content: 58% Repreve® Post Consumer Recycled Polyester, 42% Polyester

Bark Moss Rust Black Nickel Sapphire Charcoal 0at Shadow Crimson Ochre Shale Delta Path Shell Persimmon Sienna Grass Lapis Pine Sky Limon Poppy Spa Marine Putty Stone Ruby Wheat Merlot

Oath (Momentum) FOA_Grade 4

Width 55" Content: 50% Repreve® Post Consumer Recycled Polyester, 50% Polyester

Anise Chocolate Lodestone Azure Cordovan Madder Balsam Crocus Mineral Burlwood Driftwood Nectar Cane Sandbar Ecru Carnelian Fieldstone Tango Celadon Foothill Taupe Charcoal Juniper Verbena

Fabric Grade-In FG5_ Grade 5

Swatch cards for all Versteel upholstery are available upon request.

Fabric Reference & Samples

For fabric reference, please refer to Versteel's fabric cards.

MOMENTUM TEXTILES



Study Carrel Tack Panel COM Yardage Requirements

COM yardage requirement of one yard of fabric for each Study Carrel tack panel is based on a material width of 54" with no consideration for repeat. For material other than 54" wide, contact Versteel for yardage requirements.

NOTE ALL FABRICS ARE CUT UP THE ROLL TO MAXIMIZE YIELD AND WEAR PERFORMANCE.

CONTACT VERSTEEL CUSTOMER SERVICE FOR YARDAGE REQUIREMENTS IF RAILROADED FABRIC

OR SAME CENTER POINT IS REQUIRED.



Height

Adjustable Height - Motorized \$2161 / table

AVAILABLE ON VFLA

Specify code BAM (Adjustable Height - Motorized), add \$2161.00 list per table

Motorized tables adjust electrically from 26 3/4" to 42" table height by operating the keypad control. Motorized height adjustment is available for tables with regular T1 or cantilevered TC bases. Top shapes include: rectangle, split rectangle, oval, split ellipse, boatshape or racetrack up to 36" x 96". (Shown with split ellipse.) Motorized bases include stretcher rails.

NOTE CABLE COIL AND CABLE HOOKS ARE THE ONLY TWO LEGWAY OPTIONS AVAILABLE

ADJUSTABILITY WITH FOUR PROGRAMMABLE HEIGHT SETTINGS

(Travel time between lowest and highest position: 18 secs.)

NOTE REQUIRES STANDARD 110/120V AC ELECTRICAL OUTLET

Adjustable Height - Pin \$198 / table

AVAILABLE ON WAVELINK Specify code BAP (Adjustable Height - Pin), add \$198.00 list per table or \$101.00 per base

Pin Adjustable height bases adjust from 27" to 32" table height in 1" increments by depressing the spring loaded pins in each column. Available on Performance T1 and TC fixed or tilt bases and Wavelink WA fixed bases.

Adjustable Height - Counter Balance Pneumatic T Base, Cantilever Base and H Base

AVAILABLE ON

See pages 556-559 for detailed availability and pricing

Counter balance pneumatic adjustable height bases are only available on a square or radius foot with a rectangle top. They are only available in an Ebony finish.



Adjustment Range: 19.5" Table Height: 27 1/4"-46 3/4"

Adjustable Height - Crank T Base

AVAILABLE ON

See pages 554-555 for detailed availability and pricing

Crank adjustable height bases are only available on a square or radius foot with a rectangle top. They are only available in an Ebony finish.





Adjustable Height - Pneumatic T1 or TC Bases \$1102 / table

AVAILABLE ON PERFORMANCE

Specify code BAT (Adjustable Height - Pneumatic T1 or TC), add \$1102.00 list per table

Pneumatic adjustable height bases cover the most common ergonomic table heights of 26 3/4", 29" and 32" with a simple turn of a handwheel. Pneumatic height bases are designed for field serviceability, if ever needed. Available on T1 or TC fixed or tilt bases.



ADJUSTABILITY WITH THREE PRESET TABLE HEIGHT STOPS

TYPING HEIGHT 26 3/4" 29" STANDARD HEIGHT 32" WHEEL CHAIR HEIGHT

NOTE FOR OTHER TABLE HEIGHT REQUIREMENTS CONTACT VERSTEEL FOR STRUCTURAL DETAILS, PRICING AND AVAILABILITY **ALSO** VELA WIRE MESH LEGWAY MANAGERS ARE NOT AVAILABLE

Adjustable Height - Pneumatic X1 or D1 Bases \$662 / table

AVAILABLE ON PERFORMANCE VFI A

Specify code BAX (Adjustable Height - Pneumatic X1 or D1), add \$662.00 list per table or base

Pneumatic adjustable height bases cover the most common ergonomic table heights of 26 3/4", 29" and 32" with a simple turn of a handwheel. Pneumatic height bases are designed for field serviceability, if ever needed, Available on X1 or D1 fixed or tilt



ADJUSTABILITY WITH THREE PRESET TABLE HEIGHT STOPS

TYPING HEIGHT 26 3/4" STANDARD HEIGHT 29" WHEELCHAIR HEIGHT 32"

NOTE FOR OTHER TABLE HEIGHT REQUIREMENTS CONTACT VERSTEEL FOR STRUCTURAL DETAILS, PRICING AND AVAILABILITY

Alternate Table Height 32" and under \$89 / table

AVAILABLE ON INTERPLAY PLATFORM VFI A WAVELINK

Specify code BAH (Alternate Height 32" and under), indicate desired table height (32" or less), add \$89.00 list per table

Suggested typing height table is 26 3/4" Suggested wheelchair height table is 32" Suggested stand up height table is 42"

NOTE FOR ALTERNATE HEIGHTS OVER 32", CONTACT VERSTEEL FOR STRUCTURAL DETAILS, PRICING AND AVAILABILITY.

NOTE ELIGA \$159 LIST (T BASE TABLES)

No Charge

Alternate Black Caster

AVAILABLE ON ENTOURAGE EQUIP

VFRSTFFI

Specify code **CAS44** (Alternate Black Caster) no additional charge

Available on all Entourage units that have casters (carts, lecterns, 48" and 60" cabinets) where the standard soft wheel two-tone silver/black caster is replaced with an all black caster. This 3" diameter caster is standard locking and does not change the overall height of the unit.



Base Glides Subtract \$30

AVAILABLE ON

Specify code GLD02 (Glides), subtract \$30.00 list per table

Base Glides replace standard casters. This option reduces the overall table cost and keeps the tables in position without the need to lock the casters. Base glides reduce the overall table height by 1/16".



Casters - Dual Wheel

Dual Wheel, black, 2" diameter, standard locking casters are available for most base styles. Each is fitted into a reinforced caster receiver and must be specified at time of order. Caster option does not change the overall height of the table. See individual product pages for availability and ordering code.



NOTE NOT AVAILABLE ON D1 BASES

Casters - Vela Wheel \$153 / set of 4

AVAILABLE ON

Specify code CAS29 (Casters - Vela Wheel), add \$153.00 list per table

Unique, Vela-profile 3" diameter, standard locking casters are available on most Interplay and Vela base styles. Each is fitted into a reinforced caster receiver and must be specified at time of order. Caster option does not change the overall height of the table.



Mix - Dual Wheel Casters & Glides \$145 / table

AVAILABLE ON BRATTICE PERFORMANCE TUSCANY UNO² Specify code BMD (Mix - Dual Wheel Casters & Glides), add \$145.00 list per table

Tables can be specified with dual wheel, black, 2" diameter, standard locking casters on half of the table, with glides on the other half. Each caster is fitted into a reinforced receiver and must be specified at time of order. Mix option does not change the overall height of the table.

NOTE NOT AVAILABLE ON X1, X4 OR D1 BASES

Mix - Vela Wheel Casters & Glides \$145 / table

AVAILABLE ON VELA

Specify code **BMV** (Mix - Vela Wheel Casters & Glides), add \$145.00 list per table

Tables can be specified with the unique, Vela-profile 3" diameter, standard locking casters on half of the table, with glides on the other half. Each is fitted into a reinforced caster receiver and must be specified at time of order. Mix option does not change the overall height of the table.

NOTE NOT AVAILABLE ON X1, X4 OR Y3 BASES

Self-Leveling Glides \$43 / table

Specify code **GLD04** (Self-Leveling Glides), add \$43.00 list per table

Self-Leveling Glides replace standard glides. This option allows the table to automatically compensate up to ½" for floors that are not level. Self-leveling glides increase overall table height by ¾". See individual product pages for availability.



Table Floor Mount \$50 / table

AVAILABLE ON BRATTICE PERFORMANCE TUSCANY UNO² VELA WAVELINK Specify code ${\it BFB}$ (Table Floor Mount Bracket Set), add \$50.00 list per table

Bracket to slip over the standard table glide and fasten to the floor with fasteners supplied by the installer. Set of four (4) brackets will securely mount the table to the floor to prevent movement



NOTE NOT AVAILABLE ON BASES WITH CASTERS OR SELF-LEVELING GLIDES

Finishes & Function VFRSTFFI

Chrome Finish

AVAILABLE ON PERFORMANCE TOD WAVELINK

See individual series for availability and pricing.

Pricing for all tables includes standard powder coat colors.

NOTE DISC BASES, INTERPLAY, ODIS, PLATFORM AND VELA PRODUCTS ARE NOT AVAILABLE IN CHROME

Nickel Finish \$200 / table

AVAILABLE ON BRATTICE PACES PERFORMANCE TIM WAVFLINK

Specify Nickel Finish, add \$200.00 list per table

Pricing for all tables includes standard powder coat colors.

NOTE DISC BASES, INTERPLAY, ODIS, PLATFORM, TOD AND VELA PRODUCTS ARE NOT AVAILABLE IN NICKEL

Premium Powder Coats \$147 / table

AVAILABLE ON

When a premium powder coat is specified, add \$147.00 list per

Pricing for all tables includes standard powder coat colors.

NOTE PLATINUM UPCHARGE VARIES, SEE INDIVIDUAL PRODUCT PAGES.

Coloration No Charge

AVAILABLE ON

Specify code **BCO** (Coloration), required finish selection for: (Tuscany Two-Tone) the column ___ / the base rail _

The unique construction and assembly of the Tuscany bases allows different colors to be applied to different base components at no additional charge.



NOTE REFER TO THE DRAWING ABOVE FOR LABELING REFERENCES

Assembled Folding Table \$69 / table

AVAILABLE ON BRATTICE PERFORMANCE TUSCANY UNO² VELA WAVFLINK Specify code BAF (Assembled Folding Table), add \$69.00 list per table

Folding bases can be attached to tops at the factory.

NOTE RECTANGLE TABLES WITH FOLDING BASE AND FOLDING MODESTY PANELS ARE SHIPPED ASSEMBLED WITHOUT ADDITIONAL CHARGE



Bullet End Caps \$115 / table

AVAILABLE ON

Specify code BBE (Bullet End Caps), add \$115.00 list per table

Bullet End Caps are welded in place of the standard welded rail blunt ends.



Height Adjustment Lock Out Kit \$43 / kit

AVAILABLE ON

Specify code BHL (Height Adjustment Lock Out Kit), add \$43.00 list per table

All TIM tables have the height adjustment feature but can be locked into the desired height position easily. The Height Adjustment Lock Out Kit provides a stop and screw for each table leg. The stop fits into the round height position hole above or below the push-button and secures with the screw. The screw and stop can easily be removed to allow resetting table height as needed.



Stretcher Rail \$217

AVAILABLE ON PERFORMANCE

Specify code BSR (Stretcher Rail), required finish selection _, add \$217.00 list per table

Available for T1, TC and T2 style, fixed and tilt bases to increase table rigidity. Necessary tools are provided to install the stretcher.



NOTE A STRETCHER IS NOT A RETROFIT ITEM, IT MUST BE SPECIFIED AT TIME OF

Lightweight Laminate Core to 96" Length \$214 / table

AVAILABLE ON
BRATTICE
ELEMENTS CONFERENCE
PACES
PERFORMANCE
TY
UNO²
VELA
WAYELINK

Specify code **TLL** (Lightweight Laminate Core to 96" Length), add \$214.00 list per table

Lightweight Laminate Core is available for 1 $\frac{1}{4}$ " tops that are of a dimension no larger than 48" x 96". The core is made of a multi-ply material that will allow the mounting of bases or other accessories at any location under the top.

NOTE TOPS WITH LENGTHS LONGER THAN 96" REQUIRE A SPECIAL QUOTE. CONTACT VERSTEEL FOR PRICING AND AVAILABILITY

NOTE NOT AVAILABLE ON VENEER TOPS

Special Laminate Call for Quote

AVAILABLE ON
BRATTICE
ELEMENTS CONFERENCE
ELIGA
ENTOURAGE
INTERPLAY
ODIS
PACES
PERFORMANCE
PLATFORM
TOD
TY
UN09

Specify code **TSP** (Special Laminate), indicate the quoted charges per table

Special laminates and patterns can be specified as an option on Versteel products. To specify, contact Versteel for availability and pricing.

NOTE LAMINATES IN STANDARD COLORS AND TEXTURES FROM FORMICA, NEVAMAR, PIONITE, AND WILSONART ARE STANDARD

CAUTION Laminate manufacturers change standard offerings frequently, and it is possible that a standard product can become unavailable. Versteel cannot be responsible for any inconvenience this may cause

Two-Piece Top (120") \$564/ table

AVAILABLE ON BRATTICE ELEMENTS CONFERENCE ELIGA PACES CONFERENCE PERFORMANCE VELA Specify code T2P (Two-Piece Top), add \$564.00 list per table

Standard Versteel tables in lengths up to 120" are a seamless, single piece top. When the two-piece top option is specified, the splice joint edge is unfinished, table shipped with necessary hardware. Any table over 120" long will be produced as a two-piece top.

Ergo Wood Profile - One Side No Charge

AVAILABLE ON

Specify code **TEO** (Ergo Wood Profile - One Side), no additional charge

The Ergo Edge Profile is applied to the user's side of the table only, with flat banding on all additional sides.



Ergo Wood Profile - Two Sides No Charge

AVAILABLE ON VELA

Specify code **TET** (Ergo Wood Profile - Two Sides), no additional charge

The Ergo Edge Profile is applied to the user's and the opposite side of the table only, with flat banding on all additional sides.



Ergo Wood Profile - All Sides No Charge

AVAILABLE ON

Specify code **TEA** (Ergo Wood Profile - All Sides), no additional charge

The Ergo Edge Profile is applied to all sides of the table.







Manufacturer certifies that products meet applicable Underwriter's Laboratory and Intertek standards and testing.

Top Custom Cutout \$107 / cutout

AVAILABLE ON ALL SERIES Specify code TCC (Top Custom Cutout), add \$107.00 list per cutout

Top Custom Cutout requires a drawing for production and is subject to approvals.

Sail Modesty \$255 / each

AVAILABLE ON

Specify code MS__ (Sail Modesty), add \$255.00 list per table.

Lycra® fabric Sail Modesty is stretched and hooked on screw pegs under table top and slotted holes in the table approach side legs. All TIM tables are pre-drilled for field installation of the Sail Modesty. Sail Modesty is available in coordinating colors of Alabaster, Alloy, Ebon

in coordinating colors of Alabaster, Alloy, Ebony and Frost. Can be stored on table when tilted, nested or folded on table transport.

Panel Modesty, Laminate \$370 / each

AVAILABLE ON PACES TIM

Specify code MPL (Panel Modesty, Laminate), add \$370.00 list per table.

Panel Modesty, Laminate is specified with the table and the length and shape is determined by the table top selection of rectangle or arc rectangle. Inserts are included in the table top with hook brackets and handwheels factory installed. Panel is hung from hook brackets in the field after table set up. Panel Modesty finishes match table top finish selections. When table is tilted or nested the Panel Modesty tilts against the leg but must be removed when folded on the table transport.



Panel Modesty, Veneer \$917 / each

AVAILABLE ON PACES

Specify code MPV (Panel Modesty, Veneer), add \$917.00 list per table.

Panel Modesty, Veneer is specified with the table and the length and shape is determined by the table top selection of rectangle or arc rectangle. Inserts are included in the table top with hook brackets and handwheels factory installed. Panel is hung from hook brackets in the field after table set up. Panel Modesty finishes match table top finish selections. When table is tilted or nested the Panel Modesty tilts against the leg but must be removed when folded on the table transport.

Function & Linking VERSTEEL

Laptop Locker \$1235 / locker

AVAILABLE ON BRATTICE PERFORMANCE TY UNO² VELA

*Fixed tables only (not available on tilt, slim-tilt or folding tables)

Specify code **TLA1** (One Laptop Locker) or code **TLA2** (Two Laptop Lockers) add \$1235.00 list per Laptop Locker.

Indicate Manual Locking Keyed Individually TMKI, Manual Locking Keyed Alike TMKA or Electronic Locking TLEL. Add \$322 list per Laptop Locker when Electronic Locking is specified AND TLPU (Laptop Locker power unit) which is required for the electronic locking option, add \$509 list (Power unit sequences up to 10 lockers, includes 1 key).

The minimum table width available with Laptop Locker is 24"

The minimum table length available with Laptop Locker is 36". The maximum table length available is 96".



2 Laptop Lockers can be installed starting at a table length of 60° or greater (table subject to additional base and/or support base when more than one unit is installed in top greater than or equal to 72°).

All lockers to have urethane edge on locker door and top opening.

NOTE LAPTOP LOCKER IS NOT AVAILABLE ON VENEER TOP SURFACES,
WOODGRAIN OR DIRECTIONAL PATTERN LAMINATES OR TABLES WITH
LIGHTWEIGHT LAMINATE CORE

For additional questions contact Versteel Customer Service at 800 876 2120

Table Link \$225 / table

AVAILABLE ON
BRATTICE
ELIGA
PACES
PERFORMANCE
TIM
TOD
TY
UNO²
VELA

Specify code TLK (Table Link), add \$225.00 list per table

Table Link is for linking Versteel table configurations in typical room situations. Table link will prevent the accidental disconnection of power supply to adjacent tables. Available on tables with PVC. 3mm Wood.

Wood Square, Wood Fluted and Ergo user side edge details.

Closed end link brackets are provided for the following applications:

- Tops without bases.
- Tables with a base that does not allow the table to stand alone.



Table Link - Ends Only \$120 / table

AVAILABLE ON
BRATTICE
ELIGA
PACES
PERFORMANCE
TIM
TOD
TY
UNO²

Specify code **TLE** (Table Link - Ends Only), add \$120.00 list per table

Table Link is for linking Versteel table configurations in typical room situations. Specify Table Link - Ends Only when your configuration requires linking on the table ends only. Available on tables with PVC, 3mm Wood, Wood Square, Wood Fluted and Ergo user side edge details. Table Link - Ends Only is included with electrical package options. This will prevent the accidental disconnection of power supply to adjacent tables.

Leash - TIM Table Link \$85/table

AVAILABLE ON

Specify code TLS (TIM Table Leash), add \$85.00 list per table

The Leash table link is available on all TIM tables as a casual, quick link that simply holds the tables in position to each other. The Leash is mounted to the underside of the table top, rotating from under the top to latch into the adjacent table Leash.



Leash - Wavelink Table Link \$118 / table

AVAILABLE ON

Specify code TWL (Wavelink Table Leash), add \$118.00 list per table

The Leash table link is a casual, quick link that simply holds the tables in position to each other. The Leash is mounted to the W2 bases, rotating from under the table top to latch into the adjacent table leg Leash. Available on all linkable Wavelink tables.



NOTE CANNOT BE FIELD INSTALLED

Privacy Screen

AVAILABLE ON

Specify code **PSCR1S**, **PSCR1L**, **PSCR2S** or **PSCR2L** depending on material choice and size.

Privacy screens are available as an option to the Eliga Benching product and consists of ½" thick nominal panel running horizontal in the center of the table. The panel is 18" tall and sits 15.5" above the worksurface with a laser edge all around. Order privacy panel 12" shorter than the length of the table. One privacy panel per table.

Dry Erase Markerboard

| 36" - 48" (each)PSCR1S | \$ 471 |
|------------------------|-----------|
| 60" - 84" (each) | \$ 890 |

Available in all Formica solid laminate colors.

Rauvisio Crystal Markerboard

| 36" - 48" (each) | \$1838 |
|------------------|--------|
| 60" - 84" (each) | \$3417 |

Available in color Bianca.

These products can be written on with dry erase markers.

Form Modesty Panel End Cap Trim Kit \$46 / set of 2

AVAILABLE ON

Specify code **AFE2EB** (Form Modesty Panel End Cap Trim Kit), add \$46.00 list for set of 2

SPECIFICATIONS

- · Metal plate attached with screws
- Black powder coat finish
- Attached to back panel to close end of channels
- Set of 2 will cover both ends of a single or run of Form Modesty Panels



Metal Modesty Panel End Cap Trim Kit \$46 / set of 2

AVAILABLE ON FORM MODESTY SQUARE METAL MODESTY

Specify code **APE2EBSQ** for square powered modesty

Specify code **AFE2EBS0** for square non-powered modesty

Specify code **APE2EB** for form powered modesty

Specify code **AFE2EB** for form non-powered modesty



Storage Pouch - ODIS \$133 / pouch

AVAILABLE ON ODIS

Specify code AOPAY (Storage Pouch, Alloy) or AOPEB (Storage Pouch, Ebony), add \$133.00 list per pouch

Accessory Pouches are available on the 29" tall ODIS tables. The pouch which is made of a durable gray or black mesh material has a 2" opening, is 12" long and 6" deep. Files, folders, laptops and books can all be stored in the pouch. The \mathcal{W}_{let} solid wire frame is held in place by a solid aluminum extrusion. The frame and extrusion colors match the color of pouch specified. Since no tools are required for installation this item can be ordered with the table or may be ordered for field installation.

Acrylic Tray - Entourage Cabinet 48" Cabinet

AVAILABLE ON

Specify code **AAT480** (Acrylic Outer Tray - 48" Entourage Cabinet), add \$135.00 list each.

Specify code **AAT48C** (Acrylic Center Tray - 48" Entourage Cabinet), add \$150.00 list each.

60"/72" Cabinet

AVAILABLE ON

Specify code **AAT60** (Acrylic Tray - 60" Entourage Cabinet), add \$135.00 list each.

Specify code AAT72 (Acrylic Tray - 72" Entourage Cabinet), add \$150.00 list each.

NOTE CENTER ACCESS SHELF CAN ACCOMMODATE TWO TRAYS ON 60° AND 72° CABINETS

84" Cabinet

AVAILABLE ON

Specify code **AAT840** (Acrylic Outer Tray - 84" Entourage Cabinet), add \$150.00 list each.

Specify code **AAT84C** (Acrylic Center Tray - 84" Entourage Cabinet), add \$206.00 list each.

NOTE CENTER ACCESS SHELF CAN ACCOMMODATE TWO TRAYS ON 84" CABINETS

Acrylic Trays may be added to Entourage Cabinet Models.

Acrylic Tray - Entourage Cart 16" Wide Cart.

AVAILABLE ON ENTOURAGE

Specify code **AAT16** (Acrylic Tray - 16" Entourage Cart), add \$189.00 list each.

20" Wide Cart.

Specify code **AAT20** (Acrylic Tray - 20" Entourage Cart), add \$200.00 list each.

Acrylic Trays may be added to Entourage Carts.



Table Transports

Table Transport \$1666 / each

AVAILABLE ON BRATTICE PERFORMANCE VELA WAVELINK Specify code ATT3054 (Table Transport), add \$1666.00 list each

The transport saves time and labor. Its 31" width can move tables of any length through doorways with ease.



SPECIFICATIONS

- · Weight: 61 lbs.
- o 31" x 54" overall footprint
- · Black powder coat finish
- $\circ~$ Two (2) swivel and two (2) non-swivel casters
- $\circ~5$ " casters are non-marking wheel material

TRANSPORT CAPACITY

FOLDED TABLES WITHOUT MODESTY PANEL 8 STACKED FLAT FOLDED TABLES WITH MODESTY 5 STACKED FLAT OVERLAPPING FOLDED TABLES 4 ON EDGE

NOTE MAXIMUM LOAD WEIGHT: 1,000 LBS

NOTE TABLES GREATER THAN 27" IN WIDTH DO NOT STACK HORIZONTALLY ON THE TRANSPORT

Table Transport - TIM \$1666 / each

AVAILABLE ON TIM

Specify code **ATT3020** (Table Transport) for 42"-72" length tables, add \$1666.00 list each

The transport saves time and labor. Its 30" width can move tables of specified lengths through doorways with ease.

SPECIFICATIONS

- o Weight: 37 lbs.
- $^{\circ}~30$ " overall depth
- Alloy powder coat finish
- $\circ~$ Two (2) locking and two (2) non-locking casters
- Casters are non-marking wheel material

TRANSPORT CAPACITY

5 ON EDGE

FOLDED TABLES WITHOUT PANEL MODESTY OR FOLDED TABLES WITH SAIL MODESTY

NOTE MAXIMUM LOAD WEIGHT: 1,000 LBS

NOTE TABLE LEGS EXTENDED HIGHER THAN 29' STANDARD HEIGHT WILL NOT STORE ON THE TRANSPORT. THE LEGS WILL EXCEED THE TRANSPORT HEIGHT AND DRAG ON THE FLOOR WHEN BOLLING THE CART

Table Transport - ODIS \$596 / each

AVAILABLE ON

Specify code **ATT2824** (Table Transport - ODIS), add \$596.00 list each

Stacks 20 ODIS tables high. Cart with 20 tables measures approximately 28" w x 24" d x 50" h.

SPECIFICATIONS

- o Weight: 21 lbs.
- o 28" x 24" overall footprint
- · Alloy powder coat finish
- o Two (2) swivel, two (2) non-swivel casters
- o 5" casters are non-marking wheel material

Table Transport Handle & Strap - ODIS \$432 / each

AVAILABLE ON

Specify code **AOTTHS** (Table Transport Handle & Strap - ODIS), add \$432 list each

SPECIFICATIONS

 Table Transport Handle and Strap may be added to the Table Transport for ODIS to secure tables when using the cart on rough or incline surfaces.

Table Transport Tray - ODIS \$174 / each

AVAILABLE ON ODIS

Specify code **AOTTT1718** (Table Transport Tray - ODIS), add \$174.00 list each

Table Transport Tray may be added to the Table Transport for ODIS for the storage of the accessory pouch.



SPECIFICATIONS

- Weight: 13 lbs.
- ° 18" w x 20" l x 4" d
- Alloy powder coat finish

Table Transport - ODIS ADA \$849 / each

AVAILABLE ON

Specify code ATT3058 (Table Transport - ODIS ADA), add \$849.00 list each

Stacks 10 ODIS ADA tables high. Cart with 10 tables measures approximately $32\frac{1}{2}$ w x 58" d x 42" h



SPECIFICATIONS

- o Weight: 35 lbs.
- o 30" x 58" overall footprint (with handle)
- · Alloy powder coat finish
- o Two (2) swivel, two (2) non-swivel casters
- 5" casters are non-marking wheel material

Table Transport - ODIS Youth \$596 / each

AVAILABLE ON

Specify code **ATT2321** (Table Transport - ODIS Youth), add \$596.00 list each

Stacks 20 ODIS tables high. Cart with 20 tables measures approximately 23" w x 21" d x 44" h

SPECIFICATIONS

- o Weight: 19 lbs.
- o 23" x 21" overall footprint
- o Alloy powder coat finish
- o Two (2) swivel, two (2) non-swivel casters
- o 5" casters are non-marking wheel material



Custom PVC Color Match Call for quotation / one time charge per color, per order

Specify code OCP (Custom PVC Color Match), add cost from Versteel auotation

PVC Color Match can be the selection of a color that is available from a Versteel supplier or a new custom color developed for the order. Minimum footage requirements mean that the amount of material needed for your order will effect the cost

For PVC Color Matching you must supply a color reference sample. Versteel will review the sample for possible existing colors available and send a sample for customer approval. If no color match exists, a custom match will be developed and sampled for customer approval before a production schedule is established.

NOTE CUSTOM COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Custom T-Mold Color Match Call for quotation / one time charge per color, per order

Specify code OCT (Custom T-Mold Color Match), add cost from Versteel auotation

T-Mold Color Match can be the selection of a color that is available from a Versteel supplier or a new custom color developed for the order. Minimum footage requirements mean that the amount of material needed for your order will effect the cost

For T-Mold Color Matching you must supply a color reference sample. Versteel will review the sample for possible existing colors available and send a sample for customer approval. If no color match exists, a custom match will be developed and sampled for customer approval before a production schedule is established.

NOTE CUSTOM COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Powder Coat Alternative Call for quotation

Specify code **OPA** (Powder Coat Alternative), add cost from Versteel quotation

Powder Coat Alternative is available from Versteel. The entire RAL color reference along with hundreds of other colors and finishes are available.

For Powder Coat Alternative matching, you must supply a color reference sample, or an RAL number. Versteel will review the sample for possible existing colors available and send a sample for customer approval. If no color match exists, a custom match can be developed. Call Versteel Customer Service for associated upcharges on custom color development.

NOTE CUSTOM COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Stain Finish Match \$894 / one time charge per finish, per order

Specify code **OSM** (Stain Finish Match), add \$894.00 list per finish, per order

Alternative Stain Finishes are available for veneer and wood edged tops.

For Stain Finish Matching you must supply a 4" x 4" finish color and grain reference sample. An expertly finish matched sample will be provided for customer approval.

NOTE CUSTOM COLOR MATCHING APPROVALS MAY AFFECT STANDARD PRODUCTION SCHEDULES

Veneer and Wood Solids Alternative Call for quotation

For veneer and wood requirements other than the standard cherry, maple and walnut, contact Versteel Customer Service. Versteel is adept at working with a host of domestic and exotic materials. From inlays, figures, pie cuts and special edge profiles, to custom fill levels and sheens, each top is created using the best of technology and old world craftsmanship. The items you only imagined or expected to only be available from a millwork shop are now just another part of your Versteel order. Call Versteel Customer Service for availability and quotation.

Wood Finish Alternative Call for quotation

When veneer tables are required to have a finish other than the standard natural grain fill level finish appearance, semi-filled or full-filled finishes are available by requesting a quote from Versteel. Call Versteel Customer Service for availability and quotation.

Resin Edge Material Alternative Call for quotation

GLOSS

Seamless, rigid, blended resin edge with a hand polished high gloss finish.

SATIN

Seamless, semi-rigid, blended resin edge with a hand sanded satin finish. Scuffs, scratches and surface damage to the edge are field repairable.

SATIN-SOFT

Seamless, pliable, blended resin edge with a hand sanded finish. The features are memory and pliability. Scuffs, scratches and surface damage to the edge are field repairable.

Call Versteel Customer Service for availability and quotation.

Glass Top Table Alternative Call for quotation

Versteel glass top tables meet or exceed government specification DDG-451d, which regulates the quality standards of all glass manufacturing. This specification takes into consideration certain imperfections inherent in glass production. Call Versteel Customer Service for availability and quotation on series not priced with glass tops.

Henri (Custom) VFRSTFFI

Henri - \$308 / unit

Specify code PH_ (Henri - Location_), add \$308.00 list per Henri

The pop-up Henri electrical unit(s) is factory installed in the specified location. Perfect for single table applications.

SPECIFICATIONS

- o One 9' cord, one 15 amp circuit, standard grounded plug
- · Surge protection
- · Two electrical outlets per unit



NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

NOTE FOR HENRI VOICE AND DATA JACK OPTIONS SEE PAGE 50



1 Henri - Location A \$308 / table

Specify code PHA (1 Henri - Location A), add \$308.00 list per table

One pop-up Henri electrical unit is factory installed in the front center







1 Henri - Location F \$308 / table

1 Henri - Location K

Specify code PHF (1 Henri - Location F), add \$308.00 list per table

One pop-up Henri electrical unit is factory installed in the center of the top.



\$308 / table

Specify code PHK (1 Henri - Location K), add \$308.00 list per table

One pop-up Henri electrical unit is factory installed lengthwise in the center of the top.





1 Henri - Location R \$308 / table

Specify code PHR (1 Henri - Location R), add \$308.00 list per table

One pop-up Henri electrical unit is factory installed in a predetermined position in the top.





2 Henris - Location D \$616 / table

Specify code PHD (2 Henris - Location D), add \$616.00 list per table

Two pop-up Henri electrical units are factory installed in the front corner locations of the top.



NOTE LOCATION D HENRI UNITS NOT AVAILABLE ON 42" & 48" LENGTH TIM RECTANGLES AND ARC RECTANGLES



2 Henris - Location E \$616 / table

Specify code PHE (2 Henris - Location E), add \$616.00 list per table

Two pop-up Henri electrical units are factory installed in the front outer corner locations of the top.





\$616 / table

2 Henris - Location H

Specify code PHH (2 Henris - Location H), add \$616.00 list per table

Two pop-up Henri electrical units are factory installed in predetermined positions in the top.

Henri Now linking systems require an HNPU power supply unit per each sequence. Specify code HNPU, \$403.00 list each.

- o 120" cord length
- 15 amp circuit
- o standard grounded plug
- o surge protection



Henri Now - \$298 / unit

Specify code PHN_ (Henri Now - Location_), add \$298.00 list per Henri Now.

Table link - ends only is included with henri and powerlink electrical package options selection. The table link will prevent the accidental disconnection of power supply to adjacent tables The pop-up Henri Now electrical unit(s) is factory installed in the specified location. Recommended for multiple table applications. May be sequenced in any order.

SPECIFICATIONS

- o One 10' cord, one 15 amp circuit, standard grounded plug
- Surge protection
- o Two electrical outlets per unit



NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

NOTE FOR HENRI NOW VOICE AND DATA JACK OPTIONS SEE PAGE 50

NOTE HENRI NOW SOFT WIRED LINKED SYSTEMS DO NOT WORK WITH GFCI RECEPTACLES. CONTACT VERSTEEL FOR ADDITIONAL INFORMATION.



1 Henri Now - Location A \$298 / table

Specify code PHNA (1 Henri Now - Location A), add \$298.00 list per table

One pop-up Henri Now electrical unit is factory installed in the front center location of the top.





2 Henri Nows - Location D

Specify code PHND (2 Henri Nows - Location D), add \$596.00 list per table

Two pop-up Henri Now electrical units are factory installed in the front corner locations of the top.





1 Henri Now - Location F \$298 / table

Specify code PHNF (1 Henri Now - Location F), add \$298.00 list per table

One pop-up Henri Now electrical unit is factory installed in the center of the top.



2 Henri Nows - Location N \$596 / table

Location N

Specify code PHNN (2 Henri Nows - Location N), add \$596.00 list per table

Two pop-up Henri Now electrical units are factory installed in the front outer corner locations of the top.





1 Henri Now - Location K \$298 / table

Specify code PHNK (1 Henri Now - Location K),

add \$298.00 list per table

One pop-up Henri Now electrical unit is factory installed lengthwise in the center of the top.



2 Henri Nows - Location H \$596 / table

Specify code PHNH (2 Henri Nows - Location H), add \$596.00 list per table

Two pop-up Henri Now electrical units are factory installed in predetermined positions in the top.



1 Henri Now - Location R \$298 / table

Specify code PHNR (1 Henri Now - Location R), add \$298.00 list per table

One pop-up Henri Now electrical unit is factory installed in a predetermined position in the top.



Power Access VERSTEEL

Power Access

The flush mount Power Access unit(s) is factory installed in the worksurface. Indicate specified location on your purchase order.



SPECIFICATIONS

- ° Completely flush mounted in work surface
- o Two (2) power outlets per unit
- o Two (2) USB-A charging ports per unit
- o Two (2) open ports for data/AV jacks per unit
- o 6" x 4" bezel
- o Body and interior of unit black

NOTE FOR POWER ACCESS VOICE AND DATA JACKS REFER TO DATA JACK OPTIONS

Bezel and Door Color

Standard Powder Coat n/c
Premium Powder Coat \$147

NOTE TRANSPARENT POWDER COATS AND PLATINUM ARE NOT AVAILABLE

Individually Powered Unit

| Model | Description | |
|-------------|--------------------------------------|------------|
| EPA-IP | Individually powered (corded system) | \$491 list |
| Cord Length | | |
| 72 | 72" cord length | n/c |
| 144 | 144" cord length | \$36 list |
| 180 | 180" cord length | \$48 list |

UL/CSA Listed

Model Example: EPA-IP-144

Soft-Wired Linking Unit

| Model | Description | |
|--------|---------------------------|------------|
| EPA-SL | Soft-wired linking system | \$595 list |

SPECIFICATIONS

- o Single circuit, 15 AMP
- No sequencing of units required
- Up to eight (8) units per circuit
- o Requires HNPU power supply per circuit

HNPU Power supply unit \$404 list

Cord Length

| | • | |
|-----|------------------|-----------|
| 120 | 120" cord length | n/c |
| 144 | 144" cord length | \$17 list |
| 180 | 180" cord length | \$27 list |



ETL Listed to the UL962 Standard

Model Example: EPA-SL-120

Hard-Wired System

| Model | Description | |
|--------|-------------------|-----|
| EPA-HW | Hard-wired system | Cal |

SPECIFICATIONS

- o Multi-circuit (4 wire, 2 circuit, 20 AMP circuits)
- No sequencing of units required
- Up to 20 units linked per circuit
- o System priced per project, call for quote

NOTE UP TO 20 UNITS LINKED PER SYSTEM (10 CIRCUIT 1 AND 10 CIRCUIT 2).
MUST SPECIFY WHICH UNITS ARE TO BE ON WHICH CIRCUIT

UL/CSA Listed

Model Example: EPA-HW-DA-HD

Power Access Data Plate Guidelines

The Power Access Data Plate has (4) available slots for data jacks. Listed below are specification codes, number of slots each jack will occupy, and pricing.

| Jack Type | Specify Code | Number of Slots | List Price per Jack Type |
|---------------|-----------------|-----------------|-----------------------------|
| | | | |
| Data | DA | 1 | \$40 |
| Voice | V0 | 1 | \$16 |
| HDMI | HD | 2 | \$93 |
| Data Coupler | DD | 1 | \$128 |
| Voice Coupler | VV | 1 | \$37 |

Power Bay - \$1164 / unit

Specify code EPB_ (Power Bay - Location_), add \$1164.00 list per Power Bay for first unit per table and \$1164.00 for each additional unit.

For clear anodized aluminum finish, add \$126 list per unit

The flush mount Power Bay electrical unit(s) is factory installed in the specified location. Choose any standard powder coat, or Clear Anodized Aluminum, for bezel and door.

SPECIFICATIONS

- o One 10' cord, one 15 amp circuit, standard grounded plug
- Surge protection
- · Four electrical outlets per unit
- o Data plate with 9 slots



NOTE USE POWER BAY DATA PLATE GUIDELINES TO SPECIFY DATA JACKS



1 Power Bay - Provide Location Print \$1164 / table

Specify code EPB1 (1 Power Bay - Provide Location Print), add \$1164.00 list per table

One flush mount Power Bay electrical unit is factory installed in the top location indicated by specifier's print.



2 Power Bays - Provide Location Print \$2328 / table

Specify code EPB2 (2 Power Bays - Provide Location Print), add \$2328.00 list per table

Two flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.



3 Power Bays - Provide Location Print \$3492 / table

Specify code EPB3 (3 Power Bays - Provide Location Print), add \$3492.00 list per table

Three flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.



4 Power Bays - Provide Location Print \$4656 / table

Specify code EPB4 (4 Power Bays - Provide Location Print), add \$4656.00 list per table

Four flush mount Power Bay electrical units are factory installed in the top locations indicated by specifier's print.



The Power Bay Data Plate has (9) available slots for data jacks. Listed below are specification codes, number of slots each jack will occupy, and pricing.

| Jack Type | Specify Code | Number of Slots | List Price per Jack Type |
|---------------|-----------------|-----------------|-----------------------------|
| | | | |
| Data | DA | 1 | \$40 |
| Voice | V0 | 1 | \$16 |
| Mini Stereo | MS | 1 | \$19 |
| VGA | VG | 2 | \$28 |
| HDMI | HD | 2 | \$93 |
| USB | US | 2 | \$42 |
| Data Coupler | DD | 1 | \$128 |
| Voice Coupler | VV | 1 | \$37 |

V Charge VERSTEEL

V Charge Wireless Charging

Wireless charging pads for phones and tablets with built-in Qi wireless charging. Pads are surface mounted into the table top.



Option Code

VWC1 \$275 list

SPECIFICATIONS

- 10 Watt fast charge wireless charging unit embedded in table top
- Soft touch cover plate with V Charge logo
- Surface mounted
- ° 6' power supply included

Unit Color

BLK Black n/c WHT White n/c

Option Code

VWC2 \$353 list

SPECIFICATIONS

- 15 watt fast charge wireless charging unit embedded in table ton
- o Soft touch cover plate with V Charge logo
- Surface mounted
- ° 5' power supply included

Unit Color

BLK Black n/c WHT White n/c **VERSTEEL**

V Power™ (Kwikboost EdgePower)

V Power™ supports diversity and flexibility in a fluid environment. Utilizing cordless, batterypowered charging, the V Power attaches to the edge of each worksurface, giving individuals and teams the freedom to work or learn anywhere. For a more discreet appearance, mount unit under the worksurface with an optional bracket, sold separately.

CHARGING UNIT SPECIFICATIONS

- Adjustable, attaches to 0.7" to 1.5" tops
- o Includes 110V AC outlet, USB-A port and USB-C PD port
- · Charges laptops, tables, phones, etc
- · Operating temperatures: 32 to 113°F (0 to 45°C) while in use 14 to 131°F (-10 to 55°C) when not in use
- $\circ~$ Dimensions (with battery): 10.3"L x 4.9"W x 5.2" to 6"H

RECHARGEABLE BATTERY SPECIFICATIONS

- Easily Interchangeable
- · Rechargeable using base charging station
- o Includes LED charge indicator lights
- o 146.52 battery capacity
- o 18650 Li-ion battery
- · Up to 500 life cycles
- · Recharge time: 2 hours
- o Dimensions: 9.1"L x 3"W x 2.1"H

CHARGER / CHARGING STATION SPECIFICATIONS

- o Single charger, 3-bay charging station, or 9-bay charging station
- Fully recharges batteries in 2 hours
- o 3-bay station is stackable and expandable
- o Dimensions (with battery): Single 3.25"L x 0.75"W x 2.25"H 3-bay 15"L x 12"W x 6"H 9-bay 15"L x 12"W x 13.5"H







Personal Use Bundle

Model Description

VPPUB Two (2) Rechargeable Batteries \$1097 list One (1) Clamp-on Desktop Charging Unit One (1) Single Battery Charger

Light Use Bundle

| Model | Description | |
|-------|---|-------------|
| VPLUB | Three (3) Rechargeable Batteries Three (3) Clamp-on Desktop Charging | \$2157 list |
| | Units | |
| | One (1) 3-Bay Base Charging Station | |

Medium Use Bundle

| Model | Description | |
|-------|---|-------------|
| VPMUB | Six (6) Rechargeable Batteries Three (3) Clamp-on Desktop Charging Units (1) 3-Bay Base Charging Station | \$3158 list |

Heavy Use Bundle

| Model | Description | |
|-------|---|-------------|
| VPHUB | Nine (9) Rechargeable Batteries | \$5284 list |
| | Six (6) Clamp-on Desktop Charging Units | |
| | One (1) 9-Bay Base Charging Station | |

Constant Use Bundle

| Model | Description | |
|-------|--|-------------|
| VPCUB | Twelve (12) Rechargeable Batteries Six (6) Clamp-on Desktop Charging Units One (1) 9-Bay Base Charging Station | \$6263 list |

Under Surface Mounting Bracket

| Model | Description | |
|--------|-------------|---------------|
| VPUSMB | | \$ 34 list |

Single Circuit Powerlink Package \$1062 or \$1390 / table Specify code PPTL1 (Powerlink Package

Table link - ends only is included with henri and powerlink electrical package options selection. The table link will prevent the accidental disconnection of power supply to adiacent tables

Specify code **PPTL1** (Powerlink Package 72" or less), add \$1062.00 list per table

Specify code **PPTG1** (Powerlink Package greater than 72"), add \$1390.00 list per table

One Powerlink electrical unit is shipped with the table for field installation. Mounting Lever Locks are factory installed in the bottom front edge location of the table. Powerlink installs without the use of tools, in the above table top facing user, below table top facing out or below table top facing user positions.

SPECIFICATIONS

- · Single Circuit, Soft-wired, linking system
- o 9' cord, standard grounded plug (custom lengths available)
- o 15 Amp circuit w/breaker and Surge Protector
- One duplex outlet (2 simplex outlets) on Powerlinks up to 48" in length, and two duplex outlets on units longer than 48" (custom outlet configurations available)
- One voice, one data jack on Powerlinks up to 48" in length;
 Two voice, two data jacks on units longer than 48" (custom data configurations available)

NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

Multiple Circuit Powerlink Package – System 2 \$1062 or \$1390 / table

Specify code **PPTL2** (Powerlink Package 72" or less), add \$1062.00 list per table

Specify code **PPTG2** (Powerlink Package greater than 72"), add \$1390.00 list per table

One Powerlink electrical unit is shipped with the table for field installation. Mounting Lever Locks are factory installed in the bottom front edge location of the table. Powerlink installs without the use of tools, in the above table top facing user, below table top facing out or below table top facing user positions.

SPECIFICATIONS

- · Multi-circuit, hard-wired, linking system
- o 6' hard-wired in-feed (custom lengths available)
- o Two 20 Amp Circuits (4-wire, 2-circuit)
- Two duplex outlets (Circuits 1 & 2) on Powerlinks up to 60" in length, and four duplex outlets (2 on each circuit) on units longer than 60" (custom outlet configurations available)
- One voice, one data jack on Powerlinks up to 48" in length;
 Two voice, two data jacks on units longer than 48" (custom data configurations available)

NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

Table link - ends only is included with henri and powerlink electrical package options selection. The table link will prevent the

accidental disconnection

of power supply to

adiacent tables

Multiple Circuit Powerlink Package – System 3 \$1500 or \$1809 / table

Specify code **PPTL3** (Powerlink Package 48" or less), add \$1500.00 list per table

Specify code **PPTG3** (Powerlink Package greater than 48"), add \$1809.00 list per table

One Powerlink electrical unit is shipped with the table for field installation. Mounting Lever Locks are factory installed in the bottom front edge location of the table. Powerlink installs without the use of tools, in the above table top facing user, below table top facing out or below table top facing user positions.

SPECIFICATIONS

- o Multi-circuit, hard-wired, linking system
- o 6' hard-wired in-feed (custom lengths available)
- o Three 20 Amp Circuits (8-wire, 3-circuit)
- Three simplex outlets (circuits 1, 2 & 3) on Powerlinks up to 48" in length, and two sets of three simplexes on Powerlinks greater than 48" in length (outlet configurations are customizable)
- One voice, one data jack on Powerlinks up to 48" in length;
 Two voice, two data jacks on units longer than 48" (custom data configurations available)
- Circuit 3 has a shielded, independent ground wire for computers and peripherals
- No shared neutrals on the 3 circuits

NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

Power Source Outlets \$175 / power source

Specify code **PPS** (Power Source Outlets), add \$175.00 list per table

Power Source Outlets supply individual tables surge protected electrical connections. Unit is field installed and controlled by an illuminated On/Off switch.



SPECIFICATIONS

- o 10' 14 AWGx3C power cord
- o Illuminated On/Off and Reset switch
- o 1,000 Joules surge protection
- ° Six (6) grounded power outlets per unit
- o Aluminum housing mounts to underside of top
- Black

NOTE FOR MORE PLANNING AND ORDERING DETAIL INFORMATION SEE ELECTRICAL PLANNING SECTION PAGES 55-70

Table link - ends only is included with henri and powerlink electrical package options selection. The table link will prevent the accidental disconnection of power supply to adjacent tables

Eclipse

Model

Soft touch finish brings a hint of play to any fashionable work environment. Three port options. Mounts in surface.

Description

SPECIFICATIONS

o Hole mount is 4.5" diameter



| ECL-IP3X | Three (3) power | \$392 lis |
|-------------|-------------------------------------|-----------|
| ECL-IP2U | Two (2) power and one (1) dual port | \$462 lis |
| | USB charger | |
| Unit Color | | |
| STB | Soft Touch Black Plastic | n/c |
| STG | Soft Touch Green Plastic | n/c |
| STO STO | Soft Touch Orange Plastic | n/c |
| STW | Soft Touch White Plastic | n/c |
| Cord Length | | |
| 72 | 72" cord length, black | n/c |

Model Example: ECL-IP2U-STB-72

120" cord length black

Hemisphere

120

Soft touch finish brings a hint of play to any fashionable work environment. Three port options. Mounts in surface.

Description

Three (3) power

SPECIFICATIONS

Model

HEM-IP3X

o Hole mount is 3" diameter



\$282 list

\$ 18 list

\$ 18 list

| HEM-IP2U | Two (2) power and one (1) dual port USB charger | \$350 lis |
|-------------|--|-----------|
| Unit Color | | |
| STB | Soft Touch Black Plastic | n/c |
| STG | Soft Touch Green Plastic | n/c |
| ST0 | Soft Touch Orange Plastic | n/c |
| STW | Soft Touch White Plastic | n/c |
| Cord Length | | |
| 72 | 72" cord length, black | n/c |

Model Example: HEM-IP2U-STB-72

120" cord length, black

Mini-Tap

120

Mini-Tap provides 2 outlets that can be mounted, with key slots, so as to put power near the edge of the worksurface. Mini-Tap is black.



SPECIFICATIONS

- o Two (2) Simplexes
- o Available with spill-proof Simplexes

| Model | Description | |
|----------------------|---|--------------------------|
| MTP-IP2X MTP-IP2U | Two (2) power One (1) power and one (1) dual port USB charger | \$133 list \$343 list |
| Cord Length | | |

- 72" cord

| 72 | 72" cord length, black | n/c |
|-----|-------------------------|------------|
| 120 | 120" cord length, black | \$ 18 list |

Node

Flush mount design complements a wide range of aesthetics. Plated or powder coat finishes bely a robust, die-cast construction.



| Model | Description | / |
|----------|-------------------------------------|------------|
| NOD-IP2X | Two (2) power | \$252 list |
| NOD-IP2U | One (1) power and one (1) dual port | \$347 list |
| | USB charger | |
| NOD-IP20 | One (1) power and one (1) open | \$238 list |
| | data port | |

Unit Color (Additional finishes available upon request)

| DBP | Dark Bronze Plated | \$122 list |
|-----|-----------------------|------------|
| MPC | Midnight Powder Coat | n/c |
| PPC | Parchment Powder Coat | n/c |
| SNP | Satin Nickel Plated | \$122 list |
| SPC | Silver Powder Coat | n/c |

Cord Length

| 72 | 72" cord length, black | n/c |
|-----|-------------------------|------------|
| 120 | 120" cord length, black | \$ 18 list |

Data Option (Only available with NOD-IP20)

| DA | Cat6 RJ45 data jack w/ 10' patch cord | \$ 86 list |
|----|---------------------------------------|---------------|
| HD | HDMI jack | \$ 98 list |
| US | USB passive jack | \$ 63 list |
| V0 | Cat3 RJ11 voice jack w/ 7' patch cord | \$ 40 list |

Model Example: NOD-IP2U-SPC-72

Salt or Pepper

Individual dual USB charger or power outlet for easy, quick access applications.

SPECIFICATIONS

- Salt or Pepper hole mount is 1 ¾" diameter
- Smooth seamless designSpill-proof power simplex
- 72" power cord, black



| Model | Description | |
|-------|---------------------------------------|------------|
| SLT1 | One (1) dual port USB A charger | \$185 list |
| SLT3 | One (1) single port USB C 60 watt | \$390 list |
| | charger | |
| SLT4 | One (1) 10 watt USB A + 10 watt | \$234 list |
| | USB C charger | |
| PPR | One (1) power outlet w/72" black cord | \$102 list |

Unit Color (Additional finishes available upon request)

| BERP | Berry |
|------|--------------|
| BLKP | Black |
| BLUP | Blue |
| DSKP | Dusk |
| FOGP | Fog |
| HNYP | Honey |
| NVYP | Navy |
| ORGP | Orange |
| PCKP | Peacock |
| PPYP | Рорру |
| SGRP | Spring Green |
| SRMP | Storm |
| WHTP | White |
| | |

Model Example: SLT4-BLKP

Versteel Power

Axil Z IP (Individually Powered)

Constructed out of anodized aluminum with a painted, steel faceplate, Axil Z is a robust, scalable and customizable power/data solution.



SPECIFICATIONS

- Mounts flat, sitting just above worksurface
- o Requires cutout in worksurface
- Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops ¾" to 1 ¾" thick

| | 7,7 10 1 7,7 1111011 | |
|--|--|---|
| Model | Description | |
| AXZ-IP-2-0 AXZ-IP-2-2 AXZ-IP-2-4 AXZ-IP-2-6 | Two (2) power and no data Two (2) power and two (2) open ports Two (2) power and four (4) open ports Two (2) power and six (6) open ports | \$373 list \$382 list \$390 list \$399 list |
| AXZ-IP-3-1 AXZ-IP-3-3 AXZ-IP-3-5 | Three (3) power and one (1) open port Three (3) power and three (3) open ports Three (3) power and five (5) open ports | \$396 list \$403 list \$412 list |
| AXZ-IP-4-0 AXZ-IP-4-2 AXZ-IP-4-4 | Four (4) power and no open ports Four (4) power and two (2) open ports Four (4) power and four (4) open ports | \$491 list \$499 list \$505 list |
| Unit Color | | |
| MWCA MBCA MSCA MFCA GWCA GBCA SVCA MWBA MBBA MFBA GWBA GBBA SVBA | Matte White Faceplate, Clear Al Trim Matte Black Faceplate, Clear Al Trim Matte Storm Faceplate, Clear Al Trim Matte Fog Faceplate, Clear Al Trim Gloss White Faceplate, Clear Al Trim Gloss Black Faceplate, Clear Al Trim Silver Faceplate, Clear Al Trim Matte White Faceplate, Black Trim Matte Black Faceplate, Black Trim Matte Storm Faceplate, Black Trim Matte Fog Faceplate, Black Trim Gloss White Faceplate, Black Trim Gloss White Faceplate, Black Trim Gloss Black Faceplate, Black Trim Silver Faceplate, Black Trim | n/c n/c n/c n/c n/c n/c n/c n/c s128 list \$128 list \$128 list \$128 list \$128 list \$128 list \$128 list |
| Cord Length | | |
| 72 120 | 72" cord length, black 120" cord length, black | n/c \$ 18 list |
| USB Chargin | ng Options (Total cannot exceed 80 watts | 3) |
| UA UA2 | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A | \$136 list \$268 list |
| UAC | charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) | \$136 list |
| UAC2 | Two (2) 10 watt USB A + 10 watt USB C | \$272 list |
| UC | charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) | \$290 list |
| Data Option | (Each data jack requires 1 open port) | |
| DA HD MS US VG VO | Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack USB passive jack VGA jack, 15 pin Cat3 RJ11 voice jack w/ 7' patch cord | \$ 86 list \$ 98 list \$ 28 list \$ 63 list \$122 list \$ 40 list |

Model Example: AXZ-IP-4-2-GWCA-72-DA-DA

Tables specified with Constructed out of an linked units require table with a painted, steel

link. The table link will

prevent the accidental

disconnection of power

supply to adjacent tables.

Constructed out of anodized aluminum with a painted, steel faceplate, Axil Z is a robust, scalable and customizable power/data solution.

Axil Z SL2 (Soft-Wired, Linked)



- Mounts flat, sitting just above worksurface
- o Requires cutout in worksurface
- Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops ¾" to 1 ¾" thick

| Fits in tops | 3 ¾" to 1 ¾" thick | |
|----------------------------------|--|-------------------|
| Maximum | of 8 units in sequence | |
| ∘ Interlink iQ | 2.0 (not compatible with units sold prior | to 2/1/19) |
| | | |
| Model | Description | |
| AXZ-SL2-2-0 | Two (2) power and no data | \$384 list |
| AXZ-SL2-2-2 | Two (2) power and two (2) open ports | \$394 list |
| AXZ-SL2-2-4 | Two (2) power and four (4) open ports | \$402 list |
| AXZ-SL2-2-6 | Two (2) power and six (6) open ports | \$410 list |
| | | |
| AXZ-SL2-3-1 | Three (3) power and one (1) open port | \$407 list |
| AXZ-SL2-3-3 | Three (3) power and three (3) open ports | \$416 list |
| AXZ-SL2-3-5 | Three (3) power and five (5) open ports | \$424 list |
| NOTE SOFT-WIF | RED, LINKED UNITS CAN HAVE A MAXIMUM OF 3 PO | WER |
| OUTLETS AND 1 | DUAL PORT USB CHARGING MODULE PER UNIT. | |
| | | |
| Unit Color | | |
| MWCA | Matte White Faceplate, Clear Al Trim | n/c |
| MBCA | Matte Black Faceplate, Clear Al Trim | n/c |
| MSCA | Matte Storm Faceplate, Clear Al Trim | n/c |
| MFCA | Matte Fog Faceplate, Clear Al Trim | n/c |
| GWCA | Gloss White Faceplate, Clear Al Trim | n/c |
| GBCA | Gloss Black Faceplate, Clear Al Trim | n/c |
| SVCA | Silver Faceplate, Clear Al Trim | n/c |
| MWBA | Matte White Faceplate, Black Trim | \$128 list |
| MBBA | Matte Black Faceplate, Black Trim | \$128 list |
| MSBA | Matte Storm Faceplate, Black Trim | \$128 list |
| MFBA | Matte Fog Faceplate, Black Trim | \$128 list |
| GWBA | Gloss White Faceplate, Black Trim | \$128 list |
| GBBA | Gloss Black Faceplate, Black Trim | \$128 list |
| SVBA | Silver Faceplate, Black Trim | \$128 list |
| Power Infee | ed | |
| BPS2-72 | 72" cord length, black | \$509 list |
| BPS2-120 | 120" cord length, black | \$526 list |
| BPS2-180 | 180" cord length, black | \$556 list |
| NOTE 8 UNITS F | · · | |
| NOIL CONTO | ENT DI 3. | |
| Jumper | | |
| BEJ2 | Standard jumper included with tables | \$134 list |
| | up to and including 60". BEJ2 jumper | |
| | required for tables greater than 60". | |
| | | |
| - | ng Options (Total cannot exceed 80 watt | |
| UA | One (1) 20 watt dual port USB A | \$136 list |
| | charging module (requires 1 open port) | ************* |
| UA2 | Two (2) 20 watt dual port USB A | \$268 list |
| | charging modules (requires 2 open ports) | * 400 !: |
| UAC | One (1) 10 watt USB A + 10 watt USB C | \$136 list |
| 114.00 | charging module (requires 1 open port) | φο σο !! : |
| UAC2 | Two (2) 10 watt USB A + 10 watt USB C | \$272 list |

Model Example: AXZ-SL2-2-0-GWCA

USB passive jack

VGA jack, 15 pin

HDMI jack

(requires 2 open ports)

Data Option (Each data jack requires 1 open port)

3.5mm mini-stereo audio jack

UC

DA HD

MS

US

VG

V0

charging modules (requires 2 open ports)

One (1) 60 watt USB C charging module \$290 list

Cat6 RJ45 data jack w/ 10' patch cord \$ 86 list

Cat3 RJ11 voice jack w/ 7' patch cord \$ 40 list

\$ 98 list

\$ 28 list

\$ 63 list \$122 list

Ellora IP (Individually Powered)

Anodized aluminum construction and smart design keep cable clutter out of sight.



SPECIFICATIONS

- Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops ¾" to 1 ¾" thick
- · Requires cutout in worksurface

| Model | Description | |
|-----------------------------------|--|--|
| ELL-IP-2-0 | Two (2) power and no data | \$585 list |
| ELL-IP-2-2 ELL-IP-2-4 | Two (2) power and two (2) open ports Two (2) power and four (4) open ports | \$597 list \$606 list |
| ELL-IP-2-6 | Two (2) power and six (6) open ports | \$617 list |
| ELL-IP-3-1 | Three (3) power and one (1) open port | \$612 list |
| ELL-IP-3-3 ELL-IP-3-5 | Three (3) power and three (3) open ports Three (3) power and five (5) open ports | \$623 list \$632 list |
| ELL-IP-4-0 | Four (4) power and no open ports | \$761 list |
| ELL-IP-4-2 | Four (4) power and two (2) open ports | \$771 list |
| ELL-IP-4-4 | Four (4) power and four (4) open ports | \$782 list |
| Unit Color | | |
| SAAWT | Silver Anodized Aluminum with White Trim | n/c |
| SAABT | Silver Anodized Aluminum with Black Trim | n/c |
| BAABT | Black Anodized Aluminum with | \$184 list |
| | DIACK IIIIII | |
| Cord Length | | |
| 72 | 72" cord length, black | n/c |
| 120 | 120" cord length, black | \$ 18 list |
| USB Chargi | Ontions /Total assess sussed COatta | 1 |
| | ng Options (Total cannot exceed 80 watts | 3) |
| UA | One (1) 20 watt dual port USB A | \$136 list |
| • | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A | |
| UA | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C | \$136 list |
| UA UA2 | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C | \$136 list \$268 list |
| UA UA2 UAC | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module | \$136 list \$268 list \$136 list |
| UA2 UAC UAC2 | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) | \$136 list \$268 list \$136 list \$272 list |
| UA2 UAC UAC2 UC | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module | \$136 list \$268 list \$136 list \$272 list |
| UAC UAC2 UC Data Option DA | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord | \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list |
| UAC UAC2 UC Data Option DA HD | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack | \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list |
| UAC UAC2 UC Data Option DA | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack | \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list |
| UAC UAC2 UC Data Option DA HD MS | One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack | \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list |

Model Example: ELL-IP-4-4-SAABT-72-U1-DA-DA-HD

Tables specified with linked units require table link. The table link will prevent the accidental disconnection of power supply to adjacent tables.

Ellora SL2 (Soft-Wired, Linked)

Smart design keeps cable clutter out of sight by allowing use while the lid is shut.

SPECIFICATIONS

- Includes a voice/data adapter kit to accept couplers and jacks when required
- $\circ\,$ Fits in tops $3\!4\!''$ to 1 $3\!4\!''$ thick
- · Requires cutout in worksurface
- Maximum of 8 units in sequence
- \circ Interlink iQ 2.0 (not compatible with units sold prior to 2/1/19)

| Model | Description | |
|--|---|--|
| ELL-SL2-2-0 ELL-SL2-2-2 ELL-SL2-2-4 ELL-SL2-2-6 | Two (2) power and no data Two (2) power and two (2) open ports Two (2) power and four (4) open ports Two (2) power and six (6) open ports | \$597 list \$612 list \$638 list \$664 list |
| ELL-SL2-3-1 ELL-SL2-3-3 ELL-SL2-3-5 | Three (3) power and one (1) open port Three (3) power and three (3) open ports Three (3) power and five (5) open ports | \$608 list \$633 list \$661 list |
| | RED, LINKED UNITS CAN HAVE A MAXIMUM OF 3 POL DUAL PORT USB CHARGING MODULE PER UNIT. | WER |
| Unit Color | | |
| SAAWT | Silver Anodized Aluminum with White Trim | n/c |
| SAABT | Silver Anodized Aluminum with Black Trim | n/c |
| BAABT | Black Anodized Aluminum with Black Trim | \$184 list |
| Power Infee | d | |
| BPS2-72 BPS2-120 BPS2-180 | 72" cord length, black 120" cord length, black 180" cord length, black | \$509 list \$526 list \$556 list |
| NOTE 8 UNITS P | PER 1 BPS. | |
| Jumper | | |
| BEJ2 | Standard jumper included with tables up to and including 60". BEJ2 jumper required for tables greater than 60". | \$134 list |
| USB Chargir | ng Options (Total cannot exceed 80 watts | s) |
| UA | One (1) 20 watt dual port USB A charging module (requires 1 open port) | \$136 list |
| UA2 | Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) | \$268 list |
| UAC | One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) | \$136 list |
| UAC2 | Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) | \$272 list |
| UC | One (1) 60 watt USB C charging module (requires 2 open ports) | \$290 list |
| Data Option | (Each data jack requires 1 open port) | |
| DA HD MS | Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack | \$ 86 list \$ 98 list \$ 28 list \$ 63 list |

Model Example: ELL-SL2-2-0-SAABT

Versteel Power

Mho IP (Individually Powered)

Retractable and durably constructed. Highly functional with a fluid, one touch door that remains open during use.



SPECIFICATIONS

- Fluid, one touch accessibility
- o Includes a voice/data adapter kit to accept couplers and jacks when required
- Fits in tops 3/4" to 1 3/4" thick

| Model | Description | | |
|--|--|---|--|
| MHO-IP-2-0 | Description Two (2) power and no data | \$501 list | |
| MHO-IP-2-2 | Two (2) power and two (2) open ports | \$501 list \$510 list | |
| MH0-IP-2-4 | Two (2) power and four (4) open ports | \$522 list | |
| MH0-IP-2-6 | Two (2) power and six (6) open ports | \$531 list | |
| MH0-IP-3-1 | Three (3) power and one (1) open port | \$585 list | |
| MHO-IP-3-3 | Three (3) power and three (3) open ports | \$598 list | |
| MH0-IP-3-5 | Three (3) power and five (5) open ports | \$608 list | |
| MH0-IP-4-0 | Four (4) power and no open ports | \$653 list | |
| MHO-IP-4-2 | Four (4) power and two (2) open ports | \$662 list | |
| MH0-IP-4-4 | Four (4) power and four (4) open ports | \$672 list | |
| Unit Color | | | |
| SAABT | Silver Anodized Aluminum with Black Trim | n/c | |
| SAAWT | Silver Anodized Aluminum with | n/c | |
| | White Trim | | |
| SAA | Silver Anodized Aluminum | n/c | |
| BAA | Black Anodized Aluminum | \$184 list | |
| Cord Length | | | |
| 72 | 701 11 11 1 | | |
| | 72" cord length, black | n/c | |
| 120 | 120" cord length, black | n/c \$ 18 list | |
| 120 | 9 | \$ 18 list | |
| 120 | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A | \$ 18 list | |
| 120 USB Chargin | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) | \$ 18 list | |
| USB Chargin UA UA2 | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) | \$ 18 list s) \$136 list | |
| USB Chargin | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C | \$ 18 list s) \$136 list | |
| USB Chargin UA UA2 | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C | \$ 18 list s) \$136 list \$268 list | |
| USB Charging UA UA2 UAC UAC2 | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) | \$ 18 list \$) \$136 list \$268 list \$136 list \$272 list | |
| USB Chargin UA UA2 UAC | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C | \$ 18 list \$) \$136 list \$268 list \$136 list | |
| USB Chargin UA UA2 UAC UAC2 UC | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) | \$ 18 list s) \$136 list \$268 list \$136 list \$272 list | |
| USB Chargin UA UA2 UAC UAC2 UC | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module | \$ 18 list s) \$136 list \$268 list \$136 list \$272 list | |
| USB Chargin UA UA2 UAC UAC2 UC | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) | \$ 18 list (s) \$136 list \$268 list \$136 list \$272 list \$290 list | |
| USB Chargin UA UA2 UAC UAC2 UC Data Option | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord | \$ 18 list (s) \$136 list \$268 list \$136 list \$272 list \$290 list \$86 list | |
| USB Chargin UA UA2 UAC UAC2 UC Data Option DA HD MS US | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack USB passive jack | \$ 18 list \$) \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list \$ 63 list | |
| USB Chargin UA UA2 UAC UAC2 UC Data Option DA HD MS | 120" cord length, black ng Options (Total cannot exceed 80 watts One (1) 20 watt dual port USB A charging module (requires 1 open port) Two (2) 20 watt dual port USB A charging modules (requires 2 open ports) One (1) 10 watt USB A + 10 watt USB C charging module (requires 1 open port) Two (2) 10 watt USB A + 10 watt USB C charging modules (requires 2 open ports) One (1) 60 watt USB C charging module (requires 2 open ports) (Each data jack requires 1 open port) Cat6 RJ45 data jack w/ 10' patch cord HDMI jack 3.5mm mini-stereo audio jack | \$ 18 list (s) \$136 list \$268 list \$136 list \$272 list \$290 list \$ 86 list \$ 98 list \$ 28 list | |

Model Example: MHO-IP-3-3-SAABT-72-U1-DA-DA

Tables specified with

linked units require table

link. The table link will

prevent the accidental

disconnection of power

supply to adjacent tables.

Retractable and durably constructed. Highly functional with a fluid, one touch door that remains open during use.



SPECIFICATIONS

· Fluid, one touch accessibility

Mho SL2 (Soft-Wired, Linked)

- o Includes a voice/data adapter kit to accept couplers and jacks when required
- $\circ~$ Fits in tops $\mbox{\em 34}\mbox{\em "}$ to 1 $\mbox{\em 34}\mbox{\em "}$ thick
- Maximum of 8 units in sequence
- Interlink iQ 2.0 (not compatible with units sold prior to

| o Interlink IQ 2.0 (not compatible with units sold prior to 2/1/19) | | | |
|--|---|------------|--|
| Model | Description | | |
| MH0-SL2-2-0 | Two (2) power and no data | \$520 list | |
| MH0-SL2-2-2 | Two (2) power and two (2) open ports | \$529 list | |
| MH0-SL2-2-4 | Two (2) power and four (4) open ports | \$542 list | |
| MH0-SL2-2-6 | Two (2) power and six (6) open ports | \$550 list | |
| MH0-SL2-3-1 | Three (3) power and one (1) open port | \$608 list | |
| MH0-SL2-3-3 | Three (3) power and three (3) open ports | \$618 list | |
| MH0-SL2-3-5 | Three (3) power and five (5) open ports | \$629 list | |
| NOTE SOFT-WIRED, LINKED UNITS CAN HAVE A MAXIMUM OF 3 POWER OUTLETS AND 1 DUAL PORT USB CHARGING MODULE PER UNIT. | | | |
| Unit Color | | | |
| SAABT | Silver Anodized Aluminum with Black Trim | n/c | |
| SAAWT | Silver Anodized Aluminum with White Trim | n/c | |
| SAA | Silver Anodized Aluminum | n/c | |
| BAA | Black Anodized Aluminum | \$184 list | |
| Power Infeed | | | |

| BPS2-/2 | /2" cord length, black | \$509 list |
|----------|-------------------------|------------|
| BPS2-120 | 120" cord length, black | \$526 list |
| BPS2-180 | 180" cord length, black | \$556 list |
| | | |

NOTE 8 UNITS PER 1 BPS.

Jumper

| BEJ2 | Standard jumper included with tables | \$134 list |
|------|---------------------------------------|------------|
| | up to and including 60". BEJ2 jumper | |
| | required for tables greater than 60". | |

USB Charging Options (Total cannot exceed 80 watts)

| UA | One (1) 20 watt dual port USB A \$136 list |
|------|--|
| | charging module (requires 1 open port) |
| UA2 | Two (2) 20 watt dual port USB A \$268 list |
| | charging modules (requires 2 open ports) |
| UAC | One (1) 10 watt USB A + 10 watt USB C \$136 list |
| | charging module (requires 1 open port) |
| UAC2 | Two (2) 10 watt USB A + 10 watt USB C \$272 list |
| | charging modules (requires 2 open ports) |
| UC | One (1) 60 watt USB C charging module \$290 list |
| | (requires 2 open ports) |

Data Option (Each data jack requires 1 open port)

| DA | Cat6 RJ45 data jack w/ 10' patch cord | \$ 86 list |
|----|---------------------------------------|------------|
| HD | HDMI jack | \$ 98 list |
| MS | 3.5mm mini-stereo audio jack | \$ 28 list |
| US | USB passive jack | \$ 63 list |
| VG | VGA jack, 15 pin | \$122 list |
| VO | Cat3 RJ11 voice jack w/ 7' patch cord | \$ 40 list |

Model Example: MHO-SL2-2-0-SAAWT

All Ashley soft-wired linking systems require an HNPU power supply unit per each sequence. Specify code HNPU, \$403.00 list each.

- o 120" cord length
- 15 amp circuit
- o standard grounded plug
- o surge protection

Ashley Duo Over

Model



Tables specified with linked units require table

link. The table link will

prevent the accidental

disconnection of power

supply to adjacent tables.

Sharp, clean design features smooth receptacle faces, sleek satin metal trim, and optional ports for extensive power and data delivery.

Description



| ADO-IP | Two (2) power, one (1) dual port USB charging, individually powered, soft-wired | \$483 list |
|-------------------|--|-------------------|
| ADO-HW | Two (2) power, one (1) dual port USB charging, individually powered, hard-wired | \$546 list |
| ADO-SL | Two (2) power, one (1) dual port USB charging, soft-wired linking (includes jumper) | \$679 list |
| Unit Color | | |
| BB WS WW | Black with Black Mounting Bracket White with Silver Mounting Bracket White with White Mounting Bracket | n/c n/c n/c |

| 72 | 72" cord length | n/c |
|-----|------------------|---------------|
| 120 | 120" cord length | \$ 18 list |

Ashley Trio Over

Sharp, clean design features smooth Tables specified with linked units require table receptacle faces, sleek satin metal link. The table link will trim, and optional ports for extensive prevent the accidental power and data delivery. disconnection of power supply to adjacent tables.

72

120



n/c

\$ 18 list

| Model | Description | | |
|---|--|-------------------|--|
| ATO-IP | Three (3) power, one (1) dual port USB charging, individually powered, soft-wired | \$542 list | |
| ATO-HW | Three (3) power, one (1) dual port USB charging, individually powered, hard-wired | \$576 list | |
| ATO-SL | Three (3) power, one (1) dual port USB charging, soft-wired linking (includes jumper) | \$679 list | |
| Unit Color | | | |
| BB WS WW | Black with Black Mounting Bracket White with Silver Mounting Bracket White with White Mounting Bracket | n/c n/c n/c | |
| Cord Length (Individually powered units only) | | | |

72" cord length

120" cord length

Ashley Duo Under

Tables specified with linked units require table link. The table link will prevent the accidental disconnection of power supply to adjacent tables.

Sharp, clean design features smooth receptacle faces, sleek satin metal trim, and optional ports for extensive power and data delivery.



| Model | Description | |
|-------------------|---|------------|
| ADU-IP | Two (2) power, one (1) dual port USB charging, individually powered, soft-wired | \$425 list |
| ADU-HW | Two (2) power, one (1) dual port USB charging, individually powered, hard-wired | \$483 list |
| ADU-SL | Two (2) power, one (1) dual port USB charging, soft-wired linking (includes jumper) | \$618 list |
| Unit Color | | |
| BB | Black with Black Mounting Bracket | n/c |
| WS | White with Silver Mounting Bracket | n/c |
| WW | White with White Mounting Bracket | n/c |
| Cord Lengtl | (Individually powered units only) | |
| 72 | 72" cord length | n/c |
| 120 | 120" cord length | \$ 18 list |

Ashley Trio Under

Tables specified with linked units require table link. The table link will prevent the accidental disconnection of power supply to adjacent tables.

Sharp, clean design features smooth receptacle faces, sleek satin metal trim, and optional ports for extensive power and data delivery.



| Model | Description | | |
|-------------|---|-----|----------|
| ATU-IP | Three (3) power, one (1) dual port USB charging, individually powered, soft-wired | \$5 | 503 list |
| ATU-HW | Three (3) power, one (1) dual port USB charging, individually powered, hard-wired | \$5 | 542 list |
| ATU-SL | Three (3) power, one (1) dual port USB charging, soft-wired linking (includes jumper) | \$6 | 618 list |
| Unit Color | | | |
| BB | Black with Black Mounting Bracket | | n/c |
| WS | White with Silver Mounting Bracket | | n/c |
| WW | White with White Mounting Bracket | | n/c |
| Cord Length | (Individually powered units only) | | |
| 72 | 72" cord length | | n/c |
| 120 | 120" cord length | \$ | 18 list |

Power & Data

CPU Holder \$212 / each

AVAILABLE ON BRATTICE WAVELINK

Specify code ACPU3-9F (CPU Holder), add \$212.00 list each

SPECIFICATIONS

- ∘ Width adjustment from 2 ½" to 9"
- Height adjustment from 10" to 21 ½"

NOTE TABLE TOP WILL BE PRE-DRILLED FOR FIELD INSTALLATION



CPU Holder \$139 / each

AVAILABLE ON INTERPLAY VELA WAVELINK Specify code ACPU5-8F (CPU Holder), add \$139.00 list each

SPECIFICATIONS

· Adjusts from 5" to 8"

CPU Holder (Slim Line)

Specify code ACPU3F (CPU Holder), add \$139.00 list each



\$139 / each

SPECIFICATIONS

o Adjusts from 3" to 5"

Keyboard Platform with Mouse Surface \$682 / each

Specify code AKP27M (Keyboard Platform with Mouse Surface), add \$682.00 list each

SPECIFICATIONS

- · Low profile design
- o 7" height adjustment with single lever control for height and tilt features
- ° 25° adjustable tilt feature
- o 360° rotation
- · Ergonomic wrist rest
- o 8" mouse surface with pad installs right or left of keyboard
- Meets BIFMA standards

NOTE TABLE TOP WILL BE PRE-DRILLED FOR FIELD INSTALLATION

Data Jacks \$81 / set of 2

Specify code AHDDJ (Two Data Jacks), add \$81.00 list for set of 2

SPECIFICATIONS

- o Data/data access plate with two jacks
- o Two (2) CAT6 data jacks
- $\circ\,$ The mounting plate snaps into the Henri unit

NOTE CONTACT VERSTEEL CUSTOMER SERVICE FOR AVAILABILITY OF ALTERNATE JACKS

Voice and Data Jacks \$70 / set of 2

Specify code AHVDJ (Voice and Data Jacks), add \$70.00 list for set of 2

SPECIFICATIONS

- · Voice/data access plate with two jacks
- o One (1) CAT3 voice jack
- o One (1) CAT6 data jack
- · The mounting plate snaps into the Henri unit

NOTE CONTACT VERSTEEL CUSTOMER SERVICE FOR AVAILABILITY OF ALTERNATE JACKS

Quick Connect \$174 / each

Specify code AHQCVDJ (Quick Connect System), add \$174.00 per unit

This option provides a pre-wired, quick connection for hooking up tables to standard RJ45 patch cables. The standard option includes two CAT3 voice jacks



and two CAT6 data jacks which are pre-wired and terminated on the bottom side of the table top in a surface-mount box. To connect the table to existing voice/data lines, the user simply plugs a standard RJ45 patch cable into the surface mount box under the table.

SPECIFICATIONS

- · Voice/data access plate with two (2) jacks
- o The mounting plate snaps in to the Henri unit
- · Surface-mount box with two jacks

NOTE CONTACT VERSTEEL CUSTOMER SERVICE FOR AVAILABILITY OF ALTERNATE JACKS

Quick Connect \$199 / each

Specify code AHQCDDJ (Quick Connect System), add \$199.00 per unit

This option provides pre-wired quick connection for hooking up tables to standard RJ45 patch cables. The standard option includes two CAT6 data jacks which are pre-wired and terminated on the bottom side of the table top in a surfacemount box. To connect the table to existing data lines, the user simply plugs a standard RJ45 patch cable into the surface mount box under the table.

SPECIFICATIONS

- · Data access plate with two (2) jacks
- o The mounting plate snaps into the Henri unit
- o Surface-mount box with two (2) jacks

NOTE CONTACT VERSTEEL CUSTOMER SERVICE FOR AVAILABILITY OF ALTERNATE JACKS

Couplers

Data Couplers - Specify code DD, add \$107.00 list each

Voice Couplers - Specify code VV, add \$81.00 list each

Installed directly in the power/data unit, couplers are "female" jacks that allow units to be connected to a data wall plate with a standard data patch cable (with "male" jacks on each end). This is a convenient option for tables that will be moved frequently.

Available on all power/data units, excluding Henri and Henri Now (Henri Quick Connect provides the same functionality as a data coupler for Henri and Henri Now).

Round Grommet - \$68 / each

Specify code WR_ (Round Grommet - Location_), add \$68.00 list per grommet

SPECIFICATIONS

- 3" diameter
- o 2 1/4" inside dimension
- o 2-piece black insert
- o factory installed in specified location



AVAILABLE ON ELIGA PACES TIM TOD TY

WAVELINK

1 Grommet - Location A

Round Grommet - Specify code WRA, add \$68.00 list per table



add \$86.00 list per table

1 grommet is factory installed in the front center location of

AVAILABLE ON FLIGA PERFORMANCE VELA WAVELINK

1 Grommet - Location B

Round Grommet - Specify code WRB, add \$68.00 list per table



add \$86.00 list per table

1 grommet is factory installed in the front left corner location of the top.

AVAILABLE ON FLIGA VELA WAVELINK

1 Grommet - Location C

Round Grommet - Specify code WRC, add \$68.00 list per table



1 grommet is factory installed in the front right corner location of the top.

AVAILABLE ON PERFORMANCE TIM VELA WAVELINK

2 Grommets - Location D

Round Grommet - Specify code WRD, add \$136.00 list per table

Oval Brush Grommet - Specify code WOD,

add \$172.00 list per table

2 grommets are factory installed in the front center locations of the top.

AVAILABLE ON PERFORMANCE WAVELINK

2 Grommets - Location E

Round Grommet - Specify code WRE, add \$136.00 list per table

Oval Brush Grommet - Specify code WOE, add \$172.00 list per table

2 grommets are factory installed in the front corner locations of the top.



Specify code WO_ (Oval Brush Grommet - Location _), add \$86.00 list per grommet

SPECIFICATIONS

- 3" x 7 ½" oval
- o black brush insert cord access
- o 1 ½" x 4" inside dimension
- o factory installed in specified location

AVAILABLE ON BRATTICE PERFORMANCE VELA WAVELINK

1 Grommet - Location F

Round Grommet - Specify code WRF. add \$68.00 list per table



1 oval brush grommet is factory installed running widthwise in the center location of the top.

AVAILABLE ON BRATTICE PERFORMANCE VELA WAVELINK

2 Grommets - Location H

Round Grommet - Specify code WRH, add \$136.00 list per table

Oval Brush Grommet - Specify code WOH,

add \$172.00 list per table

2 grommets are factory installed in a predetermined centerline location of the top

AVAILABLE ON BRATTICE VELA WAVELINE

1 Grommet - Location K

Round Grommet - Specify code WRK, add \$68.00 list per table

Oval Brush Grommet - Specify code WOK, add \$86.00 list per table

1 grommet is factory installed running lengthwise in the center location of the top.

AVAILABLE ON INTERPLAY ROVER
COMPUTER INTERPLAY ROVER DADDY

1 Grommet - Location R

Round Grommet - Specify code WRR, add \$68.00 list per table

Oval Brush Grommet - Specify code WOR, add \$86.00 list per table

1 grommet is factory installed in a predetermined position in the top.



WAVELINE

1 Grommet - Provide Location Print

Round Grommet - Specify code WRG, add \$68.00 list per table

Oval Brush Grommet - Specify code WOG, add \$86.00 list per table

1 oval brush grommet is factory installed in the top location based on specifier's print.



Legways

Cable Coil™

AVAILABLE ON

Specify code not applicable, standard / no charge per coil

The Cable Coil conducts wires from the underside of the top to the power and data source. It is attached to the undersurface of the top and hooks under the base ring. Finish is the same as the frame or base finish.

Cable Hook Legway \$106 / set of 2

Standard / No Charge

AVAILABLE ON BRATTICE PERFORMANCE WAVELINK Specify code **WCK** (Cable Hook Legway), add \$106.00 list per table

Cable Hook Legways are translucent plastic and slide up the leg from the bottom. Clips are located on the outside of the hook to carry the wires from the underside of the table top to the power and data source, while maintaining visibility of the wires.

NOTE CABLE HOOK LEGWAY (WCK) MAY BE SPECIFIED WITH ANY BASE USING A 2" DIAMETER ROUND COLUMN

Cable Hook Legway \$106 / set of 2

AVAILABLE ON

Specify code **WCH** (Cable Hook Legway), add \$106.00 list per table

Cable Hook Legways are translucent plastic and slide up the leg from the bottom. Clips are located on the outside of the hook to carry the wires from the underside of the table top to the power and data source, while maintaining visibility of the wires.



NOTE CABLE HOOK LEGWAY (WCH) MAY BE SPECIFIED WITH ANY BASE USING A 1 1/2" DIAMETER ROUND COLUMN

Canvas Legway \$89 / legway

AVAILABLE ON
BRATTICE
PERFORMANCE
TUSCANY
UNO²
VELA
WAVELINK

Specify code **WCL** (Canvas Legway), add \$89.00 list per legway

Canvas Legways conduct wires from the underside of the top to the power and data source near the floor.

SPECIFICATIONS

- Black cloth material
- $\circ~$ 1" inside diameter
- \circ Self-adhesive backing
- Upper and lower dual lock closure safety straps secure multiple wire bundles

NOTE CANVAS LEGWAY CAN BE INSTALLED ON ALL TABLE TYPES, INCLUDING FOLDING BASE TABLES

Plastic Legway \$70 / legway

AVAILABLE ON BRATTICE PERFORMANCE TUSCANY VELA WAVELINK Specify code **WRL** (Plastic Legway), add \$70.00 list per legway

Plastic Legways conduct wires from the underside of the top to the power and data source near the floor.

SPECIFICATIONS

- Black extruded rigid PVC plastic
- %" x 1" inside dimension on each of two (2) raceways
- · Snaps on and off for storage

NOTE PLASTIC LEGWAY MAY BE SPECIFIED WITH ANY BASE USING A 2" DIAMETER ROUND COLUMN

Wire Mesh Legway \$184 / pair

AVAILABLE ON VELA

Specify code **WML** (Wire Mesh Legway), required finish selection __ , add \$184.00 list per pair

Plastic channel with wire mesh insert routes cords and cables from underside of top to a power and data source near the floor. Legway snaps into T1 and TC bases and is shipped installed.



SPECIFICATIONS

- ° Black ⅓6" thick extruded rigid PVC plastic
- ° 2 channels, 1/8" x 1 3/4" inside diameter
- · Snaps on and off for storage

Wire Mesh X4 Insert

AVAILABLE ON VELA

Specify code **WMX** (Wire Mesh X4 Insert), required finish selection __ , add \$110.00 list each

Wire Mesh X4 Insert routes cords and cables from underside of top to a power and data source near the floor. Insert drops into position on X4 bases and is shipped installed.



SPECIFICATIONS

- o 22 gauge wire mesh
- o 3 1/8" inside diameter
- o Insert can only be removed by separating base and top

Wire Mesh Y3 Insert \$184 / pair

AVAILABLE ON VELA

Specify code **WMY** (Wire Mesh Y3 Insert), required finish selection __ , add \$184.00 list per pair

Wire Mesh Y3 Insert routes cords and cables from underside of top to a power and data source near the floor. Insert drops into position on Y3 bases and is shipped installed.



SPECIFICATIONS

- o 22 gauge wire mesh
- \circ 3 $\frac{1}{8}$ " inside diameter
- · Insert can only be removed by separating base and top

Wire Mesh T3 Insert \$110 / each

Specify code **WMT** (Wire Mesh T3 Insert), required finish selection ___ , add \$110.00 list each

Wire Mesh T3 Insert routes cords and cables from underside of top to a power and data source near the floor. Insert is riveted into position on T3 bases and is shipped installed.

SPECIFICATIONS

- · 22 gauge wire mesh
- o 3 1/8" inside diameter
- Insert is riveted to the column and cannot be easily removed





Manufacturer certifies that products meet applicable Underwriter's Laboratory and Intertek standards and testing.

Basket - Modesty Mount \$86 / basket

AVAILABLE ON BRATTICE PERFORMANCE VELA Specify code WBM (Basket - Modesty Mount), add \$86.00 list per basket

The modesty mount basket is J-shaped, made of form resistance welded wire and powder coated black. Inside dimensions are $2\,\%$ x $2\,\%$ ". Other options specified on the table dictate the length of the basket. Maximum length is 18". The wire basket can be located on the backside of the modesty panel.



Basket - Under Top Mount \$86 / basket

AVAILABLE ON
BRATTICE
ELEMENTS CONFERENCE
PERFORMANCE
VELA
WAVELINK

Specify code **WBT** (Basket - Under Top Mount), add \$86.00 list per basket

The under top mount basket is J-shaped, made of form resistance welded wire and powder coated black. Inside dimensions are 2 $\frac{1}{2}$ " x 2 $\frac{1}{2}$ ". Other options specified on the table dictate the length of the basket. Maximum length is 18".



Canvas - Under Top Mount \$204 / manager

AVAILABLE ON

Specify code **WCT** (Canvas - Under Top Mount), add \$204.00 list per table

The Under Top Mount Canvas wire manager is made of black canvas, with snap attachment to the underside of the table. The snap studs are installed to the underside of the table top on the approach side, when specified as a table option. The table tops are pre-drilled for field installation of the snap studs if the option is selected at a later date. The canvas wire manager runs the length of the table to channel wires from end to end. Excess cords from table top can be dropped into the front edge of the wire manager.

Plastic Runner - Under Top Mount \$147 / runner

AVAILABLE ON BRATTICE PERFORMANCE VELA WAVELINK Specify code **WRT** (Plastic Runner - Under Top Mount), add \$147.00 list per runner

The under top mount plastic runner is a J-shaped channel made of black PVC. Inside dimension is 1 %". Lengths coordinate with tables up to 96". The plastic runner mounts under the top, at the front edge (approach side) of the table.



Base Wire Access \$28 / access

AVAILABLE ON BRATTICE PERFORMANCE Specify code **BWA** (Base Wire Access), add \$28.00 list per access

The wire management access is available on fixed and tilting tables, 36 x 72 or smaller. Any table over 72" long must have 3 bases (either the two outer bases or only the middle base can be specified with the wire management access. T1 and X1 bases only.

NOTE NOT AVAILABLE ON TABLES WITH ADJUSTABLE PIN HEIGHT, PNEUMATIC ADJUSTABLE HEIGHT, OR MOTORIZED ADJUSTABLE HEIGHT BASES.

Eliga Power VERSTEEL

Henri Now linking systems require an HNPU power supply unit per each sequence. Specify code HNPU, \$403.00 list each.

- o 120" cord length
- 15 amp circuit
- o standard grounded plug
- o surge protection



Eliga Power - \$438 / unit

Specify code **EG_** (Eliga Power - Location_), add \$438.00 list per Eliga Power unit

The Eliga Power unit is factory installed and mounted in the frame of the Eliga sliding table and not in the table top.

SPECIFICATIONS

- One 10' cord, one 15 amp circuit, standard grounded plug
- · Surge protection
- · Two electrical outlets per unit



1 Eliga Power \$438 / table

Specify code **EG1** (1 Eliga Power unit), add \$438.00 list per table

One Eliga Power electrical unit is factory installed.

2 Eliga Power \$876 / table

Specify code **EG2** (2 Eliga Power unit), add \$876.00 list per table

Two Eliga Power electrical units are factory installed.

The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Essential Information

Like space planning with room configurations, we often receive requests to create power and data needs that one would assume are very easy. Below are some common questions that will help to define your needs and in turn will enable us to help you specify your tables.

Which Solution Best Fits Your Needs

Ask yourself some basic questions to help define your specific needs.

Is storage an issue? Some tables may be folded or tilted with certain power and data sources in position, while others may require that the power and data source be removed for these functions. Make sure you consider the space that you will need to store all the parts of your configurations.

Will you be moving your tables? If your tables are going to be utilized in varied locations, you will want to ensure that you can easily disconnect and reconnect your power and data. Table Link - Ends Only is included with Henri and Powerlink electrical package options to prevent the accidental disconnection of power supply to adjacent tables.

How will your tables be used? Power and data choice may depend upon whether your tables will be task-specific or multipurpose. A single use may have different requirements than a multi-use configuration. Remember to consider the need for wire management and modesty panels also.

Will your needs be changing? You don't always know what your specific needs will be in the future, but you may want the ability to add power and data at a later date.

Where is the power and data source for the room? Before any power and data is specified for a table, it is important to know where the power will be coming from in your room. If you are plugging into existing outlets then the power feed for the table must be within six feet (6') of the outlet.

Have you calculated the power load? Power loads are measured in amps (abbreviated form of amperes). Your circuits will only handle so many amps so you need to know what you can safely plug in without causing an overload situation. Use the worksheet on the next page for a general idea.

Selecting Your Power and Data Options

Select the best power and data option based on your particular need and application.



Henri

- ¬ pop-up feature is cool
- $\neg\,$ when not in use, there is nothing to obstruct the use of the table surface
- ¬ when popped-up, provides immediate access for laptop computers
- ¬ surface access for conference tables
- ¬ safe and easy to operate
- ¬ easy to set up and take down with tables
- ¬ voice and data connections built in
- ¬ plugs into a standard 15 amp grounded outlet plug



Powerlink Single Circuit

- ¬ choice of locations
 - · above surface, great for laptops
 - below surface facing out for semi-permanent computer applications (not available on some models)
 - below surface facing user with grommets for permanent computer applications (not available on some models)
- ¬ all the above can be changed without tools
- ¬ move power and data from table to table in different locations
- ¬ remove Powerlink and seat people on both sides of the table without interference
- ¬ integrated cable storage eliminates need for wire baskets or managers
- $\neg\;$ add Powerlink to Versteel tables in the future
- electrical sequencing direction can be changed by flipping internal power bars
- ¬ safe and easy to operate
- ¬ voice and data connections built in
- ¬ plugs into standard 15 amp grounded outlet plug

Alternate Power & Data Units

Alternate UL listed power and data units from other companies can be installed in Versteel tables. To ensure a proper fit in the top, supplier name, exact model number and cut-out template information must be provided with purchase order. When using power and data units from alternate sources, the table will not be UL listed.

The following are general guidelines only. Always refer to local codes for restrictions and requirements.

Amp Load Worksheet

Use this worksheet to get an approximate value of the amps you will be using. If there is any risk that the circuits may not be able to carry the load, contact a qualified electrician. Also, always consult any local codes or restrictions concerning power.

Worksheet EQUIPMENT QUANTITY AMP LOAD TOTAL

(National Electrical Code recommends less than or equal to 12 amps per power infeed)





Wiring of voice and data jacks is the sole responsibility of

the customer





Technical Specifications

Henri provides pop-up power and voice and data access. A built-in opening is provided for cables to be routed below the surface while up. Henri for linked table groups are powered from a single 9' cord, 15 amp standard grounded outlet plug with a circuit breaker and power surge protector. Voice and data plates can be ordered with one (1) high speed voice CAT3 and one (1) data CAT6 hardwire jacks as standard. LED light indicates when power is on. Optional data plates can be specified to accommodate other voice and data suppliers, contact Versteel Customer Service for details prior to order placement.

UL Listing requires the limitation of eight (8) Henri units (two plugs per Henri) on a single plug power entry.

Based on the National Electrical Code, it is not recommended to exceed a 12 amp equipment load per power infeed. See chart with amp load worksheet on page 56.

Each Henri is shipped installed in the table top and includes all necessary cables and cord mounting clips in order to complete the electrical installation. Henri is not retrofittable. However

, if a brush grommet has been previously installed in your table, then it is possible to insert a Henri at a future date.

Henri Planning and Locations

CONSIDER How many Henri units in each table?

Where are the power and data sources in the room?

Are the tables within a six foot (6') radius of the power sources?

What are the expected table configurations of the room? Provide a sketch of your table configuration indicating the power/data sources in the room and Versteel Customer Service will verify or help you specify the power/data solution that will best suit your needs.


Common table configurations with standard power and data locations may be found in the electrical planning section on pages 55-70.

Linking Examples

Location A H60A4R16 (4) 60" Tables, Linked, (1) Henri per table, Right Power

Location D H60D3R16 (3) 60" Tables, Linked, (2) Henri per table, Right Power

Location E H60D3R16 (3) 60" Tables, Linked, (2) Henri per table, Right Power



| Location | Description | Model # |
|--------------------|-------------------------------------|----------|
| | | |
| Locations A | (1) 42" Table, Right Power | H42A1R16 |
| | (2) 42" Tables, Linked, Right Power | H42A2R16 |
| | (3) 42" Tables, Linked, Right Power | H42A3R16 |
| | (4) 42" Tables, Linked, Right Power | H42A4R16 |
| | (5) 42" Tables, Linked, Right Power | H42A5R16 |
| | (6) 42" Tables, Linked, Right Power | H42A6R16 |
| | (7) 42" Tables, Linked, Right Power | H42A7R16 |
| | (8) 42" Tables, Linked, Right Power | H42A8R16 |
| Locations A | (1) 42" Table, Left Power | H42A1L16 |
| | (2) 42" Tables, Linked, Left Power | H42A2L16 |
| | (3) 42" Tables, Linked, Left Power | H42A3L16 |
| | (4) 42" Tables, Linked, Left Power | H42A4L16 |
| | (5) 42" Tables, Linked, Left Power | H42A5L16 |
| | (6) 42" Tables, Linked, Left Power | H42A6L16 |
| | (7) 42" Tables, Linked, Left Power | H42A7L16 |
| | (8) 42" Tables, Linked, Left Power | H42A8L16 |
| Locations A | (1) 48" Table, Right Power | H48A1R16 |
| | (2) 48" Tables, Linked, Right Power | H48A2R16 |
| | (3) 48" Tables, Linked, Right Power | H48A3R16 |
| | (4) 48" Tables, Linked, Right Power | H48A4R16 |
| | (5) 48" Tables, Linked, Right Power | H48A5R16 |
| | (6) 48" Tables, Linked, Right Power | H48A6R16 |
| | (7) 48" Tables, Linked, Right Power | H48A7R16 |
| | (8) 48" Tables, Linked, Right Power | H48A8R16 |
| Locations A | (1) 48" Table, Left Power | H48A1L16 |
| | (2) 48" Tables, Linked, Left Power | H48A2L16 |
| | (3) 48" Tables, Linked, Left Power | H48A3L16 |
| | (4) 48" Tables, Linked, Left Power | H48A4L16 |
| | (5) 48" Tables, Linked, Left Power | H48A5L16 |
| | (6) 48" Tables, Linked, Left Power | H48A6L16 |
| | (7) 48" Tables, Linked, Left Power | H48A7L16 |
| | (8) 48" Tables, Linked, Left Power | H48A8L16 |
| Locations A | (1) 60" Table, Right Power | H60A1R16 |
| | (2) 60" Tables, Linked, Right Power | H60A2R16 |
| | (3) 60" Tables, Linked, Right Power | H60A3R16 |
| | (4) 60" Tables, Linked, Right Power | H60A4R16 |
| | (5) 60" Tables, Linked, Right Power | H60A5R16 |
| | (6) 60" Tables, Linked, Right Power | H60A6R16 |
| | (7) 60" Tables, Linked, Right Power | H60A7R16 |
| | (8) 60" Tables, Linked, Right Power | H60A8R16 |



Location A H60A4L16, (4) 60" Tables, Linked, Left Power



A **H60A4L16** is a Henri sequence with four (4) 60" tables and the Henri units in Position A. Power enters from the user's left

Henri VERSTEEL

| Location | Description | Model # |
|--------------------|-------------------------------------|----------|
| | | |
| Locations A | (1) 60" Table, Left Power | H60A1L16 |
| | (2) 60" Tables, Linked, Left Power | H60A2L16 |
| | (3) 60" Tables, Linked, Left Power | H60A3L16 |
| | (4) 60" Tables, Linked, Left Power | H60A4L16 |
| | (5) 60" Tables, Linked, Left Power | H60A5L16 |
| | (6) 60" Tables, Linked, Left Power | H60A6L16 |
| | (7) 60" Tables, Linked, Left Power | H60A7L16 |
| | (8) 60" Tables, Linked, Left Power | H60A8L16 |
| Locations D | (1) 60" Table, Right Power | H60D1R16 |
| | (2) 60" Tables, Linked, Right Power | H60D2R16 |
| | (3) 60" Tables, Linked, Right Power | H60D3R16 |
| | (4) 60" Tables, Linked, Right Power | H60D4R16 |
| Locations D | (1) 60" Table, Left Power | H60D1L16 |
| | (2) 60" Tables, Linked, Left Power | H60D2L16 |
| | (3) 60" Tables, Linked, Left Power | H60D3L16 |
| | (4) 60" Tables, Linked, Left Power | H60D4L16 |
| Locations D | (1) 72" Table, Right Power | H72D1R16 |
| | (2) 72" Tables, Linked, Right Power | H72D2R16 |
| | (3) 72" Tables, Linked, Right Power | H72D3R16 |
| | (4) 72" Tables, Linked, Right Power | H72D4R16 |
| Locations D | (1) 72" Table, Left Power | H72D1L16 |
| | (2) 72" Tables, Linked, Left Power | H72D2L16 |
| | (3) 72" Tables, Linked, Left Power | H72D3L16 |
| | (4) 72" Tables, Linked, Left Power | H72D4L16 |
| Locations E | (1) 60" Table, Right Power | H60E1R16 |
| | (2) 60" Tables, Linked, Right Power | H60E2R16 |
| | (3) 60" Tables, Linked, Right Power | H60E3R16 |
| | (4) 60" Tables, Linked, Right Power | H60E4R16 |
| Locations E | (1) 60" Table, Left Power | H60E1L16 |
| | (2) 60" Tables, Linked, Left Power | H60E2L16 |
| | (3) 60" Tables, Linked, Left Power | H60E3L16 |
| | (4) 60" Tables, Linked, Left Power | H60E4L16 |
| Locations E | (1) 72" Table, Right Power | H72E1R16 |
| | (2) 72" Tables, Linked, Right Power | H72E2R16 |
| | (3) 72" Tables, Linked, Right Power | H72E3R16 |
| | (4) 72" Tables, Linked, Right Power | H72E4R16 |
| | | |
| | | |
| | | |

| Location | Description | Model # |
|--------------------|--|----------|
| | T | |
| Locations E | (1) 72" Table, Left Power | H72E1L16 |
| | (2) 72" Tables, Linked, Left Power | H72E2L16 |
| | (3) 72" Tables, Linked, Left Power | H72E3L16 |
| | (4) 72" Tables, Linked, Left Power | H72E4L16 |
| ocations E | (1) 84" Table, Right Power | H84E1R16 |
| | (2) 84" Tables, Linked, Right Power | H84E2R16 |
| | (3) 84" Tables, Linked, Right Power | H84E3R16 |
| | (4) 84" Tables, Linked, Right Power | H84E4R16 |
| ocations E | (1) 84" Table, Left Power | H84E1L16 |
| | (2) 84" Tables, Linked, Left Power | H84E2L16 |
| | (3) 84" Tables, Linked, Left Power | H84E3L16 |
| | (4) 84" Tables, Linked, Left Power | H84E4L16 |
| ocations E | (1) 96" Table, Right Power | H96E1R16 |
| | (2) 96" Tables, Linked, Right Power | H96E2R16 |
| | (3) 96" Tables, Linked, Right Power | H96E3R16 |
| | (4) 96" Tables, Linked, Right Power | H96E4R16 |
| ocations E | (1) 96" Table, Left Power | H96E1L16 |
| | (2) 96" Tables, Linked, Left Power | H96E2L16 |
| | (3) 96" Tables, Linked, Left Power | H96E3L16 |
| | (4) 96" Tables, Linked, Left Power | H96E4L16 |
| | For TIM Meeting Only | |
| ocations F | (1) 72" Table, Right Power | H72F1R16 |
| | (1) 84" Table, Right Power | H84F1R16 |
| | (1) 96" Table, Right Power | H96F1R16 |
| Locations F | (1) 72" Table, Left Power | H72F1L16 |
| | (1) 84" Table, Left Power | H84F1L16 |
| | (1) 96" Table, Left Power | H96F1L16 |
| Locations H | (1) 72" Table, Right Power | H72H1R16 |
| Locations II | (1) 84" Table, Right Power | H84H1R16 |
| | (1) 96" Table, Right Power | H96H1R16 |
| | | H72H1L16 |
| Locations H | (1) 72" Table, Left Power (1) 84" Table, Left Power | H84H1L16 |
| | (1) 96" Table, Left Power | H96H1L16 |
| | (1) 30 Table, Lett Towel | HOUTTETO |
| | | |
| | | |
| | | |
| | | |
| | | |



Location D H60D3L16, (3) 60" Tables, Linked, Left Power

| H | 60 | D | 3 | L16 |
|-------|--------------|-----------------------|------------------------------------|--------------------------------|
| Henri | Table Length | Locations in Table | Number of Tables in Sequence | Direction of Power Entry |

A **H60D3L16** is a Henri sequence with three (3) 60" tables and the Henri units in Position D. Power enters from the user's left.



A H60E3L16 is a Henri sequence with three (3) 60" tables and the Henri units in Position E. Power enters from the user's left.

Custom Location Print

Below are three easy steps for supplying a print that places Power & Data units in a custom location.

Sten 1

Indicate where you want your Power & Data units located in the top. Use center lines for marking positions. Versteel will review your location requests to make sure that they do not interfere with base locations and their attachment.

Step 2


Indicate the face of all Power & Data units to determine which way the power outlets, voice jacks and data jacks will be accessed.

Step 3

Indicate where the Power & Data sources are located within the space. The orientation of the table(s) within the space will also help to determine the best possible access point.

It's that simple. Call Versteel Customer Service if you have any questions regarding Power & Data Custom Locations.


Boatshape conference table with four units. Power is located in the center of the table and the units alternate sides facing the users.



Square table with four units. Power is located to the side of the table and the units each face a user.




Two (2) square tables linked with two (2) units each. Power is located to the side of the table and the units face outwards.



Sample Print

Special Electrical four (4) units located in one (1) table on the center line of the table with 30" between units.

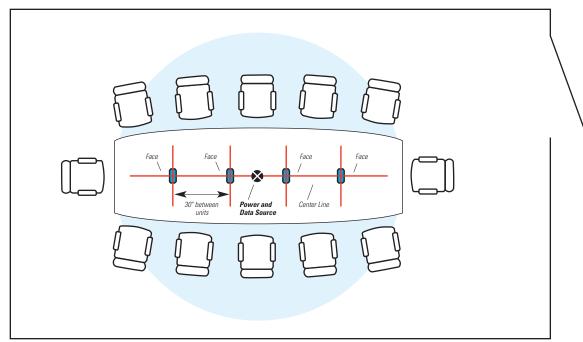

Wiring of voice and data jacks is the sole responsibility of the customer

Single Circuit Powerlink Technical Specifications

Powerlink provides horizontal power, voice and data access as well as cable management.

Powerlink Single Circuit system allows several tables to be powered from a single 15 amp standard grounded outlet plug which will power up to eight (8) duplex outlets per sequence. Circuit breakers and power surge protectors for single or sequenced Powerlinks are at the infeed.

UL Listing requires the limitation of eight (8)
Powerlink 42" and 48" length (two plugs per
Powerlink) or four (4) Powerlink 60", 72", 84" and
96" length (4 plugs per Powerlink) on a single plug
power entry.

Single Circuit and Powerlink Technical Specifications

Voice and data plates are installed in the Powerlink cover with one (1) high speed voice CAT3 and one (1) data CAT6 hardwire jacks as standard. Data plates can be specified to accommodate other voice and data suppliers, contact Versteel Customer Service for details prior to order placement.

Mounting lever locks are factory installed in the bottom front edge of the table. Powerlink installs without the use of tools, in the above table top facing user, below table top facing out or below table top facing user positions.

Each Powerlink unit includes all necessary hardwire connection or flex conduit jumpers, covers and hardware to complete the electrical installation.

Powerlink may be retrofitted to Versteel Class E tables only. Check your Versteel table product label located on the underside of the table top to determine if your table is Class E.

Based on the National Electrical Code, it is not recommended to exceed a 12 amp equipment load per power infeed. See amp load worksheet on page 56.

Planning and Locations

Provide a sketch of your table configuration indicating the power/data sources in the room and Versteel Customer Service will help you specify the power/data solution that will best suit your needs.

Common table configurations with standard power and data locations may be found in the electrical planning section on pages 55-70. Powerlink will always be top mounted facing user unless specified differently.

Powerlink Single Circuit with power infeed. Face drops to allow easy access to wire management channels and linking connections.



Powerlink with sequencing connection mounted above table top, facing user.



Powerlink mounted below table top, facing out.



Powerlink with sequencing connection mounted below table top, facing user.



Powerlink can be repositioned in any of the above positions by using the Powerlink lever lock. No tools are required




CONSIDER Where are the power

of the room?

and data sources

located in the room?

What are the expected table configurations



| Circuit | Description | Model # | Circuit | Description | Model # |
|---------|-------------------------------------|--------------|---------|-------------------------------------|--------------|
| Single | (1) 42" Table, Right Power | P1-42P1R16 | Cinglo | (1) 60" Table Left Power | P1-60P1L16 |
| Single | , , | | Single | (1) 60" Table, Left Power | |
| | (2) 42" Tables, Linked, Right Power | P1-42P2R16 | | (2) 60" Tables, Linked, Left Power | P1-60P2L16 |
| | (3) 42" Tables, Linked, Right Power | P1-42P3R16 | | (3) 60" Tables, Linked, Left Power | P1-60P3L16 |
| | (4) 42" Tables, Linked, Right Power | P1-42P4R16 | | (4) 60" Tables, Linked, Left Power | P1-60P4L16 |
| | (5) 42" Tables, Linked, Right Power | P1-42P5R16 | Single | (1) 72" Table, Right Power | P1-72P1R16 |
| | (6) 42" Tables, Linked, Right Power | P1-42P6R16 | | (2) 72" Tables, Linked, Right Power | P1-72P2R16 |
| | (7) 42" Tables, Linked, Right Power | P1-42P7R16 | | (3) 72" Tables, Linked, Right Power | P1-72P3R16 |
| | (8) 42" Tables, Linked, Right Power | P1-42P8R16 | | (4) 72" Tables, Linked, Right Power | P1-72P4R16 |
| Single | (1) 42" Table, Left Power | P1-42P1L16 | Single | (1) 72" Table, Left Power | P1-72P1L16 |
| | (2) 42" Tables, Linked, Left Power | P1-42P2L16 | Unigio | (2) 72" Tables, Linked, Left Power | P1-72P2L16 |
| | (3) 42" Tables, Linked, Left Power | P1-42P3L16 | | (3) 72" Tables, Linked, Left Power | P1-72P3L16 |
| | (4) 42" Tables, Linked, Left Power | P1-42P4L16 | | (4) 72" Tables, Linked, Left Power | P1-72P4L16 |
| | (5) 42" Tables, Linked, Left Power | P1-42P5L16 | | | |
| | (6) 42" Tables, Linked, Left Power | P1-42P6L16 | Single | (1) 84" Table, Right Power | P1-84P1R16 |
| | (7) 42" Tables, Linked, Left Power | P1-42P7L16 | | (2) 84" Tables, Linked, Right Power | P1-84P2R16 |
| | (8) 42" Tables, Linked, Left Power | P1-42P8L16 | | (3) 84" Tables, Linked, Right Power | P1-84P3R16 |
| Cinalo | /1) 40" Toble Dight Dower | D1 40D1D16 | | (4) 84" Tables, Linked, Right Power | P1-84P4R16 |
| Single | (1) 48" Table, Right Power | P1-48P1R16 | Single | (1) 84" Table, Left Power | P1-84P1L16 |
| | (2) 48" Tables, Linked, Right Power | P1-48P2R16 | - | (2) 84" Tables, Linked, Left Power | P1-84P2L16 |
| | (3) 48" Tables, Linked, Right Power | P1-48P3R16 | | (3) 84" Tables, Linked, Left Power | P1-84P3L16 |
| | (4) 48" Tables, Linked, Right Power | P1-48P4R16 | | (4) 84" Tables, Linked, Left Power | P1-84P4L16 |
| | (5) 48" Tables, Linked, Right Power | P1-48P5R16 | 0: 1 | /4\ 00 T | D4 00D4 D4 0 |
| | (6) 48" Tables, Linked, Right Power | P1-48P6R16 | Single | (1) 96" Table, Right Power | P1-96P1R16 |
| | (7) 48" Tables, Linked, Right Power | P1-48P7R16 | | (2) 96" Tables, Linked, Right Power | P1-96P2R16 |
| | (8) 48" Tables, Linked, Right Power | P1-48P8R16 | | (3) 96" Tables, Linked, Right Power | P1-96P3R16 |
| Single | (1) 48" Table, Left Power | P1-48P1L16 | | (4) 96" Tables, Linked, Right Power | P1-96P4R16 |
| | (2) 48" Tables, Linked, Left Power | P1-48P2L16 | Single | (1) 96" Table, Left Power | P1-96P1L16 |
| | (3) 48" Tables, Linked, Left Power | P1-48P3L16 | | (2) 96" Tables, Linked, Left Power | P1-96P2L16 |
| | (4) 48" Tables, Linked, Left Power | P1-48P4L16 | | (3) 96" Tables, Linked, Left Power | P1-96P3L16 |
| | (5) 48" Tables, Linked, Left Power | P1-48P5L16 | | (4) 96" Tables, Linked, Left Power | P1-96P4L16 |
| | (6) 48" Tables, Linked, Left Power | P1-48P6L16 | | | |
| | (7) 48" Tables, Linked, Left Power | P1-48P7L16 | | | |
| | (8) 48" Tables, Linked, Left Power | P1-48P8L16 | | | |
| Single | (1) 60" Table, Right Power | P1-60P1R16 | | | |
| Jingio | (2) 60" Tables, Linked, Right Power | P1-60P2R16 | | | |
| | (3) 60" Tables, Linked, Right Power | P1-60P3R16 | | | |
| | (4) 60" Tables, Linked, Right Power | P1-60P4R16 | | | |
| | (1) 00 Tables, Elliked, Higher Owel | 11 001 41110 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



Powerlink Sequence P1-42P4L18

P1- 42P Augle Circuit Table Length Powerlink Powered of Tables of Power Sequenced Entry

A P1-42P4L16 is a Sequenced Powerlink unit using a single circuit on a sequence of four (4) 42" tables. Power enters from the user's left.



Powerlink Sequence P1-60P3L16

P1- 60P 3 L16
Single Circuit Table Length Powerlink Powered of Tables of Power

A **P1-60P3L16** is a Sequenced Powerlink unit using a single circuit on a sequence of three (3) 60" tables. Power enters from the user's left.

Powerlink Single Circuit for Arc Rectangle

| Circuit | Description | Model # |
|---------|-------------------------------------|---------------|
| | | |
| Single | (1) 42" Table, Right Power | P1-42P1R16-AR |
| | (2) 42" Tables, Linked, Right Power | P1-42P2R16-AR |
| | (3) 42" Tables, Linked, Right Power | P1-42P3R16-AR |
| | (4) 42" Tables, Linked, Right Power | P1-42P4R16-AR |
| | (5) 42" Tables, Linked, Right Power | P1-42P5R16-AR |
| | (6) 42" Tables, Linked, Right Power | P1-42P6R16-AR |
| | (7) 42" Tables, Linked, Right Power | P1-42P7R16-AR |
| | (8) 42" Tables, Linked, Right Power | P1-42P8R16-AR |
| Single | (1) 42" Table, Left Power | P1-42P1L16-AR |
| | (2) 42" Tables, Linked, Left Power | P1-42P2L16-AR |
| | (3) 42" Tables, Linked, Left Power | P1-42P3L16-AR |
| | (4) 42" Tables, Linked, Left Power | P1-42P4L16-AR |
| | (5) 42" Tables, Linked, Left Power | P1-42P5L16-AR |
| | (6) 42" Tables, Linked, Left Power | P1-42P6L16-AR |
| | (7) 42" Tables, Linked, Left Power | P1-42P7L16-AR |
| | (8) 42" Tables, Linked, Left Power | P1-42P8L16-AR |
| Single | (1) 48" Table, Right Power | P1-48P1R16-AR |
| | (2) 48" Tables, Linked, Right Power | P1-48P2R16-AR |
| | (3) 48" Tables, Linked, Right Power | P1-48P3R16-AR |
| | (4) 48" Tables, Linked, Right Power | P1-48P4R16-AR |
| | (5) 48" Tables, Linked, Right Power | P1-48P5R16-AR |
| | (6) 48" Tables, Linked, Right Power | P1-48P6R16-AR |
| | (7) 48" Tables, Linked, Right Power | P1-48P7R16-AR |
| | (8) 48" Tables, Linked, Right Power | P1-48P8R16-AR |
| Single | (1) 48" Table, Left Power | P1-48P1L16-AR |
| | (2) 48" Tables, Linked, Left Power | P1-48P2L16-AR |
| | (3) 48" Tables, Linked, Left Power | P1-48P3L16-AR |
| | (4) 48" Tables, Linked, Left Power | P1-48P4L16-AR |
| | (5) 48" Tables, Linked, Left Power | P1-48P5L16-AR |
| | (6) 48" Tables, Linked, Left Power | P1-48P6L16-AR |
| | (7) 48" Tables, Linked, Left Power | P1-48P7L16-AR |
| | (8) 48" Tables, Linked, Left Power | P1-48P8L16-AR |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| Circuit | Description | Model # |
|---------|-------------------------------------|--------------------------------|
| 0: 1 | (V) 001 T 1 1 | D. 00D.D.0 AD |
| Single | (1) 60" Table, Right Power | P1-60P1R16-AR |
| | (2) 60" Tables, Linked, Right Power | P1-60P2R16-AR |
| | (3) 60" Tables, Linked, Right Power | P1-60P3R16-AR P1-60P4R16-AR |
| | (4) 60" Tables, Linked, Right Power | |
| Single | (1) 60" Table, Left Power | P1-60P1L16-AR |
| | (2) 60" Tables, Linked, Left Power | P1-60P2L16-AR |
| | (3) 60" Tables, Linked, Left Power | P1-60P3L16-AR |
| | (4) 60" Tables, Linked, Left Power | P1-60P4L16-AR |
| Single | (1) 72" Table, Right Power | P1-72P1R16-AR |
| | (2) 72" Tables, Linked, Right Power | P1-72P2R16-AR |
| | (3) 72" Tables, Linked, Right Power | P1-72P3R16-AR |
| | (4) 72" Tables, Linked, Right Power | P1-72P4R16-AR |
| Single | (1) 72" Table, Left Power | P1-72P1L16-AR |
| 5 | (2) 72" Tables, Linked, Left Power | P1-72P2L16-AR |
| | (3) 72" Tables, Linked, Left Power | P1-72P3L16-AR |
| | (4) 72" Tables, Linked, Left Power | P1-72P4L16-AR |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |



P1- 42P 4. L16 AR
Single Circuit Table Length Powerlank Powered of Tables Of Power Top Shape

Powerlink Sequence P1-42P4L16-AR

A P1-42P4L16AR is a Sequenced Powerlink unit using a single circuit on a sequence of four (4) 42" tables. Power enters from the user's left, for use with the arc rectangle top shape



Powerlink Sequence P1-60P3L16AR

P1- 60P 3 L16 AR
Single Circuit Table Length Powerlink Powered of Tables Sequenced Entry

AR AR
Arc Rectangle of Fower Top Shape

A **P1-60P4L16AR** is a Sequenced Powerlink unit using a single circuit on a sequence of four (4) 42* tables. Power enters from the user's left, for use with the arc rectangle top shape



Power Source Outlet

Power Source Outlets provide power access to individual tables through a single circuit with one (1) 10' cord and a standard grounded plug. Power Source Outlets have six (6) grounded electrical outlets per unit with surge protection and are controlled by an illuminated On/Off switch. Unit is field installed and retrofittable.

Planning and Locations

Provide a sketch of your table configuration indicating the power/data sources in the room and Versteel Customer Service will help you specify the power/data solution that will best suit your needs.

Configurations

Configuration 1

The configurations illustrated on these pages are meant to show possible options using similar power sources.

Henri Location E or Powerlink Single Circuit

A classroom or training room with double aisles consisting of two (2) groups (outer) and an instructor's table, each with an individual power supply. Each set of linked tables in the center section has its own power supply.

FURNITURE QUANTITY Tables (24" x 60") 22 Chairs 42

Location A

Location **D**



Henri Power and Data, Location E Option

(3) 60" tables, linked, left power

| | DESCRIPTION | QUANTITY |
|---|----------------------------|----------|
| Α | H60E1R16 | 2 |
| | Henri Location E | |
| | (1) 60" table, right power | |
| В | H60E1L16 | 3 |
| | Henri Location E | |
| | (1) 60" table, left power | |
| C | H60E3L16 | 2 |
| | Henri Location E | |

Powerlink Power and Data, Single Circuit Option


| DESCRIPTION | QUANTITY |
|------------------------------------|--|
| P1-60P1R16 | 2 |
| Powerlink Single Circuit | |
| (1) 60" table, right power | |
| P1-60P1L16 | 3 |
| Powerlink Single Circuit | |
| (1) 60" table, left power | |
| P1-60P3L16 | 2 |
| Powerlink Single Circuit | |
| (3) 60" tables, linked, left power | |
| | P1-60P1R16 Powerlink Single Circuit (1) 60" table, right power P1-60P1L16 Powerlink Single Circuit (1) 60" table, left power P1-60P3L16 Powerlink Single Circuit |




POWER

The shaded sphere has a six foot (6') radius to indicate the length of the power cord at floor level.

The black center references the power source location.

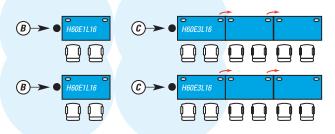



SCALE


Approximate scale for measuring is 3/32.


CONSIDER

What is the purpose of the room?

Where are the power and data sources in the room?

Are the tables within a six foot (6') radius of

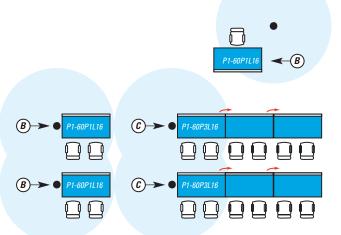



QUANTITY

6

12

Configuration 2

The configurations illustrated on these pages are meant to show possible options using similar power sources.

Henri Location E

A U-shaped linking configuration for conferencing or training. Three linked table groups are powered from floor monuments.

Henri Power and Data, Location E Option

Location A



| Location E | |
|-------------------|--|
| 0 | |

DESCRIPTION QUANTITY H60E2L16 Henri Location E (2) 60" tables, linked, left power H60E2R16 3

Henri Location E (2) 60" tables, linked, right power

Configuration 3

Powerlink Single Circuit

A classroom or training room created from a long narrow room. All the power is located on a side wall of the room, with the exception of the instructor's table which has its own power monument in the floor.

Powerlink Power and Data, Single Circuit Option

POWER

The shaded sphere has a six foot (6') radius to indicate the length of the power cord at floor level.

The black center references the power source location.



SCALE

Approximate scale for measuring is 3/32.

CONSIDER

What is the purpose of the room?

Where are the power sources in the room?

Are the tables within a six foot (6') radius of the power sources?

DESCRIPTION QUANTITY P1-60P2R16 3 Powerlink Single Circuit (2) 60" tables, linked, right power

P1-60P1R16 Powerlink Single Circuit (1) 60" table, right power

1

FURNITURE


FURNITURE

Chairs

Tables (24" x 60")

Tables (24" x 60") Chairs

QUANTITY 14





Configurations VERSTEEL

Configuration 4

The configurations illustrated on these pages are meant to show possible options using similar power sources.

Henri Location A or Henri Location E

A classroom or training room occupying a large center section of linked tables with two (2) possible power supplies. The instructor's table has an individual power supply.

Henri Power and Data, Location A Option

| | Location A |
|---|-------------------|
| | 0 |
| | |
| | Location D |
| 0 | 0 |

Location **E**

Are the tables within a six foot (6') radius of


В


| DESCRIPTION | | QUANTITY |
|--------------------|------------------|----------|
| H60A5L16 | | 4 |
| Henri Location A | A | |
| (5) 60" tables, li | nked, left power | |
| H60A1L16 | | 1 |
| Henri Location A | A | |
| (1) 60" table, lef | t power | |

| FURNITURE | QUANTITY |
|--------------------|----------|
| Tables (24" x 60") | 21 |
| Chairs | 41 |

Henri Power and Data, Location E Option

| | DESCRIPTION | QUANTITY |
|---|------------------------------------|----------|
| C | H60E3L16 | 4 |
| | Henri Location E | |
| | (3) 60" tables, linked, left power | |
| D | H60E2L16 | 4 |
| | Henri Location E | |
| | (2) 60" tables, linked, left power | |
| E | H60E1L16 | 1 |
| | Henri Location E | |
| | (1) 60" table, left power | |

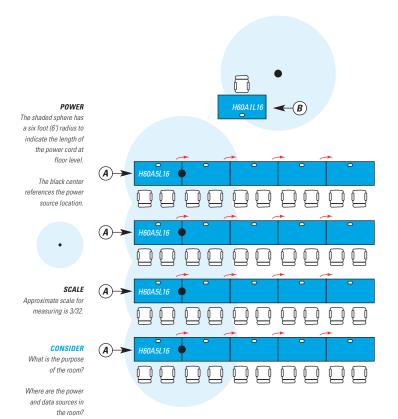

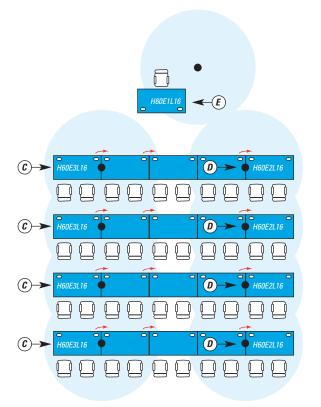

Configuration 5

Henri Location A or Henri Location E

A large conference or meeting area formed by linked tables and wedge tops. Two (2) power sources feed the four (4) power and data sequences.

POWER

The shaded sphere has a six foot (6') radius to indicate the length of the power cord at floor level.

The black center references the power source location.

Henri Power and Data, Location A Option

(5) 60" tables, linked, right power

DESCRIPTIONQUANTITYSpecial Electrical Package2Henri Location A



SCALE


Approximate scale for measuring is 3/32.

CONSIDER

What is the purpose of the room?

Where are the power sources in the room?


Are the tables within a six foot (6') radius of the power sources?

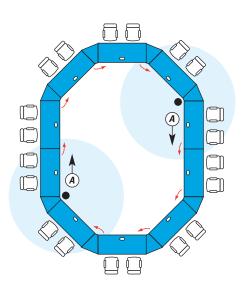

| FURNITURE | QUANTITY |
|------------------------|----------|
| Tables (24" x 60") | 10 |
| Tables (45° 24" wedge) | 8 |
| Chairs | 20 |

Henri Power and Data, Location E Option

| | DESCRIPTION | QUANTITY |
|---|-------------------------------------|----------|
| В | Special Electrical Package | 2 |
| | Henri Location E | |
| | (3) 60" tables, linked, right power | |
| C | Special Electrical Package | 2 |
| | Henri Location E | |
| | (2) 60" tables linked left nower | |

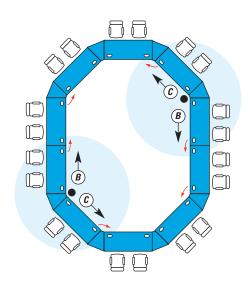

Power & Data Planning

Configurations **VERSTEEL**

Configuration 6

The configurations illustrated on these pages are meant to show possible options using similar power sources.

Henri Location E

A large classroom or training room with side aisles. The room consists of six (6) rows of tables. Power and data is supplied from a floor grid.

Henri Power and Data Option (Location E)

Location A



Location **D**

Location **E**

DESCRIPTION QUANTITY H60E2L16 6 (2) 60" tables, linked, left power 6 H60E2R16 (2) 60" tables, linked, right power

FURNITURE QUANTITY Tables (24" x 60") 24 Tables (24" quarter round) 4 Chairs 48

POWER

The shaded sphere has a six foot (6') radius to indicate the length of the power cord at floor level.

The black center references the power source location.



SCALE


Approximate scale for measuring is 3/32.

CONSIDER

What is the purpose of the room?

Where are the power and data sources in the room?

Are the tables within a six foot (6') radius of

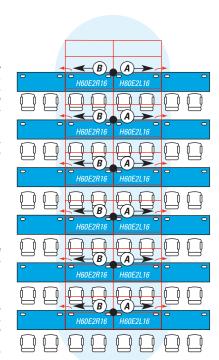

Configuration 7

The configurations illustrated on these pages are meant to show possible options using similar power sources.

Powerlink Single Circuit (for arc rectangle top shape)

An amphitheater style classroom or training room with a single aisle. Power sources are located along the aisle and service linked tables with hardwired multicircuit power. Instructor table has its own single circuit outlet power supply.

Powerlink Power and Data, Single Circuit Option

| | DESCRIPTION | QUANTITY |
|---|-------------------------------------|----------|
| Α | P1-60P3R-AR16 | 4 |
| | Powerlink Single Circuit for | |
| | Arc Rectangle top shape | |
| | (3) 60" Tables, Linked, Right Power | |

- B P1-60P3L-AR16
 Powerlink Single Circuit for
 Arc Rectangle top shape
 (3) 60" Tables, Linked, Left Power
 - P1-60P2R-AR16
 Powerlink Single Circuit for
 Arc Rectangle top shape
 (2) 60" Tables, Linked, Right Power

| FURNITURE | QUANTITY |
|--------------------|----------|
| Tables (24" x 60") | 26 |
| Chairs | 52 |

POWER

The shaded sphere has a six foot (6') radius to indicate the length of the power cord at floor level.

The black center references the power source location.



SCALE


Approximate scale for measuring is 3/32.

CONSIDER

What is the purpose of the room?

Where are the power sources in the room?

Are the tables within a six foot (6') radius of the power sources?

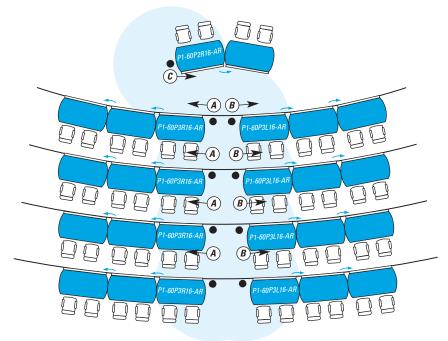

4

1

Connecting Data/Voice Systems To Your Network Grid

Connecting Data/Voice Systems To Your Network Grid

Multiple options are available when specifying data/voice connections for power/data systems in Versteel tables. The appropriate option is dependent upon your specific application.



UNWIRED CONNECTIONS

Unwired data/voice connections need to be wired by the customer's IT department, or an outside IT provider. Unwired connections are "standard" for the following products:

- ¬ Henri/Henri Now
- ¬ Powerlink
- ¬ Power Bay
- ¬ Powered Form Modesty

(Unwired connections are optional for all other power/data systems offered by Versteel.)



PREWIRED CONNECTIONS

Prewired data/voice connections terminate with a "male" patch cable connector on the end. This enables the unit to be plugged directly into a data wall plate. A 10' cable is standard for data connections, and a 7' cable is standard for voice connections. Prewired connections are "standard" for the following products:

- ¬ Axil Z
- ¬ Ellora
- \neg Mho
- ¬ Node



DATA COUPLERS

Installed directly in the power/data unit, couplers are "female" jacks that allow units to be connected to a data wall plate with a standard data patch cable (with "male" jacks on each end). This is a convenient option for tables that will be moved frequently.

Data Couplers are available on all power/data units, excluding Henri and Henri Now (Henri Quick Connect provides the same functionality as a data coupler for Henri and Henri Now).



VERSTEEL

| Black = Fixed Bases | Questions? | | top edge | | | Laminate T-Mold | Laminate Wood | Laminate Soft PVC | Veneer Wood |
|--|---------------------|--------------------------|-----------------------------------|--------|----|--------------------|------------------|----------------------|----------------|
| Page | 1.800.876.2120 | | | Flat | t | Convex | Flat | Bumper | Flat |
| Page | | | | | | | | | |
| Page | | | | | | | | | |
| Cop Thickness 1 Nr | Black = Fixed Bases | | edge ordering code (radius corner | or | | LT2 | or | LB2R | or |
| Puted Pute | | | | | | 1 1/4" | | 1 1/4" | |
| Base Style Table Description Model # Wt | | | top tilickness | | | 1 /* | | 1 /4 | |
| Base Style Table Description Total Descr | | | | Tide | ,u | | Tidted | | Tidica |
| Base Style Table Description | | | | | | | | | |
| Table Description | | | edge ordering code (radius corner | > LPF2 | 2R | | | | VWF2R |
| Square Foot Table Description Model # WY Square Foot 24 x 36 Crank Agi Height AHTS 2436R CR 90 1674 1903 2527 2895 24 x 48 Crank Agi Height AHTS 2442R CR 95 1707 1957 2895 24 x 48 Crank Agi Height AHTS 2442R CR 95 1707 1957 2895 24 x 48 Crank Agi Height AHTS 2442R CR 95 1756 2041 2795 24 x 56 Crank Agi Height AHTS 2454R CR 104 1881 2243 3263 24 x 60 Crank Agi Height AHTS 2456R CR 109 1897 2272 3268 24 x 60 Crank Agi Height AHTS 2456R CR 114 1959 2371 3581 24 x 72 Crank Agi Height AHTS 3045R CR 119 1981 2411 3586 30 x 36 Crank Agi Height AHTS 3045R CR 19 1873 2167 3073 30 x 42 Crank Agi Height AHTS 3045R CR 110 1912 2232 3311 30 x 48 Crank Agi Height AHTS 3045R CR 111 1925 2251 3472 30 x 54 Crank Agi Height AHTS 3045R CR 117 2007 2389 4108 30 x 36 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 30 x 72 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 30 x 72 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 30 x 72 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 30 x 72 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 30 x 72 Crank Agi Height AHTS 3056R CR 129 2140 2609 4336 2527 24 x 48 Crank Agi Height AHTS 3056R CR 19 1575 2695 2654 2795 24 x 48 Crank Agi Height AHTR 2435R CR 99 1575 2041 2795 2695 24 x 26 Crank Agi Height AHTR 2456R CR 109 1697 2272 3268 24 x 50 Crank Agi Height AHTR 2456R CR 109 1697 2272 3268 24 x 50 Crank Agi Height AHTR 2456R CR 109 1697 2272 3268 24 x 50 Crank Agi Height AHTR 2456R CR 109 1697 2272 3268 30 x 42 Crank Agi Height AHTR 3045R CR 109 1697 2272 3268 30 x 42 Crank Agi Height AHTR 3045R CR 109 1697 2272 3268 30 x 42 Crank Agi Height AHTR 3045R CR 110 1912 2232 3311 30 x 45 Crank Agi Height AHTR 3045R CR 110 110 110 110 110 | | | edge ordering code (square corner | | | | | | |
| Square Foot | | | | | | 178 | | 7.II | |
| 24 x 42 Crank Adj Height AHTS 2442RE CR 95 1707 1957 2695 274 x 84 Crank Adj Height AHTS 2449RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTS 2454RE CR 104 1881 2243 3263 24 x 54 Crank Adj Height AHTS 2454RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTS 2456RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTS 2454RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTS 3036RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTS 3036RE CR 119 1981 22232 3311 30 x 42 Crank Adj Height AHTS 3048RE CR 117 1925 2232 3311 30 x 42 Crank Adj Height AHTS 3048RE CR 111 1925 2232 3311 30 x 45 Crank Adj Height AHTS 3054RE CR 117 2007 2389 4108 30 x 50 Crank Adj Height AHTS 3056RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4560 4 | Base Style | Table Description | | | 1 | 1/4" | 1 | /4" | 1 1/4" |
| 24 x 48 Crank Adj Height AHTS 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTS 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTS 2456RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTS 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTS 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTS 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTS 3048RE CR 119 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3046RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3066RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 199 1674 1993 2527 24 x 42 Crank Adj Height AHTS 442RE CR 95 1707 1957 2695 24 x 42 Crank Adj Height AHTS 442RE CR 99 1758 2041 2795 24 x 60 Crank Adj Height AHTS 442RE CR 109 1897 2272 3268 24 x 60 Crank Adj Height AHTS 4466RE CR 109 1897 2272 3268 30 x 36 Crank Adj Height AHTS 4466RE CR 119 1991 2411 3586 30 x 36 Crank Adj Height AHTS 4466RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 4466RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 4466RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3046RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3046RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3046RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3046RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3046RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3066RE CR 119 1991 2411 3586 30 x 42 Crank Adj Height AHTS 3066RE CR 111 1925 2251 3472 4472 Crank Adj Height AHTS 3066RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3066RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3066RE CR 129 2140 2 | Square Foot | 24 x 36 Crank Adj Height | AHTS 2436RE CR | 90 | 16 | 674 | 19 | 03 | 2527 |
| 24 x 54 Crank Adj Height AHTS 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTS 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTS 2460RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTS 2456RE CR 114 1959 2371 3581 326 24 x 66 Crank Adj Height AHTS 3046RE CR 199 18873 2167 3073 30 x 32 Crank Adj Height AHTS 3048RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3046RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 2654 4560 4560 4560 4560 4560 4560 4560 4 | A | 24 x 42 Crank Adj Height | AHTS 2442RE CR | 95 | 17 | 07 | 19 | 57 | 2695 |
| 24 x 60 Crank Adj Height AHTS 2460RE CR 109 1897 2272 3268 24 x 60 Crank Adj Height AHTS 2456RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTS 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTS 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTS 3048RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3056RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4366 2654 4560 2654 2654 2654 2654 2654 2654 2654 2654 | | 24 x 48 Crank Adj Height | AHTS 2448RE CR | 99 | 17 | 58 | 20 | 41 | 2795 |
| 24 x 66 Crank Adj Height AHTS 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTS 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTS 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTS 3048RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3060RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3054RE CR 115 2654 4560 30 x 62 Crank Adj Height AHTS 3054RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3054RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4560 4 | | 24 x 54 Crank Adj Height | AHTS 2454RE CR 1 |)4 | 18 | 81 | 22 | 43 | 3263 |
| 24 x 72 Crank Adj Height AHTS 2472RE CR 119 1981 2411 3588 30 x 36 Crank Adj Height AHTS 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTS 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3048RE CR 111 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3054RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3054RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3054RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3054RE CR 129 2169 2654 4560 30 x 72 Crank Adj Height AHTS 3054RE CR 19 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2454RE CR 95 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2454RE CR 109 1897 2272 3268 24 x 60 Crank Adj Height AHTR 2456RE CR 109 1897 2272 3268 24 x 60 Crank Adj Height AHTR 2456RE CR 109 1897 2272 3268 24 x 60 Crank Adj Height AHTR 2456RE CR 109 1897 2272 3268 30 x 36 Crank Adj Height AHTR 2456RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2456RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3056RE CR 19 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3056RE CR 111 1925 2232 3311 30 x 48 Crank Adj Height AHTR 3056RE CR 111 1925 2251 3472 410 30 x 66 Crank Adj Height AHTR 3056RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3056RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3056RE CR 112 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3056RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3056RE CR 129 2140 2609 4336 | ~ | 24 x 60 Crank Adj Height | AHTS 2460RE CR 1 |)9 | 18 | 97 | 22 | 72 | 3268 |
| 30 x 36 Crank Adj Height AHTS 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTS 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3054RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4560 4 | | 24 x 66 Crank Adj Height | AHTS 2466RE CR 1 | 14 | 19 | 59 | 23 | 71 | |
| 30 x 42 Crank Adj Height AHTS 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3054RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3056RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4560 4 | | · - | | | | | | | |
| 30 x 48 Crank Adj Height AHTS 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTS 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3066RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4660 46 | | · - | | | | | | | |
| 30 x 54 Crank Adj Height AHTS 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTS 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3066RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 4560 4560 4560 4560 4560 4560 4 | | , , | | | | | | | |
| 30 x 60 Crank Adj Height AHTS 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTS 3066RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 2654 4560 2654 4560 2654 4560 2654 2654 2654 2654 2654 2654 2654 2654 | | , , | | | | | | | |
| Radius Foot 24 x 36 Crank Adj Height AHTS 3072RE CR 129 2140 2609 4336 30 x 72 Crank Adj Height AHTS 3072RE CR 135 2169 2654 4560 Radius Foot 24 x 36 Crank Adj Height AHTR 2436RE CR 90 1674 1903 2527 24 x 42 Crank Adj Height AHTR 2442RE CR 95 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 24 x 11 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 1105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 66 Crank Adj Height AHTR 3060RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| Radius Foot 24 x 36 Crank Adj Height AHTR 2436RE CR 90 1674 1903 2527 24 x 42 Crank Adj Height AHTR 2442RE CR 95 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2454RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2460RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2011 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 66 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| Radius Foot 24 x 36 Crank Adj Height AHTR 2436RE CR 90 1674 1903 2527 24 x 42 Crank Adj Height AHTR 2442RE CR 95 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2450RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2460RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2460RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3048RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| 24 x 42 Crank Adj Height AHTR 2442RE CR 95 1707 1957 2695 24 x 48 Crank Adj Height AHTR 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | 30 x 72 Grank Adj Height | AHIS 30/2KE CK 1 | 35 | 21 | 69 | 26 | 54 | 4560 |
| 24 x 48 Crank Adj Height AHTR 2448RE CR 99 1758 2041 2795 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3263 24 x 60 Crank Adj Height AHTR 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | Radius Foot | 24 x 36 Crank Adj Height | AHTR 2436RE CR | 90 | 16 | 574 | 19 | 03 | 2527 |
| 24 x 54 Crank Adj Height AHTR 2454RE CR 104 1881 2243 3268 24 x 60 Crank Adj Height AHTR 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | ₽ | 24 x 42 Crank Adj Height | AHTR 2442RE CR | 95 | 17 | 07 | 19 | 57 | 2695 |
| 24 x 60 Crank Adj Height AHTR 2460RE CR 109 1897 2272 3268 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | 24 x 48 Crank Adj Height | AHTR 2448RE CR | 99 | 17 | 58 | 20 | 41 | 2795 |
| 24 x 66 Crank Adj Height AHTR 2466RE CR 114 1959 2371 3581 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | 24 x 54 Crank Adj Height | AHTR 2454RE CR 1 |)4 | 18 | 81 | 22 | 43 | 3263 |
| 24 x 72 Crank Adj Height AHTR 2472RE CR 119 1981 2411 3586 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | 24 x 60 Crank Adj Height | AHTR 2460RE CR 1 |)9 | 18 | 97 | 22 | 72 | 3268 |
| 30 x 36 Crank Adj Height AHTR 3036RE CR 99 1873 2167 3073 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | 24 x 66 Crank Adj Height | AHTR 2466RE CR 1 | 14 | 19 | 59 | 23 | 71 | 3581 |
| 30 x 42 Crank Adj Height AHTR 3042RE CR 105 1912 2232 3311 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| 30 x 48 Crank Adj Height AHTR 3048RE CR 111 1925 2251 3472 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | | | | | | | | |
| 30 x 54 Crank Adj Height AHTR 3054RE CR 117 2007 2389 4108 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| 30 x 60 Crank Adj Height AHTR 3060RE CR 123 2025 2417 4115 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| 30 x 66 Crank Adj Height AHTR 3066RE CR 129 2140 2609 4336 | | , , | | | | | | | |
| | | , , | | | | | | | |
| 30 x /2 Crank Adj Height AHTH 3072RE CR 135 2169 2654 4560 | | | | | | | | | |
| | | 30 x /2 Crank Adj Height | AHTR 3072RE CR | 35 | 21 | 69 | 26 | 54 | 4560 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

To Order, Specify...

- Model Number
- 7 Top Material
- 3 Edge Style and Thickness
- 4 Edge Color
- 6 Additional Options



| | Somet |
|---|--------------------|
| l | Rectangle Crank |
| | |

| Finish Options |
|-------------------------------------|
| Powder Coat - Standard (Ebony only) |

| Top Options | | |
|--------------------------------|---|-----|
| Special LaminateTSP | | cal |
| Custom Cutout (per cutout) TCC | Φ | 107 |

Power & Data Options
Please reference the Power & Data section (page 38) or the Power & Data Price List

Modesty Panel Options Fixed.....

| IAGU | |
|------------|-----------|
| up to 48" | \$ 330 |
| 49" to 60" | \$ 365 |
| 61" to 72" | \$ 402 |

556 | Somet Rectangle Counter Balance Pneumatic

| Questions? | | top > edge > | Laminate PVC | Laminate T-Mold | Laminate Wood | Laminate Soft PVC | Veneer Wood |
|------------------------|---|--|---------------------|--------------------|------------------------------|----------------------|----------------|
| 1.800.876.2120 | | | Flat | Convex | Flat | Bumper | Flat |
| | | | Tid. | Solivex | Tide: | Bampor | , ide |
| | | | | | | | |
| Diad. Fired Dass | | | | | | | |
| Black = Fixed Bases | | edge ordering code (radius corner) > or | LP2R | LT2 | LW2R | LB2R | VW2R |
| | | edge ordering code (square corner) > top thickness > | LP2S 1 ¼" | 1 1/4" | LW2S 1 ¼" | 1 1/4" | VW2S 1 1/4" |
| | | top thickness > | Fluted | . , , | Fluted | . / . | Fluted |
| | | | Tiuteu | | Tiuteu | | Tiuteu |
| | | | | | | | |
| | | edge ordering code (radius corner) > | LPF2R | | LWF2R | | VWF2R |
| | | or edge ordering code (square corner) > | LPF2S | | LWF2S | | VWF2S |
| | | top thickness > | 1 ¼" | | 1 1/4" | | 1 1/4" |
| I.B | less a les | top thickness price > | 1 | 1/4" | 1 | /4" | 1 1/4" |
| Base Style Square Foot | Table Description 24 x 42 Counter Balance Pneumatic | Model # Wt AHTS 2442RE CB 95 | 29 | 77 | 22 | 29 | 3964 |
| Square root | 24 x 48 Counter Balance Pneumatic | AHTS 2448RE CB 99 | 30 | | | 10 | 3964 |
| Ĥ | 24 x 54 Counter Balance Pneumatic | | 31 | | | | 4082 |
| | 24 x 54 Counter Balance Pneumatic | | | | 3531 3573 3689 3725 | | |
| | | AHTS 2460RE CB 109 | 32 | | | | 4565 |
| | 24 x 66 Counter Balance Pneumatic | AHTS 2466RE CB 114 | 32 | | | | 4585 |
| | 24 x 72 Counter Balance Pneumatic | AHTS 2472RE CB 119 | 32 | | | | 4898 |
| | 30 x 42 Counter Balance Pneumatic | AHTS 3042RE CB 105 | 3103 3116 | | 3422 3441 | | 4876 |
| | 30 x 48 Counter Balance Pneumatic | AHTS 3048RE CB 111 | | | | | 4664 |
| | 30 x 54 Counter Balance Pneumatic | AHTS 3054RE CB 117 | 3214 | | 3596 | | 4519 |
| | 30 x 60 Counter Balance Pneumatic | AHTS 3060RE CB 123 | 3248 | | 3639 | | 4696 |
| | 30 x 66 Counter Balance Pneumatic | AHTS 3066RE CB 129 | 33 | | | 48 | 5025 |
| | 30 x 72 Counter Balance Pneumatic | AHTS 3072RE CB 135 | 34 | 09 | 38 | 95 | 5354 |
| Radius Foot | 24 x 42 Counter Balance Pneumatic | AHTR 2442RE CB 95 | 29 | 77 | 3229 | | 3964 |
| Ω. | 24 x 48 Counter Balance Pneumatic | AHTR 2448RE CB 99 | 30 | 27 | 3310 | | 3964 |
| | 24 x 54 Counter Balance Pneumatic | AHTR 2454RE CB 104 | 31 | 67 | 35 | 31 | 4082 |
| | 24 x 60 Counter Balance Pneumatic | AHTR 2460RE CB 109 | 32 | 00 | 35 | 73 | 4565 |
| | 24 x 66 Counter Balance Pneumatic | AHTR 2466RE CB 114 | 32 | 76 | 3689 | | 4585 |
| | 24 x 72 Counter Balance Pneumatic | AHTR 2472RE CB 119 | 32 | 98 | 37 | 25 | 4898 |
| | 30 x 42 Counter Balance Pneumatic | AHTR 3042RE CB 105 | 31 | 03 | 34 | 22 | 4876 |
| | 30 x 48 Counter Balance Pneumatic | AHTR 3048RE CB 111 | 31 | 16 | 34 | 41 | 4664 |
| | 30 x 54 Counter Balance Pneumatic | AHTR 3054RE CB 117 | 3214 | | 3596 | | 4519 |
| | 30 x 60 Counter Balance Pneumatic | AHTR 3060RE CB 123 | | 48 | | 39 | 4696 |
| | 30 x 66 Counter Balance Pneumatic | AHTR 3066RE CB 129 | | 79 | | 48 | 5025 |
| | 30 x 72 Counter Balance Pneumatic | AHTR 3072RE CB 135 | 34 | 09 | 38 | 95 | 5354 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

To Order, Specify...

- Model Number
- 7 Top Material
- 3 Edge Style and Thickness
- 4 Edge Color
- 6 Additional Options


| Top Options | |
|----------------------------|-----------|
| Special LaminateTSP | call |
| Custom Cutout (per cutout) | \$ 107 |

Power & Data Options
Please reference the Power & Data section (page 38) or the Power & Data Price List

Modesty Panel Options Fixed.....

| ixea | |
|------------|-----------|
| up to 48" | \$ 330 |
| 49" to 60" | \$ 365 |
| 61" to 72" | \$ 402 |

Somet Rectangle Counter Balance Pneumatic

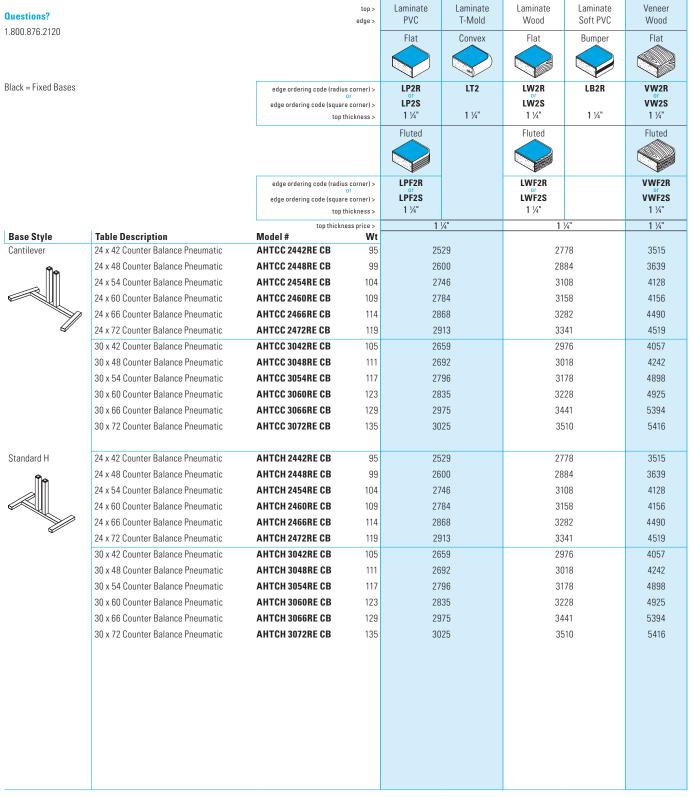

To Order, Specify...

- Model Number
- 7 Top Material
- 3 Edge Style and Thickness
- 4 Edge Color
- 6 Additional Options

| Top Options | | | |
|----------------------------|-----|---|----|
| Special Laminate | TSP | | Ca |
| Custom Cutout (per cutout) | TCC | ¢ | 10 |

Power & Data Options
Please reference the Power & Data section (page 38) or the Power & Data Price List

Modesty Panel Options Fixed.....

| ixea | |
|------------|-----------|
| up to 48" | \$ 330 |
| 49" to 60" | \$ 365 |
| 61" to 72" | \$ 402 |